


SS_LH4_WV-WH


Dual PD, 15M highbay



SS_LH4_WV-WH

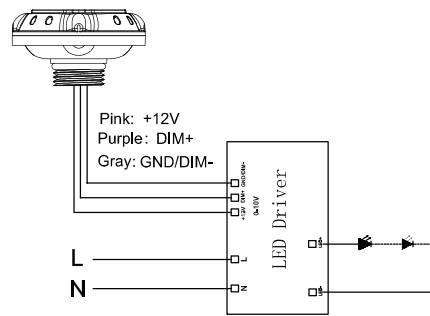

Wiring diagram



Unit:mm



On/off control



Stand-by dimming level



Detection area



10-15M Highbay altitude



Hold time



Stand-by period



Warranty 5 years

01 Technical data

Operating voltage	12±2V DC
Operating current	30mA
Output	DIM 0-10V
Stand-by power	<0.5W
Brightness	0%-100%/Quick setting:70%/80%/90%/100%
Sensitivity	20%/50%/75%/100%
Hold time	10s/1min/10min/30min
IP rating	IP65
Stand-by time	1min/30min/60min/+∞
Stand-by dimming level	10%/20%/30%/50%
Microwave frequency	5.8GHz±75MHz
Microwave power	<0.5mW
Detection angle	150° (wall mounted) 360° (ceiling mounted)
Control line	Pink:+12V; Purple:DIM+; Gray:GND/DIM-
Mounting height	Max.15m(ceiling mounted)
Detection range	Max.15m(ceiling mounted) Max.20m(wall mounted)
Operating temperature	-30°C~+60°C

Note:
Default setting: Brightness:100%, Hold time:1min, Stand-by dimming level:20%, Stand-by time:1min, Sensitivity:100%,

02 Detection coverage

