

4" SLIM BAFFLE WITH SELECTABLE CCT


This dimmable 4" Slim Baffle Trim light is IC rated and installs quickly and easily with spring-loaded brackets. Select your CCT of choice (2700K, 3000K, 3500K, 4000K, 5000K) during installation using the slider switch on the back of the included junction box.

MODELS


DL_SLBF4-10W-27K_5K-#PK

LIGHT DISTRIBUTION ANGLE


SPECTRUM DISTRIBUTION

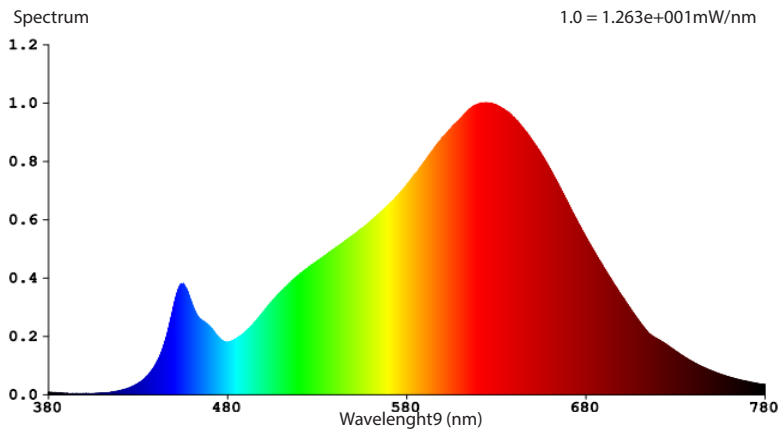

CIE1931 Chromaticity Diagram

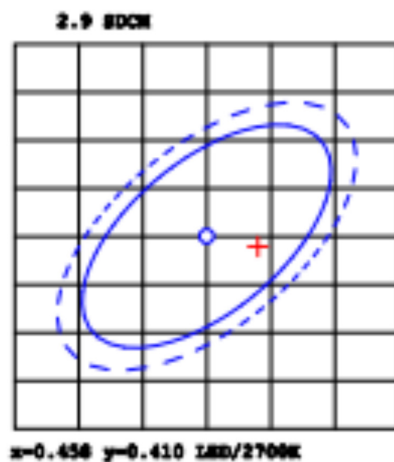

CERTIFICATIONS

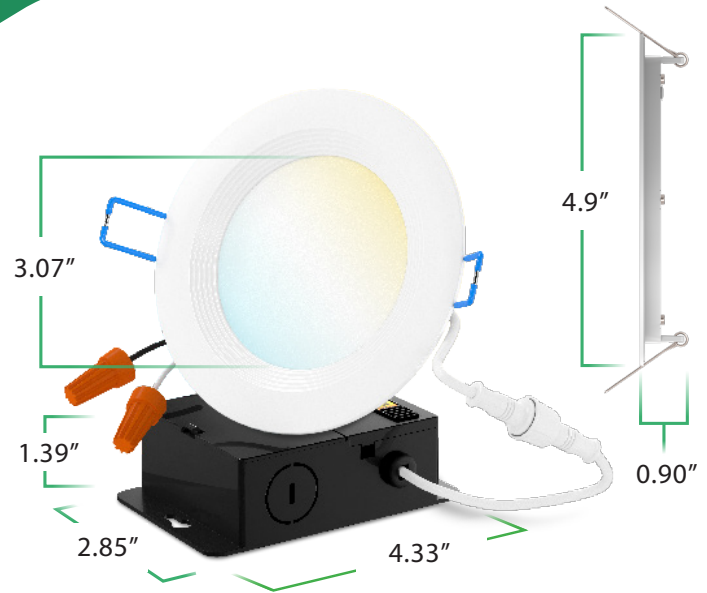

SPECIFICATIONS

Voltage	120V
Wattage	10W
Current	0.11
Power Factor	0.7

LIGHTING PERFORMANCE

Lumens	650
Equivalency	60W
Selectable Color Temperature	2700K-5000K
Color Rendering Index (CRI)	90
Beam Angle	110°
Dimmable	Yes
Efficiency (lm/w)	65
Frequency	≥120Hz
Input Frequency	60Hz
Start Time	≤0.75

ENVIRONMENT

Operating Temperature	-13°F to 104°F
Usage	Indoor

CONSTRUCTION

Housing	Polycarbonate
Weight	0.38 lbs

LIFESPAN

Average Life (Hours)	50,000+
Warranty	7 years