

4" SLIM GIMBAL SELECTABLE LED LIGHT



Select from 5 color temperatures (2700K, 3000K, 3500K, 4000K, 5000K) during install with a simple slider switch on the j-box. This IC rated gimbal quickly installs in your ceiling with spring-loaded brackets, no can required. Swivel and tilt the optic to desired position.

MODELS

DL_G4-12W-27K_5K-6PK

LIGHT DISTRIBUTION ANGLE


SPECTRUM DISTRIBUTION

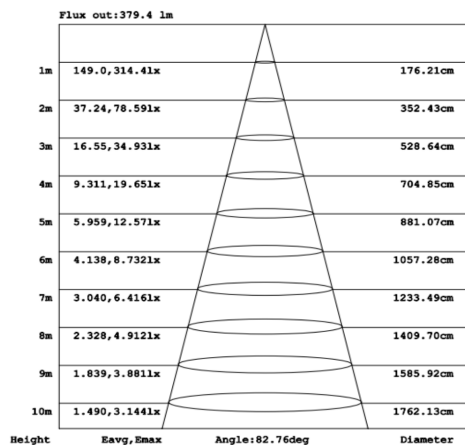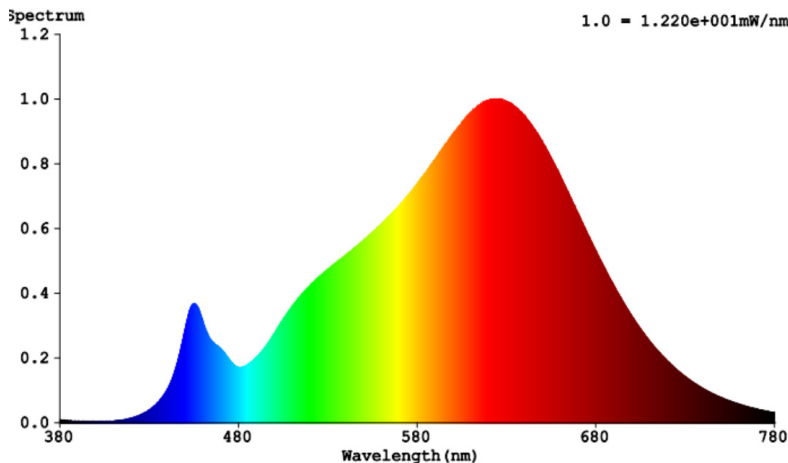

NOTE:

The Curves indicate the illuminated area and the average illumination when the luminaire is at different distances.

CERTIFICATIONS

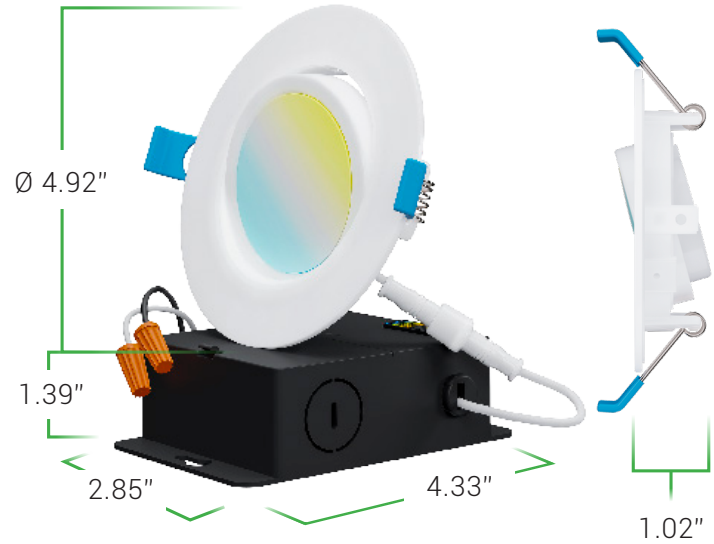

SPECIFICATIONS

Voltage	120V
Wattage	12W
Current	0.105A
Power Factor	0.9

LIGHTING PERFORMANCE

Lumens	750
Equivalency	75W
Selectable Color Temperature	2700K-5000K
Color Rendering Index (CRI)	90
Beam Angle	90°
Dimmable	Yes
Efficiency (lm/w)	62.50
Frequency	≥120Hz
Input Frequency	60Hz
Start Time	≤0.75
Transient Protection	Ring Wave Interference

ENVIRONMENT

Operating Temperature	4°F to 104°F
Suitable for Damp Locations Ingress	Yes

CONSTRUCTION

Housing	Polycarbonate
Weight	0.44lbs

LIFESPAN

Average Life (Hours)	50,000+
Warranty	7 years
Switching Time	>10,000