

6" SLIM SELECTABLE WHITE LED LIGHT


Select the CCT of this dimmable Slim LED downlight during install with the slider switch on back of the included j-box to select preferred color (2700K, 3000K, 3500K, 4000K, 5000K). This 6" 14W Slim is a 100W equivalent and is IC rated. Install fast with spring-loaded brackets.

MODELS


DL_SL6-14W-27K_5K-#PK

LIGHT DISTRIBUTION ANGLE


SPECTRUM DISTRIBUTION

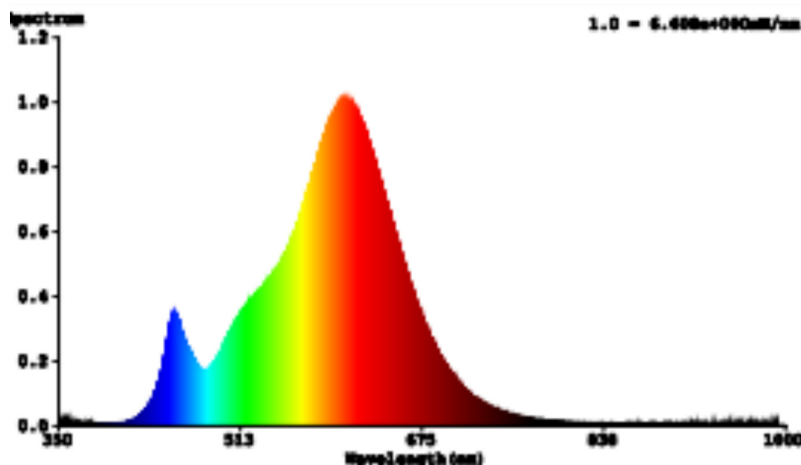

CIE1931 Chromaticity Diagram

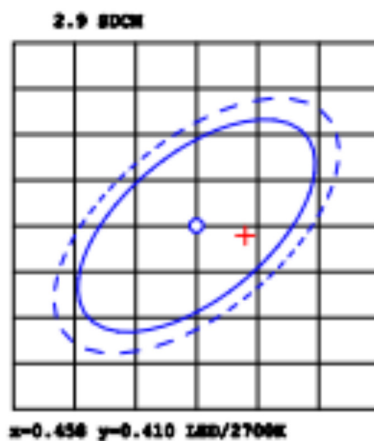

CERTIFICATIONS

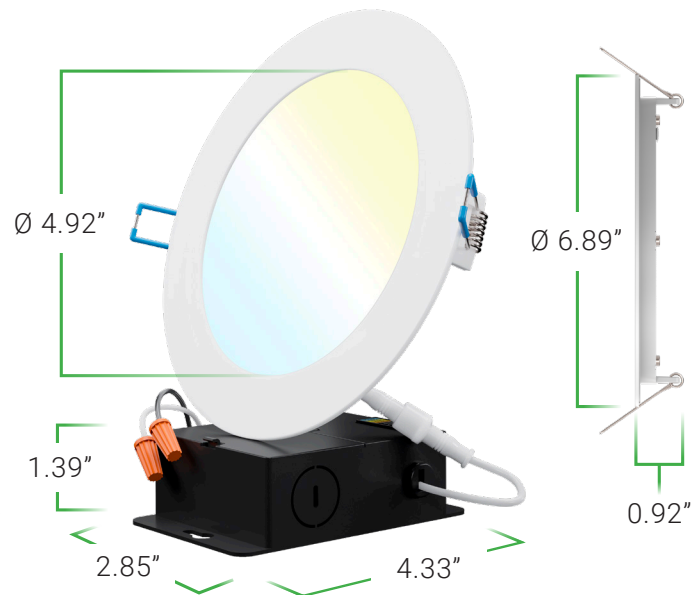

SPECIFICATIONS

Voltage	120V
Wattage	14W
Current	0.120A
Power Factor	0.900

LIGHTING PERFORMANCE

Lumens	850
Equivalency	100W
Selectable Color Temperature	2700K-5000K
Color Rendering Index (CRI)	90
Beam Angle	110°
Dimmable	Yes
Efficiency (lm/w)	60
Frequency	≥120Hz
Input Frequency	60Hz
Start Time	≥0.75

ENVIRONMENT

Operating Temperature	4°F to 104°F
Usage	Indoor

CONSTRUCTION

Housing	Polycarbonate
Weight	0.59lbs

LIFESPAN

Average Life (Hours)	50,000+
Warranty	7 years