

BR30 LED BULB, SELECTABLE CCT


Easily tune this dimmable flood light to select from 3 color temperatures (2700K, 3000K, 5000K) to suit your needs. Adjust the slider switch on the bulb to change CCTs. Great for multi-use rooms. Fits 5" and 6" recessed cans. This instant on BR30 offers a 25,000 hour lifespan.

MODELS


BR30-11W-27K_5K-6PK BR30-11W-27K_5K-10PK
BR30-11W-27K_5K-12PK

LIGHT DISTRIBUTION ANGLE

SPECTRUM DIAGRAM

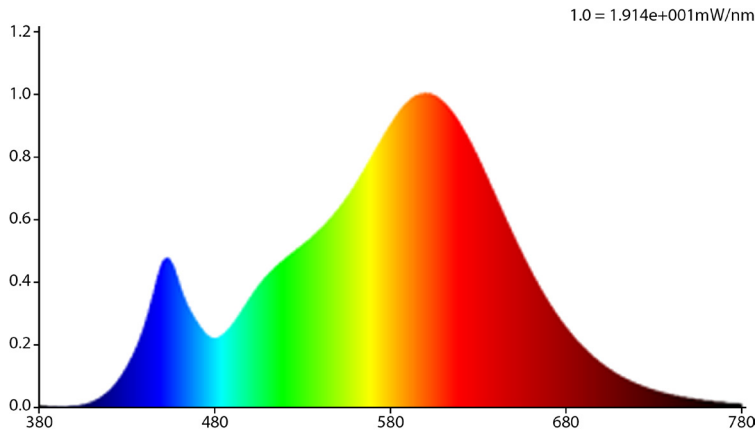

CHROMATICITY DIAGRAM CIE1931

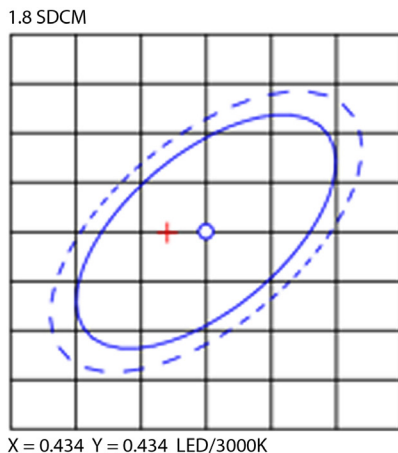

SPECIFICATIONS

Voltage	120V
Wattage	11W
Current	0.12A
Power Factor	1.0
LIGHTING PERFORMANCE	
Lumens	850
Equivalency	90W
Color Temperature Changing	2700K, 3000K, 5000K
Color Rendering Index (CRI)	80
Beam Angle	110°
Dimmable	Yes 10%-100%
Frequency	60Hz

ENVIRONMENT

Operating Temperature	4°F to 104°F
Suitable for Damp Locations Ingress	Yes

CONSTRUCTION

Housing	Aluminum+PC
Weight	0.16lbs

LIFESPAN

Average Life (Hours)	25,000+
Warranty	5 years
Switching Time	>10,000

CERTIFICATIONS



*No Energy Star certification for 2200K, 5500K, and 6000K