

## BR30 LED BULB


The dimmable BR30 LED Bulb is available in multiple color temperatures. A bulb replacement for downlights, the BR30 offers a 25,000 hour lifetime to reduce relamping costs. Suitable for 5" or 6" recessed cans. Consumes only 11W yet is a 65W equivalent bulb.

## MODELS

- BR30-11W-22K-#
- BR30-11W-27K-#
- BR30-11W-3K-#
- BR30-11W-4K-#
- BR30-11W-5K-#
- BR30-11W-55K-#
- BR30-11W-6K-#


## LIGHT DISTRIBUTION ANGLE

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

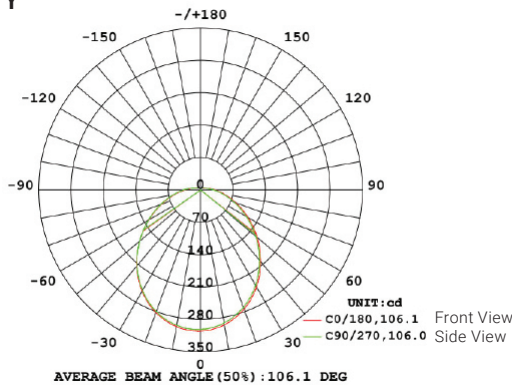

### NOTE:

The Curves indicate the illuminated area and the average illumination when the luminaire is at different distances.

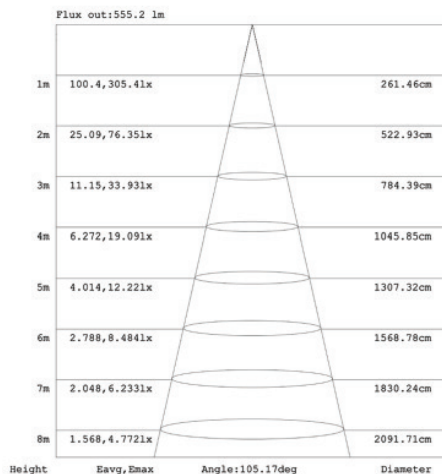

## CERTIFICATIONS



\*No Energy Star certification for 2200K, 5500K, and 6000K



## SPECIFICATIONS

|              |        |
|--------------|--------|
| Voltage      | 120V   |
| Wattage      | 11W    |
| Current      | 0.123A |
| Power Factor | 0.70   |

### LIGHTING PERFORMANCE

|                             |             |
|-----------------------------|-------------|
| Lumens                      | 850         |
| Equivalency                 | 90W         |
| Color Temperature           | 2200K-6000K |
| Color Rendering Index (CRI) | 80          |
| Beam Angle                  | 110°        |
| Dimmable                    | Yes         |
| Efficiency (lm/w)           | 77          |
| Frequency                   | 60Hz        |

### ENVIRONMENT

|                                     |              |
|-------------------------------------|--------------|
| Operating Temperature               | 4°F to 104°F |
| Suitable for Damp Locations Ingress | Yes          |

### CONSTRUCTION

|         |             |
|---------|-------------|
| Housing | Aluminum+PC |
| Weight  | 0.20lbs     |

### LIFESPAN

|                      |         |
|----------------------|---------|
| Average Life (Hours) | 25,000+ |
| Warranty             | 5 years |
| Switching Time       | >30,000 |