

## BAFFLE 4" LED DOWNLIGHT


Dimmable Recessed LED Baffle 4" Downlight is suitable for damp locations. The included mounting brackets secure it in your existing 4" can. Connect with the included E26 adapter or TP24 connector. It features CRI80 for true color rendering, making it ideal for retail, restaurants, kitchens, and art galleries. This 11W is equivalent to 40W.

### MODELS


- DL\_BFDR4-11W-27K-#
- DL\_BFDR4-11W-4K-#
- DL\_BFDR4-11W-6K-#
- DL\_BFDR4-11W-3K-#
- DL\_BFDR4-11W-5K-#

### LIGHT DISTRIBUTION ANGLE

#### SPECTRUM DISTRIBUTION

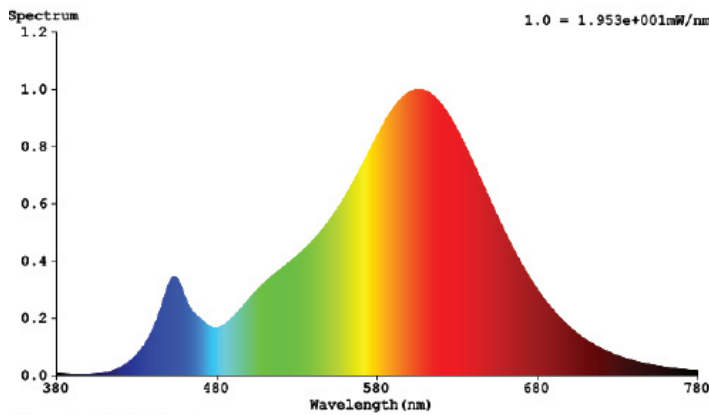


CIE1931 Chromaticity Diagram

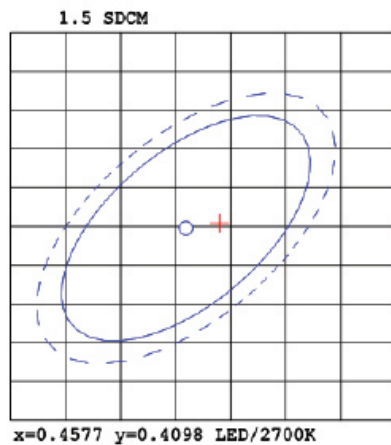

### CERTIFICATIONS



\*No Energy Star certification for 2200K, 5500K, and 6000K

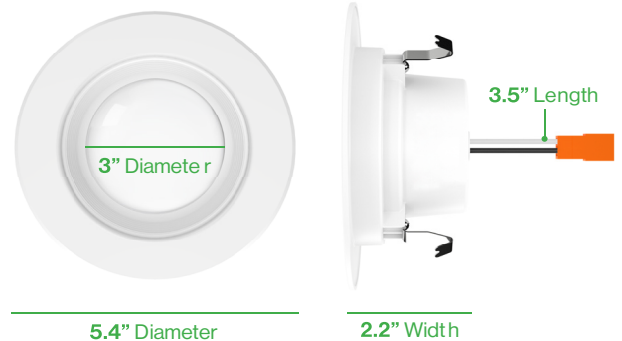

### SPECIFICATIONS

Voltage	120V
Wattage	11W
Current	0.090A
Power Factor	0.9

#### LIGHTING PERFORMANCE

Lumens	660
Equivalency	60W
Color Temperature	2700K-5000K
Color Rendering Index (CRI)	90+
Beam Angle	90°
Dimmable	Yes
Efficiency (lm/w)	70.0
Frequency	60Hz

#### ENVIRONMENT

Operating Temperature	4°F to 104°F
Suitable for Damp Locations Ingress	Yes

#### CONSTRUCTION

Housing	Polycarbonate
Weight	0.34lbs

#### LIFESPAN

Average Life (Hours)	35,000+
Warranty	7 years
Switching Time	>30,000