

BAFFLE 5/6" LED DOWNLIGHT


One of our brightest downlights, the damp rated Baffle 5/6" Downlight boasts a brightness of 1050 lumens. Modify the included spring to fit existing 5" or 6" recessed cans. With a 75W equivalency, the 13W LED shines a bright 1050 lumens in a wide flood 90° beam angle. IC Rated.

MODELS


DL_BFWR56-13W-27K-# DL_BFWR56-13W-3K-#
DL_BFWR56-13W-4K-# DL_BFWR56-13W-5K-#

LIGHT DISTRIBUTION ANGLE

SPECTRUM DISTRIBUTION

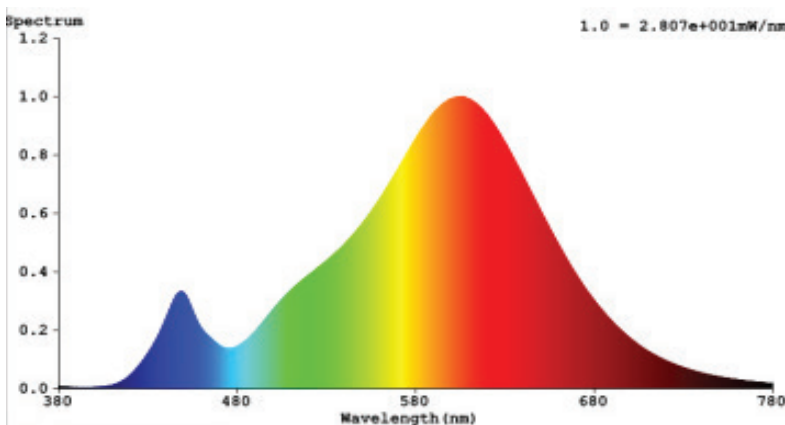

CIE1931 Chromaticity Diagram

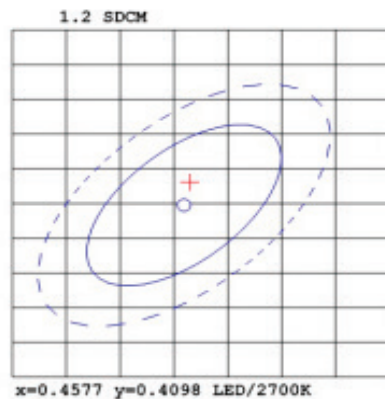

CERTIFICATIONS



*No Energy Star certification for 2200K, 5500K, and 6000K



SPECIFICATIONS

| | |
|--------------|--------|
| Voltage | 120V |
| Wattage | 13W |
| Current | 0.115A |
| Power Factor | 0.9 |

LIGHTING PERFORMANCE

| | |
|-----------------------------|-------------|
| Lumens | 1050 |
| Equivalency | 75W |
| Color Temperature | 2700K-6000K |
| Color Rendering Index (CRI) | 80 |
| Beam Angle | 90° |
| Dimmable | Yes |
| Efficiency (lm/w) | 74 |
| Frequency | 60Hz |

ENVIRONMENT

| | |
|-------------------------------------|--------------|
| Operating Temperature | 4°F to 104°F |
| Suitable for Damp Locations Ingress | Yes |

CONSTRUCTION

| | |
|---------|---------------|
| Housing | Polycarbonate |
| Weight | 0.45lbs |

LIFESPAN

| | |
|----------------------|---------|
| Average Life (Hours) | 35,000+ |
| Warranty | 7 years |
| Switching Time | >30,000 |