

## BAFFLE 5/6" LED DOWNLIGHT


The damp rated and dimmable Recessed LED Baffle 5/6" Downlight with a bright 965 lumens adjusts to fit 5" or 6" cans. Easily convert the included mounting bracket with a screwdriver. Use the included TP24 connector or E26 adapter base, depending on what your existing can accepts. Uniformed, baffled grooves minimize glare. Consuming only 13W, this light is equivalent to a 75W bulb.

## MODELS


DL\_BFDR56-13W-27K-#      DL\_BFDR56-13W-3K-#  
DL\_BFDR56-13W-4K-#      DL\_BFDR56-13W-5K-#  
DL\_BFDR56-13W-6K-#

## LIGHT DISTRIBUTION ANGLE

### SPECTRUM DISTRIBUTION

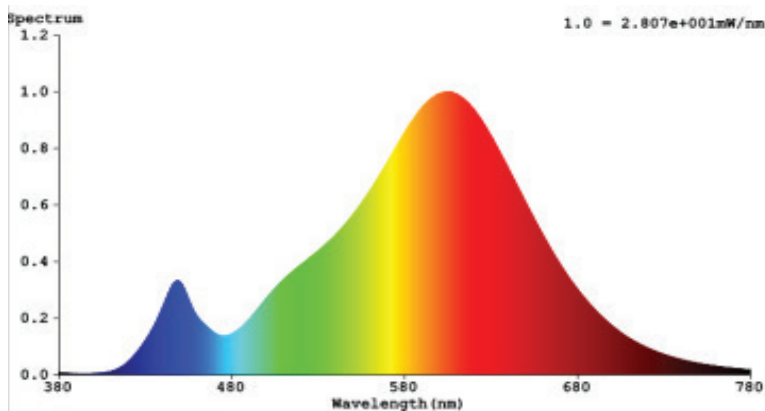


### CIE1931 Chromaticity Diagram

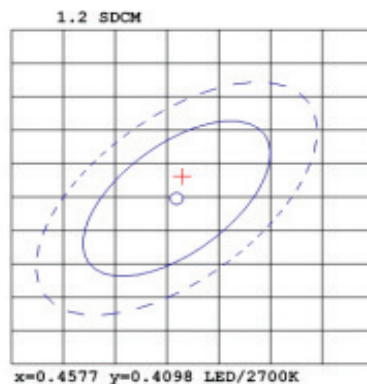

## CERTIFICATIONS



\*No Energy Star certification for 2200K, 5500K, and 6000K

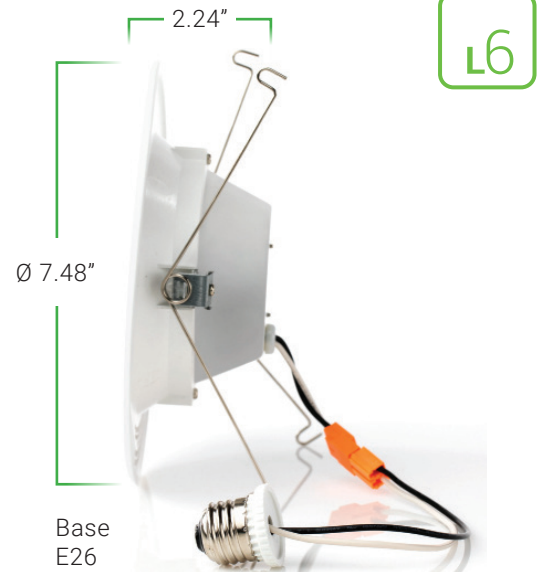

## SPECIFICATIONS

Voltage	120V
Wattage	13W
Current	0.115A
Power Factor	0.9

### LIGHTING PERFORMANCE

Lumens	965
Equivalency	75W
Color Temperature	2700K-5000K
Color Rendering Index (CRI)	80
Beam Angle	90°
Dimmable	Yes
Efficiency (lm/w)	74
Frequency	60Hz

### ENVIRONMENT

Operating Temperature	4°F to 104°F
Suitable for Damp Locations Ingress	Yes

### CONSTRUCTION

Housing	Polycarbonate
Weight	0.45lbs

### LIFESPAN

Average Life (Hours)	35,000+
Warranty	7 years
Switching Time	>30,000