

2x2 LED CEILING PANEL WITH SELECTABLE CCT


Use the slider switch on the back of the ceiling panel to select your preferred color temperature (4000K, 5000K, 6000K) during installation. Dust-proof and dimmable (0-10V), this fixture is suitable for recessed or suspended installation in standard 2x2 drop ceilings.

MODELS



PN_SM2x2-40W-0K-#PK

LIGHT DISTRIBUTION ANGLE

SPECTRUM DISTRIBUTION

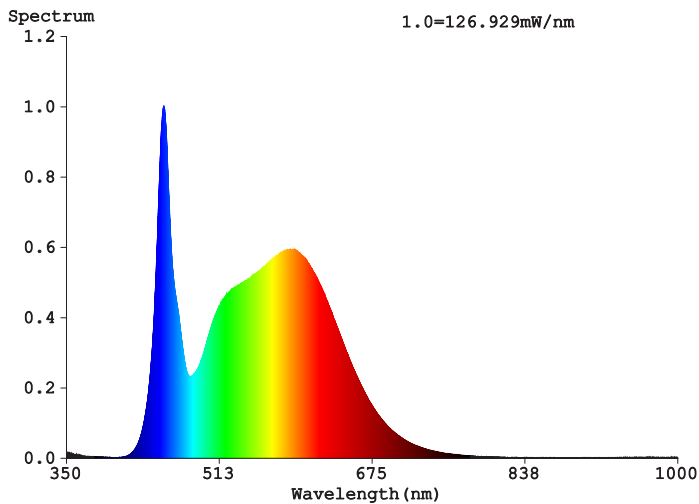

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

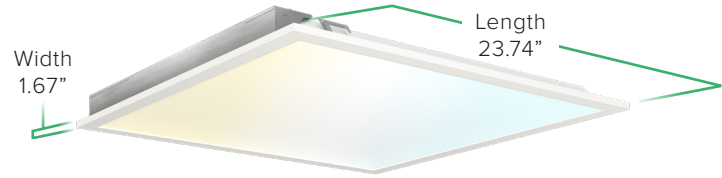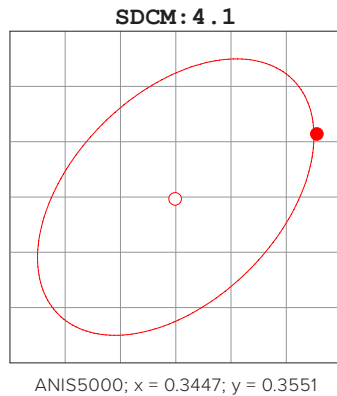

SPECIFICATIONS

Voltage	100-277V
Wattage	40W
Current	0.44A
Power Factor	0.9

LIGHTING PERFORMANCE

Lumens	4400
Equivalency	100W HID
Color Temperature (K)	4000K, 5000K, 6000K
Color Rendering Index (CRI)	80
Beam Angle	120°
Dimmable	0-10V
Efficiency (lm/w)	110
Frequency	60Hz

ENVIRONMENT

Operating Temperature	-4°F to 113°F
Suitable for Damp Locations Ingress	Yes

CONSTRUCTION

Housing	SPCC+PS Lens
Weight	4.18lbs

LIFESPAN

Average Life (Hours)	50,000+
Warranty	10 years

CERTIFICATIONS

