

DISK 5/6" LED DOWNLIGHT 12W

Direct wire this IC rated Disk 5/6" LED Downlight 12W to your junction box and install into your ceiling without a can. Provides instant on, bright light (850 lm) with a sleek, modern look and a high CRI of 90+ and a 300° beam angle for a very wide flood light. Suitable for narrow ceiling space.


MODELS

DL_DK56-12W-27K-# DL_DK56-12W-3K-# DL_DK56-12W-4K-#
DL_DK56-12W-5K-# DL_DK56-12W-6K-#

LIGHT DISTRIBUTION ANGLE


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Average Beam Angle (50%): 324.5°

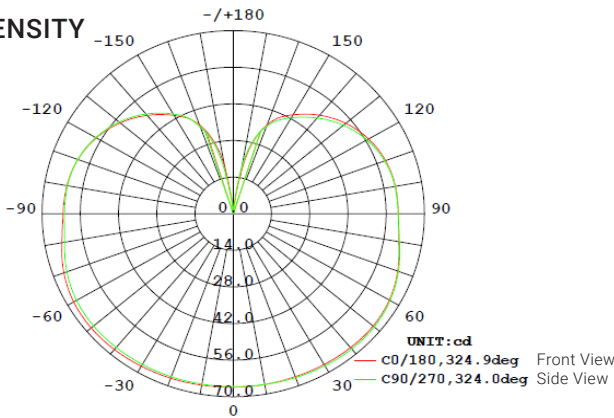

NOTE:

The Curves indicate the illuminated area and the average illumination when the luminaire is at different distances.

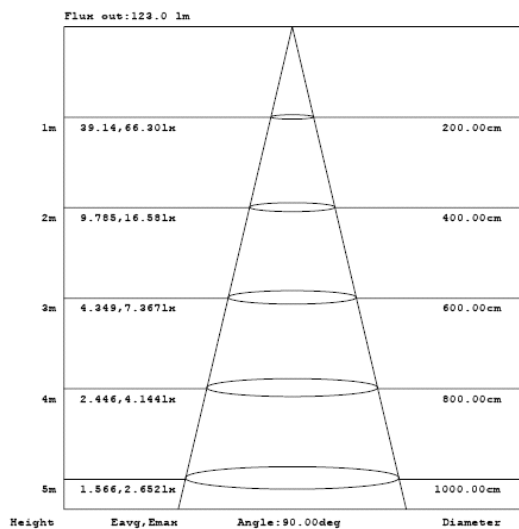


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

CERTIFICATIONS



*No Energy Star certification for 2200K, 5500K, and 6000K

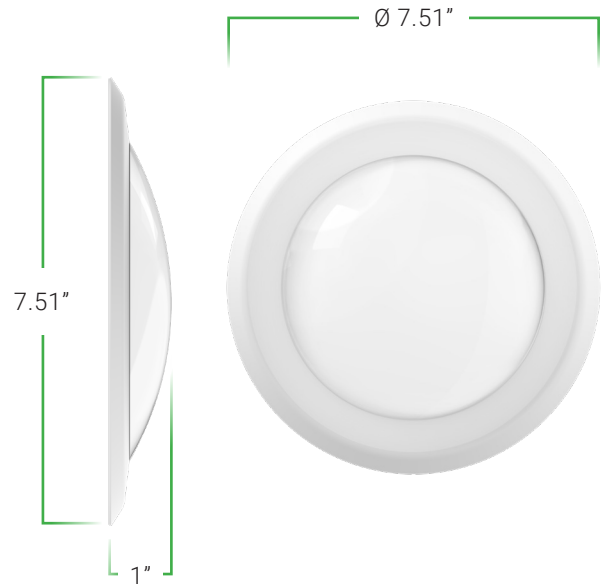

SPECIFICATIONS

Voltage	120V
Wattage	12W
Current	0.140A
Power Factor	0.780

LIGHTING PERFORMANCE

Lumens	850
Equivalency	80W
Color Temperature	2700K-6000K
Color Rendering Index (CRI)	90
Beam Angle	90°
Dimmable	Yes
Efficiency (lm/w)	65.38
Frequency	60Hz

ENVIRONMENT

Operating Temperature	4°F to 104°F
Suitable for Damp Locations Ingress	Yes

CONSTRUCTION

Housing	Steel & PBT
Weight	0.33lbs

LIFESPAN

Average Life (Hours)	50,000+
Warranty	7 years