

DISK 15W LED DOWNLIGHT

Direct wire this IC rated Disk 5/6" LED Downlight to your junction box and install into your ceiling without a can. Provides instant on, bright light (1050 lm) with a sleek, modern look and a high CRI of 90+ and a 90° beam angle for a wide flood light. Suitable for narrow ceiling space. Features a 15W power consumption with 100W equivalency.


MODELS

DL_DK56-15W-27K-# DL_DK56-15W-4K-#
DL_DK56-15W-3K-# DL_DK56-15W-5K-#

LIGHT DISTRIBUTION ANGLE


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Average Beam Angle (50%):
88.3°F

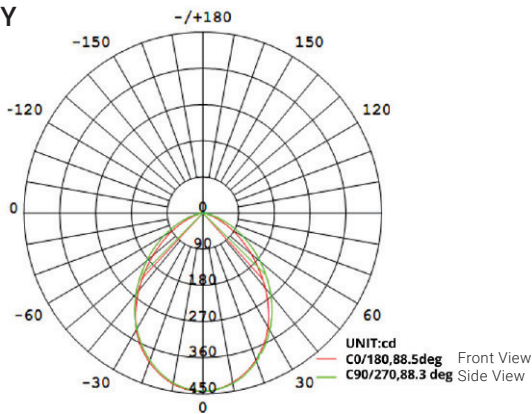

NOTE:


The Curves indicate the illuminated area and the average illumination when the luminaire is at different distances.

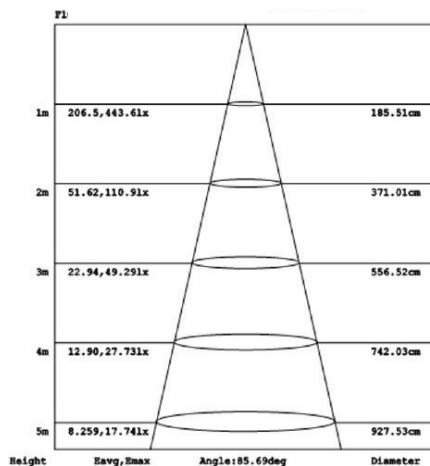

CERTIFICATIONS



*No Energy Star or ETL certification for 2200K, 5500K, and 6000K

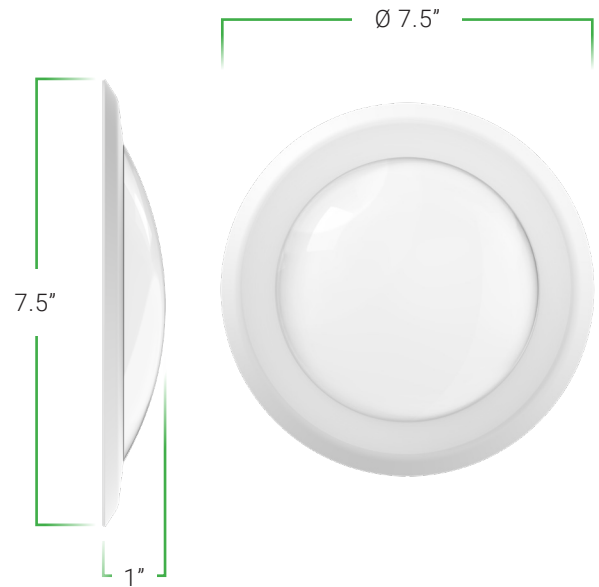

SPECIFICATIONS

Voltage	120V
Wattage	15W
Current	0.119A
Power Factor	0.70

LIGHTING PERFORMANCE

Lumens	1050
Equivalency	100W
Color Temperature	2700K-6000K
Color Rendering Index (CRI)	90
Beam Angle	90°
Dimmable	Yes, 10-100%
Efficiency (lm/w)	60
Frequency	60Hz

ENVIRONMENT

Operating Temperature	4°F to 104°F
Suitable for Damp Locations Ingress	Yes

CONSTRUCTION

Housing	Steel & PBT
Weight	0.39lbs

LIFESPAN

Average Life (Hours)	50,000+
Warranty	7 years