

G25 LED BULB FILAMENT, DUSK TO DAWN

Dusk to Dawn sensor with auto on/off based on light levels works well in porch wall sconces, outdoor chandeliers, and pendant fixtures in exterior dining areas. This wet rated G25 features low wattage and retro styling with LED filament inside a glass housing.


MODELS

G25_CD2D-3W-27K-# G25_CD2D-3W-3K-#
 G25_CD2D-3W-4K-# G25_CD2D-3W-5K-#

LIGHT DISTRIBUTION ANGLE

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Average Beam Angle (50%): 322.0°F

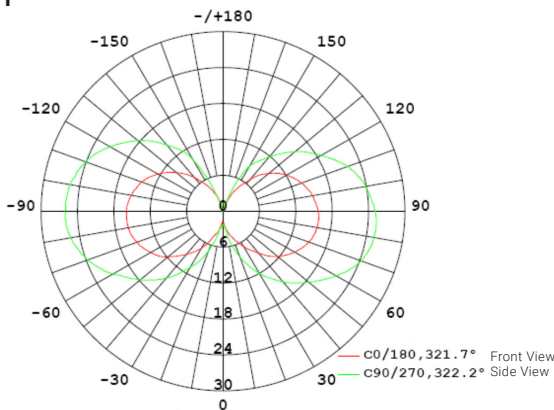

NOTE:

The Curves indicate the illuminated area and the average illumination when the luminaire is at different distances.

1m	5.960, 7.907lx	200.00cm
2m	1.490, 1.977lx	400.00cm
3m	0.6622, 0.8785lx	600.00cm
4m	0.3725, 0.4942lx	800.00cm
5m	0.2384, 0.3163lx	1000.00cm
6m	0.1655, 0.2196lx	1200.00cm
7m	0.1216, 0.1614lx	1400.00cm
8m	0.0931, 0.1235lx	1600.00cm
9m	0.0736, 0.0976lx	1800.00cm
10m	0.0596, 0.0791lx	2000.00cm

CERTIFICATIONS



SPECIFICATIONS

Voltage	120V
Wattage	3.5W
Current	0.040A
Power Factor	0.700

LIGHTING PERFORMANCE

Lumens	350
Equivalency	40W
Color Temperature	2700K-5000K
Color Rendering Index (CRI)	80
Beam Angle	300°
Dimmable	No
Efficiency (lm/w)	100
Frequency	60Hz

ENVIRONMENT

Operating Temperature	4°F to 104°F
Suitable for Wet Locations Ingress	Yes

CONSTRUCTION

Housing	Glass
Weight	0.09lbs

LIFESPAN

Average Life (Hours)	15,000+
Warranty	5 years
Switching Time	>35,000