

## GIMBAL 5/6" LED DOWNLIGHT

Sunco's Gimbal 5/6" recessed lighting fixtures are instant on with the latest in LED flicker free technology for maximum eye comfort. Directly install gimbal fixture to the ceiling for instant bright light in your kitchen, family room, bedroom, bathroom and common areas in your home or office.


### MODELS

DL\_G56-12W-27K-#      DL\_G56-12W-3K-#  
DL\_G56-12W-4K-#      DL\_G56-12W-5K-#

### LIGHT DISTRIBUTION ANGLE


#### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Average Beam Angle (50%): 88.3°F

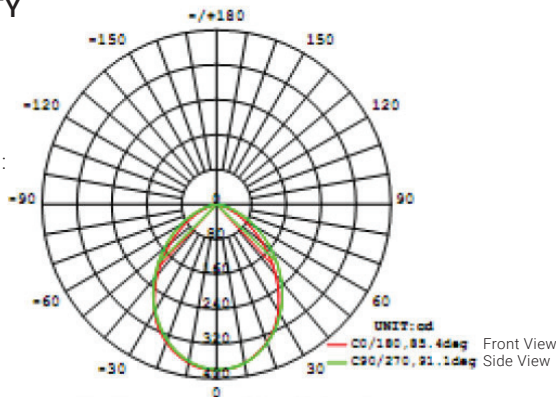

#### NOTE:


The Curves indicate the illuminated area and the average illumination when the luminaire is at different distances.

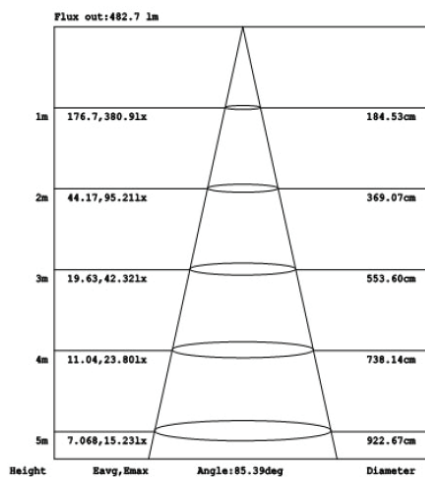

### CERTIFICATIONS



\*No Energy Star certification for 2200K, 5500K, and 6000K

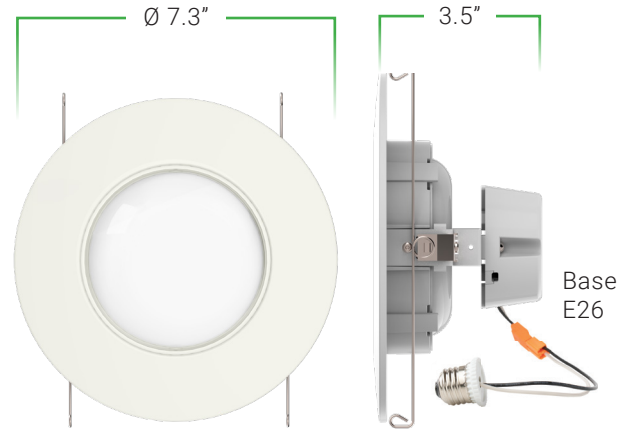

### SPECIFICATIONS

|              |        |
|--------------|--------|
| Voltage      | 120V   |
| Wattage      | 12W    |
| Current      | 0.110A |
| Power Factor | 0.90   |

#### LIGHTING PERFORMANCE

|                             |              |
|-----------------------------|--------------|
| Lumens                      | 800          |
| Equivalency                 | 60W          |
| Color Temperature           | 2700K-5000K  |
| Color Rendering Index (CRI) | 80           |
| Beam Angle                  | 90°          |
| Dimmable                    | Yes, 10-100% |
| Efficiency (lm/w)           | 72.1         |
| Frequency                   | 60Hz         |

#### ENVIRONMENT

|                                     |              |
|-------------------------------------|--------------|
| Operating Temperature               | 4°F to 104°F |
| Suitable for Damp Locations Ingress | Yes          |

#### CONSTRUCTION

|         |               |
|---------|---------------|
| Housing | Polycarbonate |
| Weight  | 1.07lbs       |

#### LIFESPAN

|                      |         |
|----------------------|---------|
| Average Life (Hours) | 35,000+ |
| Warranty             | 7 years |
| Switching Time       | >30,000 |