






MOTION SHOP LIGHT

Install Guide and Manual

COMPONENTS

- 
X2
 Chain Link
- 
X4
 "S" Hook
- 
X2
 Screw Eye Hook
- 
X6
 Plastic Anchor
- 
X4
 Screw



EASY INSTALLATION

Required Tools: Drill, Ladder, Hammer, Pliers, Tape Measure, Pencil.




Turn Power OFF


- Turn off circuit breaker that provides power to the light switch for the recessed lights.
- Mounting surface must be able to support the weight of the fixture.
 - Plaster board - #8 eye hook screw with plastic anchors, or expansion bolts (not included);
 - Plaster board thickness should be 3/8 inch.




- Attach two anchors to ceiling. Spacing between hooks should be 47.25 inches apart, then screw in the screw eye hooks into the anchors.



- Depending on your lighting plan, space the anchors accordingly.
 - Link up to 4



- Install one S hook into each end of the chain, then crimp the end attached to the chain with pliers. Leaving the other side open.
- Install the S hook from one end of the chain into the end cap, then crimp the hook with pliers. Repeat on the other side.



- Hang the loose end of the S hook chain on screw eye hook in ceiling.



Turn Power ON

- Plug in power cord to electrical outlet.
- Turn on circuit breaker and test light.

WARNING

All electrical connections must be in accordance with local and National Electric Code (N.E.C.) standards. Consult a qualified electrician if you are unfamiliar with proper electrical wiring connections. Please review instructions carefully before proceeding.

WARNING: Risk of fire or electric shock. Do not alter, relocate or remove wiring during installation.

This fixture complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: Not for use with dimmers. Do not install directly over a heat source.






SPECIFICATIONS

Voltage	120V
Wattage	40W
Suitable for Locations Ingress	Damp
Housing	Aluminum+PC
Weight	2.70lbs
Warranty	7 years

MOTION SHOP LIGHT

Install Guide and Manual

COMPONENTS

- 
X2
 Chain Link
- 
X4
 "S" Hook
- 
X2
 Screw Eye Hook
- 
X6
 Plastic Anchor
- 
X4
 Screw




EASY INSTALLATION

Required Tools: Drill, Ladder, Hammer, Pliers, Tape Measure, Pencil.




Turn Power OFF


- Turn off circuit breaker that provides power to the light switch for the recessed lights.
- Mounting surface must be able to support the weight of the fixture.
 - Plaster board thickness should be 3/8 inch.




- Install 4 plastic anchors 46.5 inches apart and 3.189 inches apart, screw in an eye hook into each anchor. Gap between the ceiling and the cap nut should be 0.75 inch.
 - Recommended screw dimensions: ST4X30



- Depending on your lighting plan, space the anchors accordingly.
 - Link up to 4



- Lift fixture up to screws and slide to one side to secure into place. Fixture should be firmly fixed against screws.



- Plug in power cord to electrical outlet.




Turn Power ON

- Turn on circuit breaker and test light.

STYLE 1 AND STYLE 2 OF INFRARED INDUCTION RANGE

STYLE 1

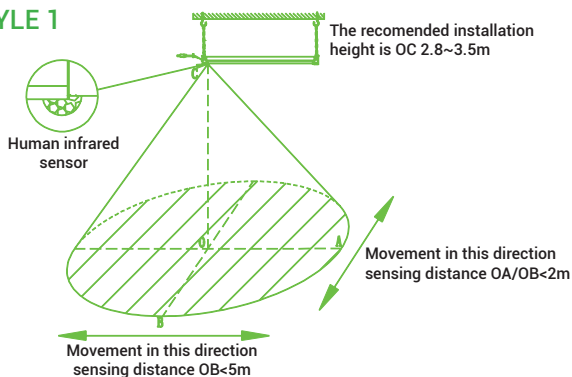

STYLE 2

