

PAR38 PLUS BRIGHT LED BULB

Sunco's PAR38 Plus combines an impressive 1800 lumens with low 15W wattage for a perfect balance of brightness and efficiency. Seamlessly dimmable and wet-rated, this bulb provides a wide flood 90° beam angle for exceptional performance in both interior and exterior locations.


MODELS

PAR38-15W-3K-#PK


PAR38-15W-5K-#PK

LIGHT DISTRIBUTION ANGLE

SPECTRUM DISTRIBUTION

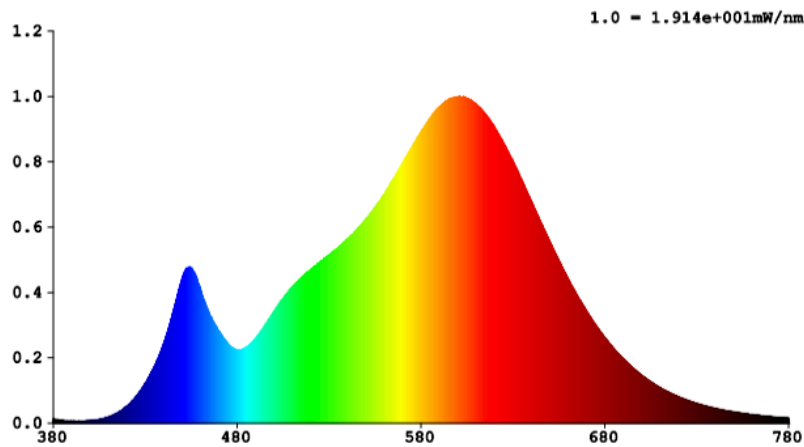

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

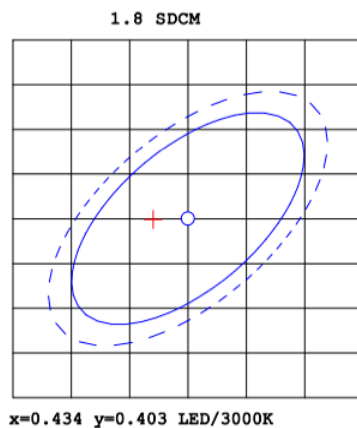

CERTIFICATIONS



SPECIFICATIONS

| | |
|----------------------|-----------------|
| Voltage | 120V |
| Wattage | 15W |
| Current | 0.175A |
| Power Factor | 0.7 |
| Transient Protection | 2500V Ring Wave |
| Start Time | ≤0.75 |

LIGHTING PERFORMANCE

| | |
|-----------------------------|--------------|
| Lumens | 1800 |
| Equivalency | 150W |
| Color Temperature | 3000K, 5000K |
| Color Rendering Index (CRI) | 80 |
| Beam Angle | 100° |
| Dimmable | Yes |
| Efficiency (lm/w) | 93.34 |
| Frequency | 60Hz |

ENVIRONMENT

| | |
|------------------------------------|----------------|
| Operating Temperature | -13°F to 104°F |
| Suitable for Wet Locations Ingress | Yes |

CONSTRUCTION

| | |
|---------|-------------|
| Housing | Aluminum+PC |
| Weight | 0.23lbs |

LIFESPAN

| | |
|----------------------|---------|
| Average Life (Hours) | 15,000+ |
| Warranty | 5 years |
| Switching Time | >10,000 |