



WWW.NKUKU.COM  
T:+44(0)1803 866847  
E:INFO@NKUKU.COM

---

ASSEMBLY INSTRUCTIONS

# NGARI OUTDOOR LIGHT

Thank you for purchasing the Ngari Outdoor Light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Please keep these instructions for future reference

## WARNING!

It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE wiring regulations and the building regulations. This is a Class I product and must be earthed. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure no other person can restore the electrical supply without your knowledge. If you are in any doubt please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting make a note of the connections. Always use the correct type and wattage bulb. Never exceed the wattage stated. When changing bulbs, always switch off the power and allow the old bulb to cool down before handling. Dispose of used bulbs carefully. This product is suitable for mounting on normal flammable surfaces.

The luminaire is rated IP44 and is suitable for outdoor or indoor use.

Using a dimmer switch

This product is suitable for use with a dimmer switch.

## FIXING INSTRUCTIONS

Make sure you have the following items which are required to install this light fitting: Small electrical screwdriver, cross head screwdriver and insulation tape.

### STEP 1

If replacing an existing fitting this must be completely removed before installation of a new product. Before removing the existing fitting or ceiling rose, carefully note the position of each set of wires. Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L or N of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. The ring/loop will remain live unless isolated at the mains or circuit breaker regardless of the position of the wall switch.

### STEP 2

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

Check that.....

You have correctly identified the house wires.


The connections are tight.

No loose strands have been left out of the connection block.

The lid is fitted back onto the terminal block case.

Please note:

A fourth connection block is provided should you need it to make loop connection. You must then wrap the connection block in tape covering at least 2cm of the wiring on each side.

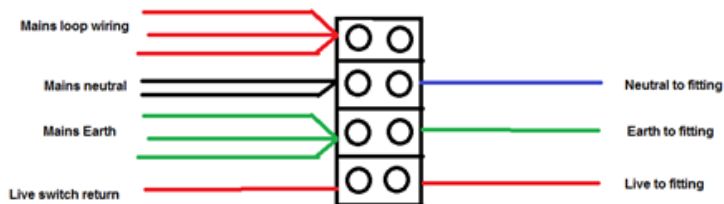

### Step 3

Using the screws provided in the fixing pack, secure the luminaire to the wall using suitable raw plugs. Take care when drilling fixing holes to avoid damaging any concealed wiring and pipes.

### STEP 4

Install an E27 bulb not exceeding a maximum wattage of 40W. When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Unscrew the glass shade to install the bulb. Dispose of used bulbs carefully. Do not exceed the wattage stated.

### STEP 5

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

### CARE AND CLEANING

Finish – We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

### SAFETY INFORMATION

For your safety, switch off the mains supply before changing light bulbs or cleaning.