




EnergyShroom PB300 Air

Thank you for choosing EnergyShroom PB300 Air Powerbank by boAt to power up your cherished devices. It is a high capacity, 10000mAh portable charging device that utilizes Li-ion polymer battery and is built for a safe, fast and efficient user experience. It has a compact and lightweight design featuring an LED Display for battery status. It charges your beloved devices such as cell phones, tablets, MP3 players, digital cameras, etc. It has a Type C (2-way) input interface and 1USB-A & 1Type C (2-way) output interfaces to make for seamless connectivity.

Contents -

- 1x EnergyShroom PB300 Air
- 1x Manual
- 1x Type C Cable
- 1x Warranty Card
- 1x Strap

Product Overview -

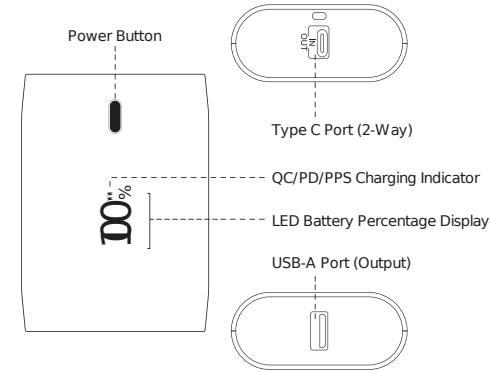

Features

- Supports Type C (2-Way) charging Input ports along with 1USB-A and a Type C (2-Way) Output ports
- Built-in 12-layer Smart IC protection from short circuit, over charge & over discharge.
- Intelligent input/output control with LED Battery Display.
- Supports 2-way 22.5W (Max) fast charging including Quick Charge 3.0, Power Delivery and PPS protocol support.
- Ultra-Durability including High Temperature and Scratch Resistance.
- Compact & Lightweight design with strap for easy handling.
- Pass-through charging allows charging the Powerbank while it charges your devices.

LED Functions

- Press the power button once to switch the LED display on and see the charging status of the powerbank.
- The LED Display will turn on to indicate the battery status of the Powerbank.
- When your Powerbank or device uses Quick Charge 3.0, Power Delivery or PPS fast charging/discharging, the LED Display will show two green electric symbols on the top right beside the battery percentage.

Front

Button Functions

- Press the power button once to switch the Powerbank and LED Display On and see the Powerbank's charging status.
- To switch the Powerbank and LED Display Off, press the power button twice.

Charging EnergyShroom PB300 Air

- Connect the Type-C connector to the Type C port of the Powerbank.
- Then, connect the USB-A/ Type-C connector to the adaptor or laptop/computer USB port.
- The LED display will turn on to indicate charging depending on the battery of the powerbank.
- If you are charging your Powerbank with a compatible Quick Charge 3.0, Power Delivery or PPS fast charger, the LED Display will show two green electric symbols on the top right beside the battery percentage.

Note: Computer USB port output is less than the wall adapter.

Charging Your Devices

- Please connect the device to the Powerbank using the USB-A/ Type C connector for charging.
 - In case the Powerbank doesn't start automatically single press the power button to begin charging.
 - If your device supports Quick Charge 3.0, Power Delivery or PPS fast charging while charging your devices, the LED Display will show two green electric symbols on the top right beside the battery percentage.
 - When pressed twice, the power button stops any device charging taking place.
- Note: If you are charging your device and Powerbank at the same time using the Pass-through charge-discharge feature, it will result in slower charging and discharging speed.

Charging norms & Precautionary Guidelines: -

- 1) Charger/Brick/Adapter : 5V/2A
 - 2) Cable/Wire : Standard Cable (35 strands @0.10mm diameter/ strand)
- Any other accessory can be paired up with the product as long as the specifications are as per above norms.

Product Specification

| | |
|----------------------------------|---|
| Capacity | 10000mAh 3.7V (37Wh) |
| Rated Capacity | 6750mAh 5.0V (TYP 2A) |
| Dimension | 8167 x 59.4 x 26mm |
| Battery Type | Li-ion polymer |
| Input | DC 5V/3A, 9V/2A, 12V/1.5A |
| Input Ports | 1x Type C (2-way) |
| Output Ports | 1x USB-A, 1x Type C (2-way) |
| Output (USB-A) | DC 5V/4.5A, 5V/3A, 9V/2A, 12V/1.5A |
| Output (USB-C) | DC 5V/3A, 9V/2.22A, 12V/1.67A, 3.3V-1W/2A (PPS) |
| Fully Charged by 9V 2.0A adaptor | 4 hrs 30 min ± 10 min |
| Fully Discharged by 18W load | 1hrs 45 min ± 10 min |
| Operating Environment | -10 to 55° Celsius |
| Overcurrent Protection | Protected (3.6±0.10)A |
| Over Charging Voltage Protection | 16±0.05 V |
| Short Circuit Protection | Protected |
| Body Temperature Cut Off | Yes (55-60° Celsius) |

Important User Instructions

- Please utilize our standard Type C charging cable to charge the device.
- It is recommended to charge the Powerbank fully before its first use.
- Do not leave the Powerbank inside the car lying unattended.
- The product should be safeguarded against any physical shock or vibration.
- Keep out of reach of children.
- If the Powerbank gets discharged completely, make sure to quickly put it into charge.
- Do not leave the battery on charge for over 24 hours.
- Charging current and voltage should not exceed the maximum specified amount.

Warning

- Do not drop, decompose, impact the device or repair it on your own.
- Do not put this product in water, exposed to fire or direct sunlight.
- Do not use the product around combustible gas. It may catch fire and/or cause burns.
- Do not disassemble or attempt to replace the Li-polymer battery under any circumstance, as it may damage the device permanently.

E- Waste Management

As per government rules, all E- wastes are to be managed by effective treatment under specialized methodologies prescribed by the Govt. of India. Do not dispose the product as unsorted municipal waste. The waste will be treated as per the norms set by the pollution control board. Please contact customer care for getting guidance on proper disposal of this product.

Back