

- PENDANTS: one
- MOUNTING: copper canopy 60mm (2.4") in diameter x 14mm (0.6") deep
- LAMPING: 1.8w LED or 20w xenon
- COPPER LENGTH: 500mm (19.5")
- MATERIALS: blown glass, flexible copper tubing, electrical components, copper hardware, brushed copper mounting plate
- WEIGHT: approximately 1.25kg (2.8lb)
- TRANSFORMERS: remote mounted. Transformers included

DESCRIPTION

The 'sc' designation in this variation on the 28 refers to it being surface-mounted with flexible copper tubing. The surface light has a 14mm (0.6") deep by 60mm (2.4") in diameter copper mounting plate designed to be mounted on walls as well as ceilings.

28 is an exploration of specificity in manufacturing. Instead of designing form itself, here the intent was to design a system of making that yields form. Individual 28 pendants result from a complex glass blowing technique whereby air pressure is intermittently introduced into and then removed from a glass matrix which is intermittently heated and then rapidly cooled. The result is a distorted spherical shape with a composed collection of imploded inner shapes, one of which acts as a shade for the light source.

The 28 copper series provides a different compositional reading that results from shaping the copper tubing during installation. Pendants can be angled in any direction to provide a range of sculptural forms. The copper will weather and tarnish, registering the passage of time in its patina.

Standard 28s are made with clear glass exterior spheres and milk white interior lamp holder cavities. 28s are possible with infinite versatility in colour compositions, sizes and shapes.

NOTES

- + Purchase replacement lamps online at www.bocci.ca/lamps
- + Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible
- + Transformers must be remote mounted

US Patent # D687,740
EU Patent # 001695834-001 to 004


Made in Vancouver, Canada

Vancouver
sales@bocci.ca
www.bocci.ca

Berlin
europe@bocci.ca
www.bocci.ca

approx 1.25kg (2.8lb)




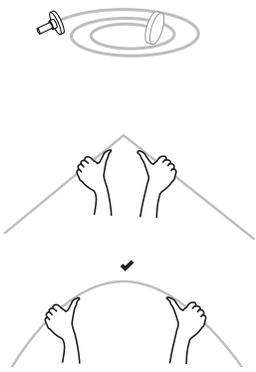

1

Very carefully uncoil the copper tube with both hands to avoid kinking.

Note: be very careful not to overbend the copper tube as it will leave a permanent kink that can not be removed.

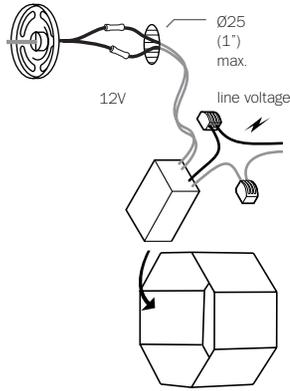

2


Mount transformer remotely. Drill a 25mm (1") diameter hole in ceiling material. Route output wiring from transformer to fixture location. Pull low voltage house wire through the hole

Connect transformers inside the canopy to line voltage.

Xenon (110V) or LED: connect the black wire to black and white wire to white wire.

Xenon (230V): connect black wire to brown wire and white wire to blue wire.

For the ground connection, connect the green wire with yellow stripe to the bare copper wire or green wire in the junction box.

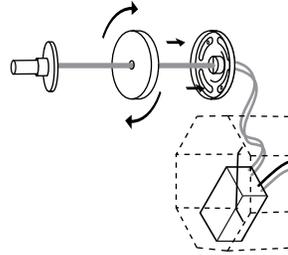

3

The client is responsible to ensure fasteners are attached to a robust structural substrate.


Affix mounting plate to surface with fasteners provided. Thread canopy back plate to mounting plate and tighten the set screw with the Allen key provided.



4

Compose the copper tubing according to the intended design aesthetic.


Note: be very careful not to overbend the copper tube as it will leave a permanent kink that can not be removed.

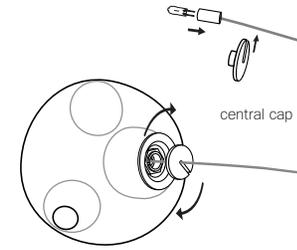

5

Plug the lamp into the socket.

Install 28 pendant by inserting the socket into the opening and then threading the copper cap into the pendant by hand. Do not over tighten.



6

Clean fingerprints from glass surfaces.

Turn fixture on.

For additional assistance, please contact Bocci:

Vancouver
sales@bocci.ca
www.bocci.ca

Berlin
europe@bocci.ca
www.bocci.ca

US Patent # D687,740
EU Patent # 001695834-001 to 004

Made in Vancouver, Canada

