

SLIM BAFFLE 6" DOWNLIGHT

High quality recessed lighting without a can. LED Slim 6" downlight is IC rated and simple to install. This Slim includes a low profile J-Box to fit in narrow ceilings (2" space). Secure with the spring loaded brackets. Suitable for soffit to double drywall ceilings. Provides a bright 850 lumens and a wide beam angle of 90°. Consumes only 13W yet is a 75W bulb equivalent.


MODELS

DL_SLBF6-14W-6K-#
DL_SLBF6-14W-4K-#
DL_SLBF6-14W-27K-#


DL_SLBF6-14W-5K-#
DL_SLBF6-14W-3K-#

LIGHT DISTRIBUTION ANGLE

SPECTRUM DISTRIBUTION

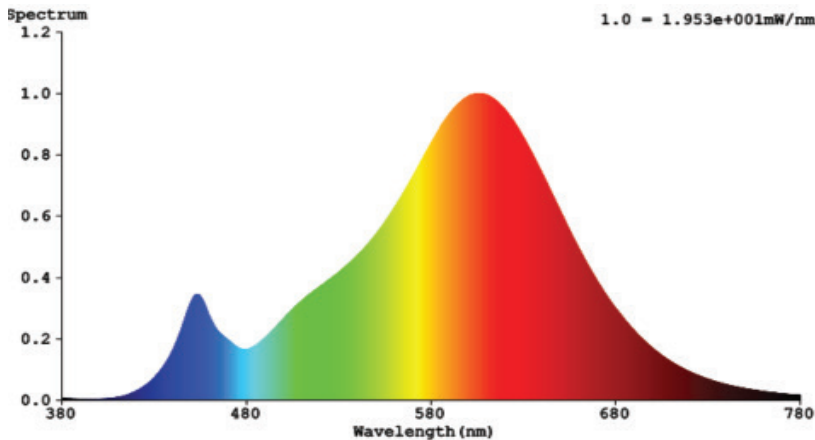


CIE1931 Chromaticity Diagram

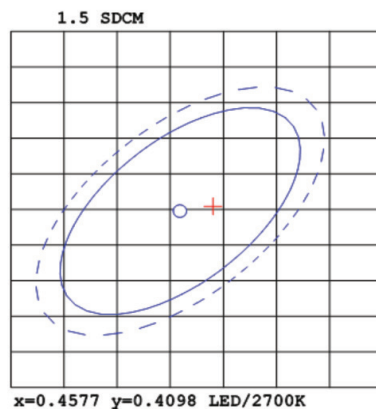

CERTIFICATIONS



*No Energy Star certification for 2200K, 5500K, and 6000K

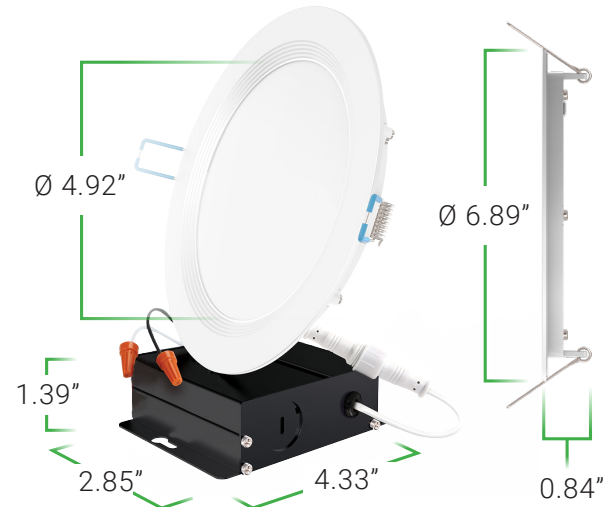

SPECIFICATIONS

Voltage	120V
Wattage	14W
Current	0.126A
Power Factor	0.9

LIGHTING PERFORMANCE

Lumens	850
Equivalency	100W
Color Temperature	2700K-6000K
Color Rendering Index (CRI)	80
Beam Angle	90°
Dimmable	Yes
Efficiency (lm/w)	60.7
Frequency	60Hz

ENVIRONMENT

Operating Temperature	4°F to 104°F
Usage	Indoor
IC Rated	Yes

CONSTRUCTION

Housing	Polycarbonate
Weight	0.57lbs

LIFESPAN

Average Life (Hours)	35,000+
Warranty	7 years