

SMOOTH 5/6" LED DOWNLIGHT


A 90° beam angle delivers a wide flood while the smooth trim on Sunco's damp rated Recessed LED 5/6" Light provides a reflective surface to maximize its beam spread. This dimmable downlight features an E26 adapter base and spring connectors to install in existing 5" or 6" cans. 75W bulb equivalent yet only consumes 13W.

MODELS


DL_SMDR56-13W-27K-# DL_SMDR56-13W-3K-#
 DL_SMDR56-13W-4K-# DL_SMDR56-13W-5K-#
 DL_SMDR56-13W-6K-#

LIGHT DISTRIBUTION ANGLE


SPECTRUM DISTRIBUTION

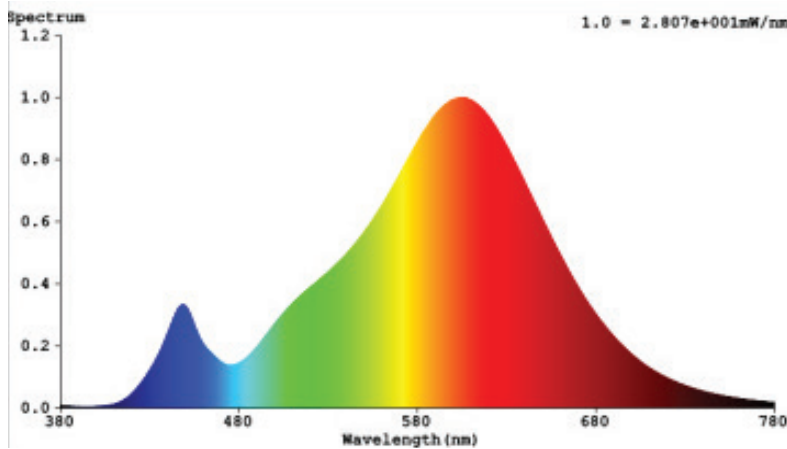

CIE1931 Chromaticity Diagram

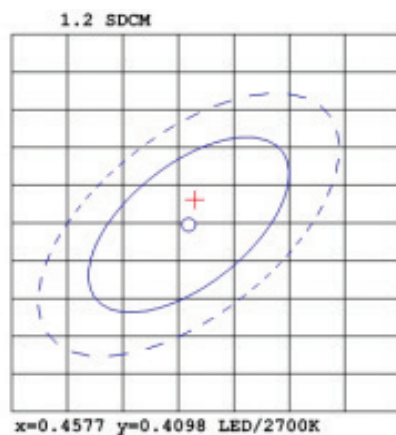

CERTIFICATIONS

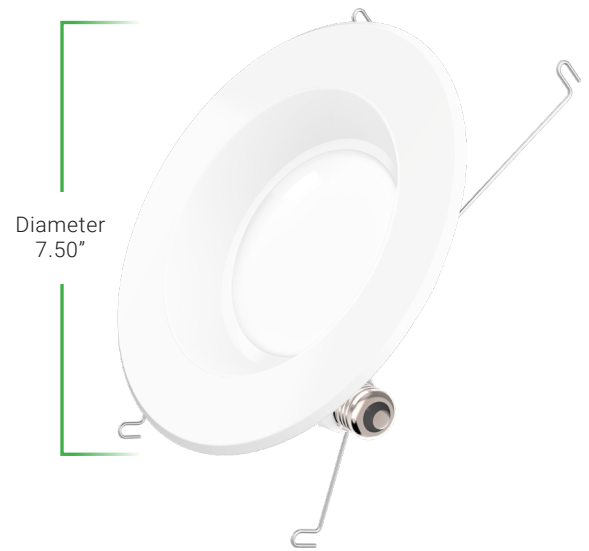

SPECIFICATIONS

Voltage	120V
Wattage	13W
Current	0.115A
Power Factor	0.9

LIGHTING PERFORMANCE

Lumens	965
Equivalency	75W
Color Temperature	2700K-6000K
Color Rendering Index (CRI)	80
Beam Angle	90°
Dimmable	Yes
Efficiency (lm/w)	60.0
Frequency	60Hz

ENVIRONMENT

Operating Temperature	4°F to 104°F
Suitable for Damp Locations Ingress	Yes

CONSTRUCTION

Housing	Polycarbonate
Weight	0.58lbs

LIFESPAN

Average Life (Hours)	35,000+
Warranty	7 years
Switching Time	>30,000