


T5 INTEGRATED TUBE

Install Guide and Manual

COMPONENTS

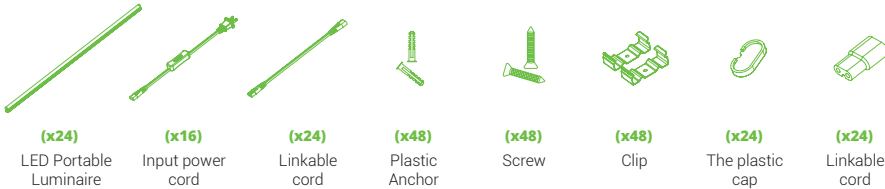

EASY INSTALLATION JUNCTION BOX INSTALLATION

Required Tools: Drill or Screwdriver, Tape Measure, Pencil.

Min. 3/8" thick

- Turn off circuit breaker that provides power to the light switch for the recessed lights.
- Mounting surface must be able to support the weight of the fixture.
 - Plaster board - #8 eye hook screw with plastic anchors, or expansion bolts (not included);
 - Plaster board thickness should be 3/8 inch.

35"

- Drill holes for the mounting brackets 35" apart, install plastic anchors.
 - Ensure the 2 plastic anchors are placed 35 inches apart and then place the clips and the screws in right place.

- Place mounting bracket over holes then screw into place.

Mounting Bracket Installation

Single Fixture Installation

Endcap

- Snap fixture into place.

Multiple Fixture Installation

Finished Run

- Use the connectors (short or long) to link multiple fixtures.
 - Link up to 12;
 - Ensure the last fixture in the run has an end cap.

- Plug in power cord to electrical outlet.
- Turn on circuit breaker and test the light.

WARNING

All electrical connections must be in accordance with local and National Electric Code (N.E.C.) standards. Consult a qualified electrician if you are unfamiliar with proper electrical wiring connections. Please review instructions carefully before proceeding.

WARNING: Risk of fire or electric shock. Do not alter, relocate or remove wiring during installation. This fixture complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: Not for use with dimmers. Do not install directly over a heat source.

SPECIFICATIONS

Voltage	120V
Wattage	20W
Suitable for Locations Ingress	Damp
Housing	Plastic
Weight	0.37lbs
Warranty	1 years