

2x4 LED SELECTABLE CEILING PANEL

Installation Manual



EASY INSTALLATION Recessed Mount

1. Turn off circuit breaker before installing.

2. Place Ceiling Panel face down on flat surface.

- Unscrew 2 driver covers and set aside screws.

3. Pop out knockout (choice of 5).

- **Optional:** If using dimmer, pop out 2nd knockout.

4. Connect conduit to each knockout.

- Feed wires through.

5. Connect supply wires to Ceiling Panel wires with included wire nuts:

- Black to Black (Live)
- White to White (Neutral)
- Green to Green (Ground)

OPTIONAL: To use dimming feature, connect pink and purple wires on Ceiling Panel to compatible dimmer (not included).

6. Replace driver covers.

- Tighten screws.

7. Set preferred color temperature using CCT on back of Ceiling Panel.

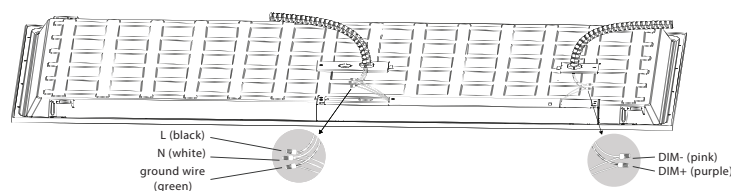
- 4000K
- 5000K
- 6000K

8. Bend 4 protective brackets located on back of Ceiling Panel up 90°.

9. Turn brackets 90°. Hook should face outside edge of Ceiling Panel.

10. Turn on circuit breaker and test light.

WIRING DIAGRAM



SPECIFICATIONS









| | |
|------------------|--------------|
| Voltage | 100-277V |
| Wattage | 50W |
| Moisture Rating | Damp |
| Housing Material | SPCC+PS Lens |
| Weight | 8.33 lbs |
| Warranty | 7 Years |
| Dimming Details | 0-10V |

2x4 LED SELECTABLE CEILING PANEL

Installation Manual



EASY INSTALLATION Suspension Mount

| | |
|---|--|
|  <ol style="list-style-type: none"> 1. Turn off circuit breaker before installing. 2. Place Ceiling Panel face down on flat surface. <ul style="list-style-type: none"> • Unscrew 2 driver covers and set aside screws. 3. Pop out 2 knockouts (choice of 5). |  <ol style="list-style-type: none"> 4. Connect conduit to each knockout. <ul style="list-style-type: none"> • Feed wires through. |
|  <ol style="list-style-type: none"> 5. Connect supply wires to Ceiling Panel wires with included wire nuts: <ul style="list-style-type: none"> • Black to Black (Live) • White to White (Neutral) • Green to Green (Ground) |  <p>OPTIONAL: To use dimming feature, connect pink and purple wires on Ceiling Panel to compatible dimmer (not included).</p> |
|  <ol style="list-style-type: none"> 6. Replace driver covers. <ul style="list-style-type: none"> • Tighten screws. 7. Set preferred color temperature using CCT on back of Ceiling Panel. <ul style="list-style-type: none"> • 4000K • 5000K • 6000K |  <ol style="list-style-type: none"> 8. Drill 4 holes into ceiling. 9. Place anchors into hole, insert wire rope, and screw. <ul style="list-style-type: none"> • Refer to suspension kit's (not included) install manual for complete details. |
|  <ol style="list-style-type: none"> 10. Adjust support rope/wire to ensure Ceiling Panel hangs horizontally. 11. Adjust light into ceiling and secure using protective brackets. |  <p>Turn Power ON</p> <ol style="list-style-type: none"> 12. Turn on circuit breaker and test light. |

WARNING

To reduce the risk of fire, electric shock, or physical injury:

- Turn off circuit breaker before installing this fixture.
- This product should be installed by a person familiar with the construction and operation of the product and hazards involved. Safety eyeglasses and gloves are recommended.
- Abide by related regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Check for shipping damage before installing. If the product is damaged, do not use it.
- Keep fixture away from corrosive substances.
- Clean fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Use safety precautions and abide by regional and local laws or regulations.
- This product is not compatible with 3rd party sensors.