

Cord Dimmer with error indication, overheat and short circuit protection.




**Read the technical data before installing this product.**

**Observe the general safety instructions.**

**Failure to follow the instructions may result in damage to the unit, fire or other hazards.**

**Use this product only in dry areas.**

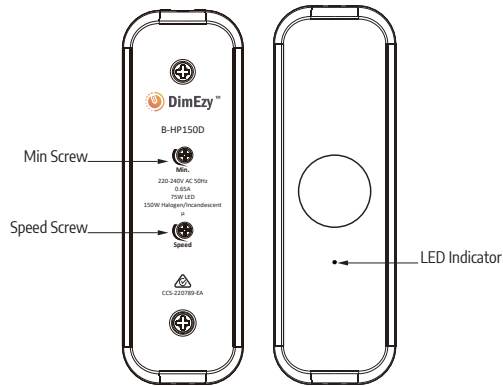

Voltage

220-240V- 50Hz

Load type

0-75W LED  
10-150W Halogen / Incandescent

Dimming method

R,C Trailing Edge

Dimming style

Rotary Button

Ambient temperature

Max. 35° C

Dimensions (Dimmer Body)

99.8 x 32.2 x 36.5 mm

Weight

59.3 g

### Set minimum brightness

Insert the screwdriver into the **MIN** screw and turn it to the left.

Keep the push button pressed until the minimum brightness is reached.

If the light becomes unstable (flashes), turn the screwdriver to the right until the blinking stops.

### LED indicator

**Green** - Normal operating

**Red** - Short circuit protection

Unplug, fix short circuit problem, after 30 seconds, plug in and turn on again.

**Yellow** - Over load/Over temperature protection

Turn off the dimmer, decrease load to under the maximum load. Turn on again when the yellow indicator goes out.

