


Initial Setup Epson WF-7210 Series (Modified) with Sublisplash EPN+ inks Adobe Photoshop

1. Inital ink fill / Initialization

After unpacking the printer remove the **blue** shipping protective elements and the **red** shipping protection from the ink tank. **Do not connect the printer to the power supply yet!**

Open the ink tank and **remove the coloured aeration plugs**. Store them in a safe place. They will be necessary should you need to transport or ship the printer at a later date!




The next step is to fill the empty ink tanks. When filling the tanks, it is essential to fill the correct ink colour in the corresponding colour tank! The colour order is from **left to right**:

K (Black), C (Cyan), M (Magenta), Y (Yellow)

The order of the colours is also visible when you lift the printer cover. There is a sticker above the ink tanks with the colour order.



To fill each tank, remove the **transparent filler plug** and fill the tank with **60ml Sublisplash EPN+** ink of the correct colour using the supplied syringe (with hollow needle attached). Please always use the same syringe for one colour! After filling the ink tank, close the fill hole with the transparent filler plug.

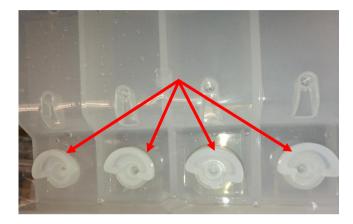



Close the ink tank cover and allow it to lock into place.

After checking once more that all shipping protection elements have been removed, the printer can be plugged in and turned on. The initialization routine will start **automatically**.



2. Installing Printer Software

Download the appropriate driver for your operating system (Win10 32bit or Win10 64bit) directly from the Epson Homepage and save it.

Link to driver version Win10 32bit:


https://download.epson-europe.com/pub/download/6286/epson628635eu.exe

Link to driver version Win10 64bit:

https://download.epson-europe.com/pub/download/6286/epson628634eu.exe

Start the setup by double clicking on the EXE file.

After a short time the following window appears:



If the printer is to be set up as the default printer, leave the option "**Set as default printer**" checked. Otherwise remove the check mark.

The "Automatically update software" check mark must be REMOVED!

Click on "OK" to continue with the setup.

Follow the instructions. Once the setup is complete, we recommend restarting your computer.



The Epson software automatically searches for updates within a specified period. As this can lead to problems, we turn it off as follows:



- 1. Click on the "UP Arrow" in the status bar.
- 2. Right click on the "Status Monitor" icon.

Right click on "Software Update Settings".




Click on the option "Never".


Confirm by clicking on "OK".

3. Configuring printer driver

3.1 To view print settings:

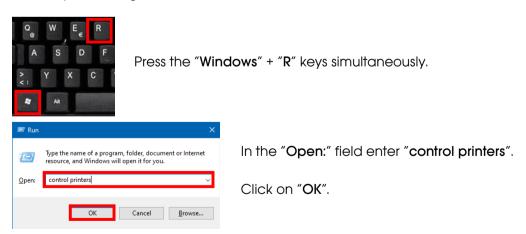







- 1. Right click on "EPSON WF-7210 Series".
- 2. Click on "Printing preferences".

3.2 Configure and save print settings:

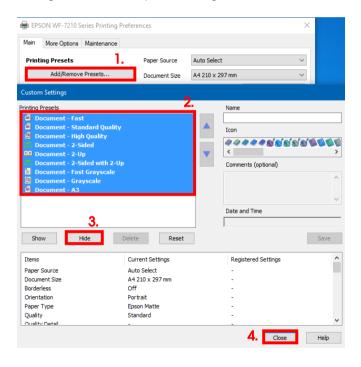

- 1. Click on "Add/Remove Presets...".
- 2. Select all entries. Click on the **first** entry, hold down the "**Shift**" key and click on the **last** entry.
- 3. Click on "Hide".
- 4. Click on "Close".



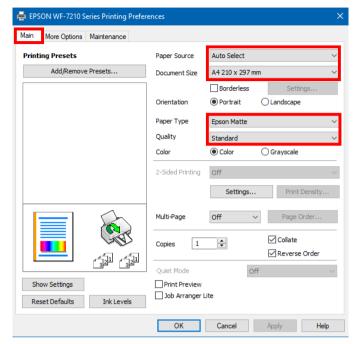


In the tab "Main", please set the following settings:

Paper Source: Auto Select
Document Size: A4 210 x 297 mm

Orientation: Portrait

Paper Type: Epson Matte
Quality: Standard
Color: Color




In the tab "More Options" set the following settings:

Color Correction: Custom

Check "High Speed". Check "Mirror Image".



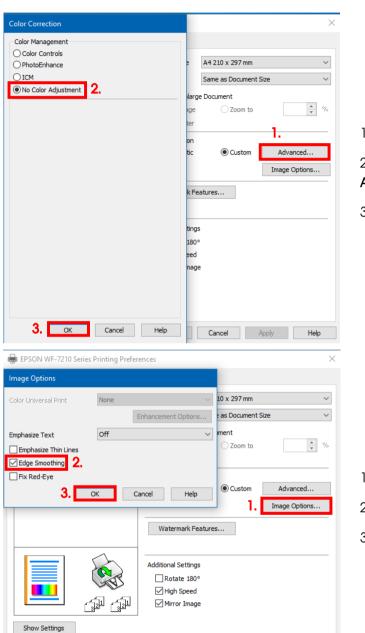


Reset Defaults


- 1. Click on "Advanced...".
- 2. Click on the option "No Color Adjustment".
- 3. Confirm by clicking on "OK".

- 1. Click on "Image Options...".
- 2. Check "Edge Smoothing".
- 3. Confirm by clicking on "OK".



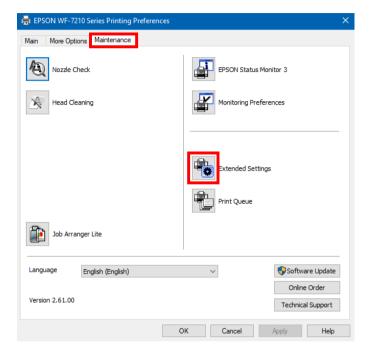


In the tab "Maintenance" click on the button "Extended Settings".

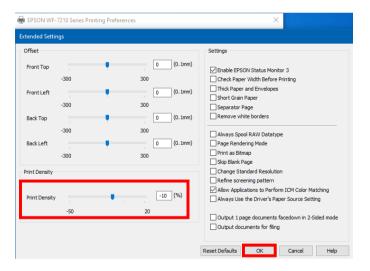

Set the value for "Print Density" to "-10".


Confirm your changes by clicking on "OK".



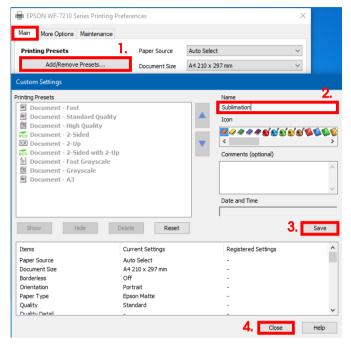

Click on the tab "Main".

- 1. Click on "Add/Remove Presets...".
- 2. Enter a name for your preferences.
- 3. Click on "**Save**" to save your preferences under the given name.
- 4. Click on "Close" to return to the "Main" screen.



Clicking on the name activates your preferences.

Click "OK" to close the window.




4. Install WIC Reset Utility and start up the printer

Download the WIC Reset Utility directly from the homepage and save it on your computer.

Link to the WIC Reset Utility:

http://www.2manuals.com/WIC/wicreset.exe


Start the setup by double clicking on the EXE file.



Click on the option "I accept the agreement".

Click on "Next >" to close the window.

Follow the setup instructions until you come to this window:




Make sure that "Launch WICReset" is checked.

Click on "Finish" to end setup and start the WIC Reset Utility.


The WIC Reset Utility will check if a newer version is available. If so, the new version will be installed and the WIC Reset Utility will be closed and restarted.



The following window appears right after starting WIC Reset Utility:

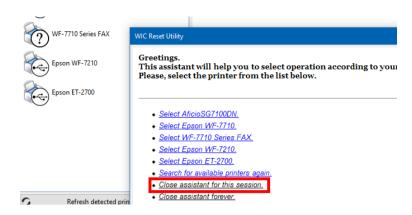

Click on "Close assistant for this session.".

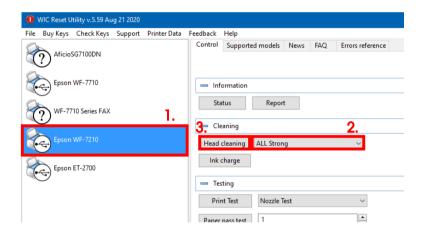


- 1. Click on "Epson WF-7210".
- 2. Select "ALL Strong" in the options.
- 3. Click on "Head cleaning". You have to repeat this step a total of 4 times!

Wait until each run is complete before starting the next one.

After the **fourth run** we now check whether the printer's ink system has been completely filled (and that the storage fluid has been removed from the system).




Open the printer cover and check the ink lines on the print head. If **all lines are filled** (as shown in the picture below) a first nozzle check can be conducted. If not, repeat the "**Head cleaning**" step (step 3 in the previous section) **2 more times.**

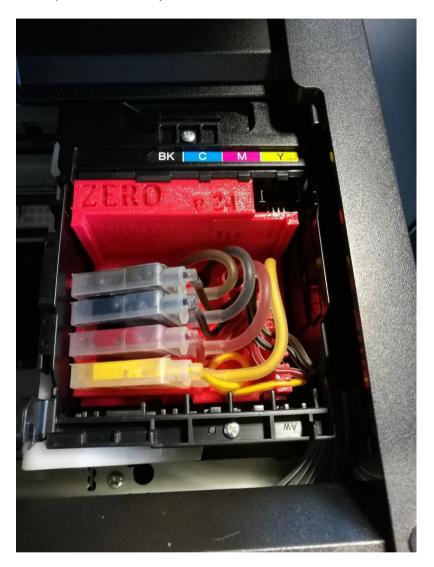

If after doing this the lines are still not correctly filled or empty, please contact us.




Place a few sheets of A4 paper in the paper tray (normal copy paper is sufficient).

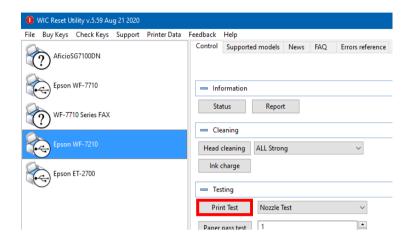

Click on "Print Test" to print a nozzle check.

If the nozzle check is not complete, you must now clean the print head.

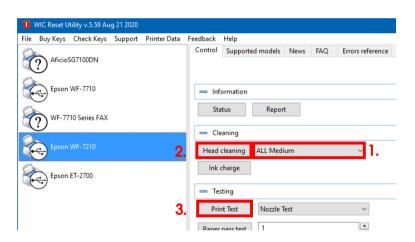

- 1. Select "ALL Medium" in the options.
- 2. Click on "Head cleaning".
- 3. Click on "**Print Test**" to print a nozzle check.

If the nozzle check is not correct, repeat steps 1-3 a maximum of 3 times. Allow the printer to sit for about an hour so that the ink can settle.


Afterwards, print a nozzle check (step 3) and repeat steps 1-3 if necessary.

The WIC Reset Utility can now be closed.



5. Download and install ICC color profile

Go to https://www.sublisplash.com/de/downloads/ and download the appropriate ICC color profile for your printer. ATTENTION: You have to select the ICC color profile for EPN+ inks!



- 1. Right click on the ICC color profile.
- 2. Click on "Install Profile" in the window.

The window closes and the ICC color profile is installed on your computer. No status window or confirmation message will be displayed.

Tip: Windows stores its ICC color profiles in the folder "C:\windows\system32\spool\drivers\color".




6. Creating Color Setting "Sublimation" in Adobe Photoshop



Start Photoshop.

Click on "Edit" in the menu bar.

Click on "Color Settings...".




Take the settings exactly as you see them in this screenshot.

Click on "Save" to save your settings. Select an obvious file name when saving (we recommend "Sublimation")!



7. Download a test file in Photoshop


If the file has a different working colour space, the window "Embedded Profile Mismatch" appears.



Select the option "Convert document's colors to the working space".

Confirm by clicking on "OK".

If the file has no working colour space, the window "Missing Profile" appears.




Select the option

"Assign working RGB: Adobe RGB (1998)".

Confirm by clicking on "OK".




Click in the menu bar on "File" and then in the drop-down menu on "Print" to call up the Photoshop print dialogue.

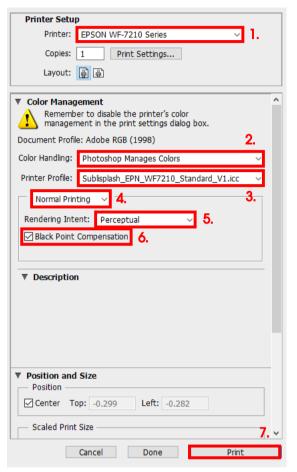


- 1. Select the "Epson WF-7210 Series" in the printer field.
- 2. Select "Color Handling:" "Photoshop Manages Colors".
- 3. Select our current ICC color profile under "Printer Profile".
- 4. Select "Normal Printing".
- 5. Under "Rendering Intent:" select "Perceptual".
- 6. Check "Black Point Compensation".
- 7. To print now, click "Print".

Practical tip: Before you print, we recommend that you check to ensure that the print preset currently set in the printer driver is correct.




To do this, click on "Print Settings..." in the Photoshop print dialogue.



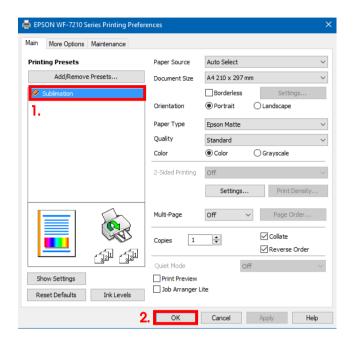

- Under "Printing Presets" select the setting "Sublimation" (shown in blue) by clicking on it.
- 2. Confirm your selection by clicking on "OK". The window closes.

Place a few sheets of **TexPrint-DT** (was previously called TexPrint-R) paper into the paper tray of the printer with the printed side facing up.



By clicking on "Print" you start the printout.

You have now completed the initial installation for your Epson WF-7210 (Modified) printer with **Sublisplash EPN+ inks** and the initial setup for Adobe Photoshop.

Should you need help in selecting or checking these settings, we have provided the instructions "Integrating Color Profile Epson WF7210 – Photoshop_EPN+_ EN" on our Sublisplash website in the section "Instructions for Epson printers".