

LED WALL PACK LIGHT - WPD SERIES

Introduction

- ◆ The WPD series is available in lumen packages from 4,650 to 9,765 lumens with a wide and even distribution. Since WPD occupies the same area as a typical metal halide glass wall pack, it can completely cover unsightly stains.
- ◆ A high-quality polycarbonate lens, which work with a high-efficiency light engine to provide superior illumination.
- ◆ Available with Photocell.

Features

Construction:

- ◆ Rugged die-casting aluminum housing with bronze powder coating for durability. Castings are sealed with integral gaskets to prevent the ingress of external contaminants. It has 4-6KV surge protection. Consult factory for Photocell surge ratings.

Electrical:

- ◆ The Input voltage is AC120-277V (50/60Hz). Electronic drivers ensure system power factor >90%. 0-10V dimming driver is standard.

Optics:

- ◆ The light engine configuration includes high-efficiency LEDs. Color temperature (CCT) option is 3000K/ 4000K/5000K selectable with a minimum CRI of 70.



Product Selectable:



WATTAGE SELECTABLE



CCT SELECTABLE

Finish:

- ◆ Standard color is dark bronze.

Compliances:

- ◆ cULus listed for wet locations, environment temperature ranging 113°F.
- ◆ DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.



Warranty:

- ◆ 5-years limited warranty.



Parameters

Model #	Wattage	Lumens @50K	Input Voltage	CRI	CCT
XS- WPD-63W-304050W-30405 OK-UV-P	(63/45/30)W	Max. 9765m	AC120-277V	>70	30/40/50K selectable

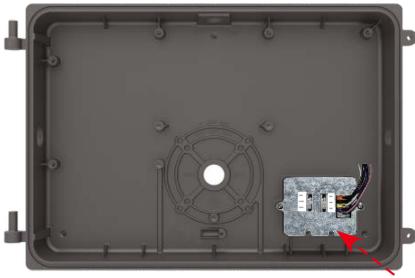


Wattage & CCT Selectable - Dial in the desired lumens and CCT via the dial located in the fixture.




The geometry covers the footprint of a typical HID wall pack, covering any unsightly stains.

Dimension

unit:inch/mm

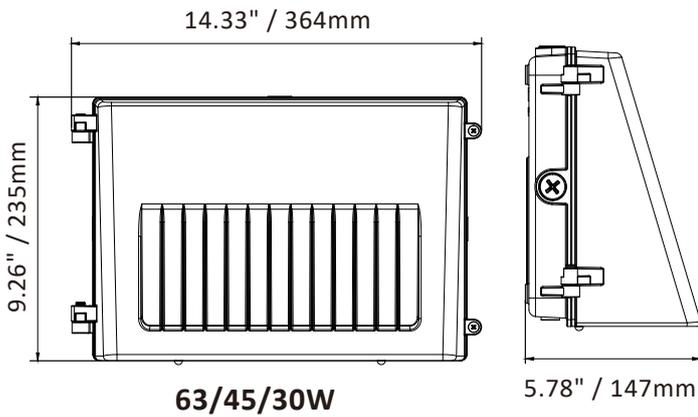

Photometrics

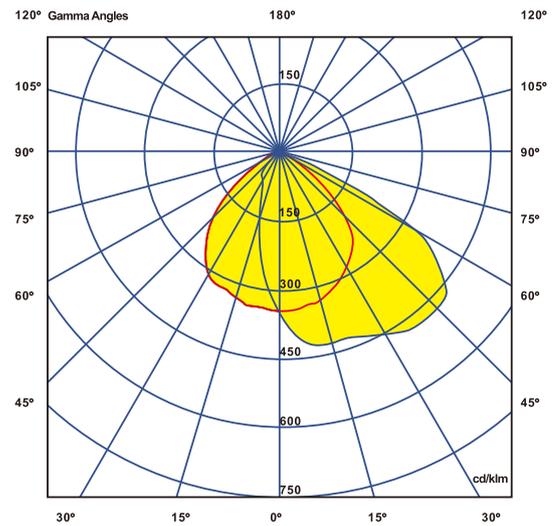

Electrical Data

Voltage (V)	Model XS-WPD-63W-304050K-UV-P Max. Current (A)
120V	0.53
208V	0.30
240V	0.26
277V	0.23