
CM<sub>3</sub>

#### **CM3 Series**




#### Symbol



#### Product feature

- 1. The external force required by changing the direction of the series of CM3B, CM3V, CM3L and CM3R is provided by external mechanism, which can be used for position test or limit switch.
- 2. The series of CM3PF, CM3PM, CM3PMS, CM3PMX, CM3PL, CM3PP, CM3HS, CM3HD and CM3Y are operated manually, owning control joints with several structure forms and suitable for application under different conditions.
- $3. \ Shut-off structure \ has \ good \ tightness \ and \ is \ sensitive \ in \ direction \ changing \ and \ lubricant \ is \ not$
- 4. Multi-mounting makes it convenient to install and apply.
- 5. The control joints of series of CM3L, CM3V, CM3R and CM3Y are made of metal which has long service life and more reliable and steady performance.
- 6. CM3PMS. CM3PMX Series have metallic guard, it can protect the push cup, to avoid misact due to outside force touching the push cup. So they can be used more reliably.

### Ordering code





#### Specification


Model	CM3□-05	CM3□-06	CM3□-08
Operating		External control	
Fluid	Air (to be	filtered by 40 µm filte	r element)
Pressure range	0~1.0	MPa(0~114psi)(0~10	).0bar)
Proof pressure	1.	.5MPa(215psi)(15.0ba	ar)
Temperature		-20~70 °C	
Valve type①	3 port 2 position		
Orifice size	2.0mm <sup>2</sup>	2.5 mm <sup>2</sup>	15.0mm <sup>2</sup>
Lubrication	0.11	0.14	0.84
Port size②	M5x0.8	1/8"	1/4"
Material body	Aluminum alloy		

1) HD series are 5/3 way. 2) PT thread, NPT thread and G thread are available.

#### Flow chart








# AITTAL


#### CM3 Series


CM<sub>3</sub>


#### Installation and operation


1. Mounting way: by body, by panel I, by panel II, latching type, mushroom type. Please refer to the following picture:











Disassembly: Remove the push cap, then remove the guard.

Assembly: Install the guard, then to tighten the push cap.

Disassembly: Untighten the guard first, then remove the push cap with the guard.


Assembly: Install the guard, then to tighten the push cap

- The control set is made of engineering plastic which only allows manual operation and switching valves through metal impact is forbidden.
- 3. The series of CM3B, CM3L, CM3V, CM3R, CM3PM, CM3PMS, CM3PMX, CM3PF, CM3PP get the function of automatic restoration. The hand valves of CM3Y, CM3HS, CM3HD, CM3PL are in type of manual restoration. CM3PL will be restored by turning the revolve button after being pressed into orientation.
- 4. Pay attention to the reversing stroke. The reversing stroke can not surpass its stroke stipulated in stroke control table when the direction-change of the valve is forced by any external forces, otherwise it will cause the damage of the valve.


Туре	Spool	Button (Roller\	Туре	Spool	Button (Roller\
	stroke	Handle) stroke		stroke	Handle) stroke
CM3B05(06)	1.5~3.0	-	CM3B08	2.4~4.0	-
CM3R05(06)	1.5~2.5	3.0~4.8	CM3R08	2.4~3.2	6.8~9.0
CM3L05(06)	1.5~2.3	3.0~4.8	CM3L08	2.4~3.2	7.2~9.7
CM3V05(06)	1.5~3.0	2.7~4.2	CM3V08	2.4~4.0	2.6~4.2
CM3Y05(06)	1.5~2.5	3.0~4.8	CM3Y08	2.4~3.2	6.8~9.0
CM3PL05(06)	1.5~2.5	4.0~5.0	CM3PL08	2.4~3.5	4.0~5.0
CM3PP05(06)	1.5~3.0	4.0~5.5	CM3PP08	2.4~4.0	4.0~5.5
CM3PF05(06)	1.5~3.0	4.0~5.5	CM3PF08	2.4~4.0	4.0~5.5
CM3HS05(06)	1.5~3.0	4.0~5.5	CM3HS08	2.4~4.0	4.0~5.5
CM3HD05(06)	1.5~3.0	4.0~5.5	CM3HD08	2.4~4.0	4.0~5.5
CM3PM05(06)	1.5~3.0	4.0~5.5	CM3PM08	2.4~4.0	4.0~5.5
CM3PMS05(06)	1.5~3.0	4.0~5.5	CM3PMX08	2.4~4.0	4.0~5.5
CM3PMX05(06)	1.5~3.0	4.0~5.5	CM3PMX08	2.4~4.0	4.0~5.5


- 5. The CM3L can only switch the valve in single direction(impact from left to right). The impact from the other direction (from right to left) is invalid.
- 6. Control joint combination can be ordered individually. Please refer to external specification.


#### Inner structure

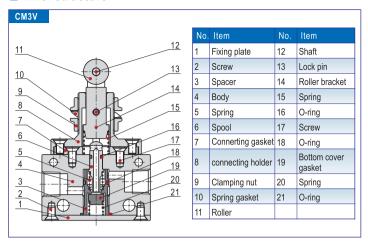

#### Dimension (Basic type)

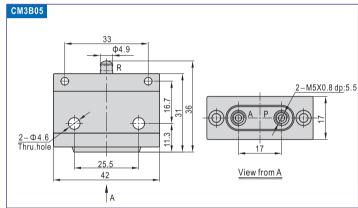

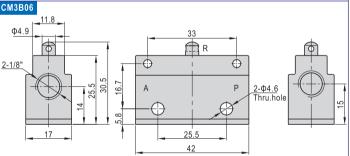


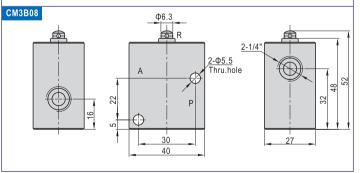


# AITTAL

#### CM3 Series

#### Control set dimension




#### CM3L06-P1




Note: CM3L06 control joint, which used in CM3L05 and CM3L06, can not be ordered individually. It should be matched with basic type.






Ordering code	CM3R08-P1
Туре	CM3R08 roller type control set
Applicable products	CM3R08




Ordering code	CM3L08-P1
Туре	CM3L08 roller type control set
Applicable products	CM3L08



# Type CM3V05-P1 Type CM3V vertical type control set Applicable products CM3V05 CM3V06 CM3V08

#### CM3Y06-P1



Ordering code	CM3Y06-P1
Туре	CM3Y lever type control set
Applicable products	CM3Y05 CM3Y06 CM3Y08

#### CM3PL06-P2





Ordering	CM3PL06-P2
Туре	CM3PL latching type control set(red
Applicable products	CM3PL05 CM3PL06 CM3PL08

#### CM3PP06-P□






Ordering code	CM3PP06-P1
Туре	CM3PP protruding type control set(green)
Applicable products	CM3PP05 CM3PP06 CM3PP08
Ordering code	CM3PP06-P2
Туре	CM3PP protruding type control set(red)
Applicable products	CM3PP05 CM3PP06 CM3PP08
Ordering code	CM3PP06-P3
Туре	CM3PP protruding type control set(black)
Applicable products	CM3PP05 CM3PP06 CM3PP08
Ordering code	CM3PP06-P4
Туре	CM3PP protruding type control set(yellow)
Applicable products	CM3PP05 CM3PP06 CM3PP08

#### CM3PF06-P□





Ordering code	CM3PF06-P1
Туре	CM3PF flat type control set(green)
Applicable products	CM3PF05 CM3PF06 CM3PF08
Ordering code	CM3PF06-P2
Туре	CM3PF flat type control set(red)
Applicable products	CM3PF05 CM3PF06 CM3PF08
Ordering code	CM3PF06-P3
Туре	CM3PF flat type control set(black)
Applicable products	CM3PF05 CM3PF06 CM3PF08
Ordering code	CM3PF06-P4
Туре	CM3PF flat type control set(yellow)
Applicable products	CM3PF05 CM3PF06 CM3PF08




CM3

## **CM3 Series**

CM3PM06-P□











Ordering code	CM3PM06-P1
Туре	CM3PM mushroom type control set(green)
Applicable products	CM3PM05 CM3PM06 CM3PM08
Ordering code	CM3PM06-P2
Туре	CM3PM mushroom type control set(red)
Applicable products	CM3PM05 CM3PM06 CM3PM08
Ordering code	CM3PM06-P3
Туре	CM3PM mushroom type control set(black)
Applicable products	CM3PM05 CM3PM06 CM3PM08
Ordering code	CM3PM06-P4
Туре	CM3PM mushroom type control set(yellow)
Applicable products	CM3PM05 CM3PM06 CM3PM08

#### CM3HS06-P




Ordering code	CM3HS06-P1
Туре	CM3HS selector type control set(green)
Applicable products	CM3HS05 CM3HS06 CM3HS08
Ordering code	CM3HS06-P2
Туре	CM3HS selector type control set(red)
Applicable products	CM3HS05 CM3HS06 CM3HS08
Ordering code	CM3HS06-P3
Туре	CM3HS selector type control set(black)
Applicable products	CM3HS05 CM3HS06 CM3HS08
Ordering code	CM3HS06-P4
Туре	CM3HS selector type control set(yellow)
Applicable products	CM3HS05 CM3HS06 CM3HS08

#### CM3PMX06-P



Ordering code	CM3PMX06-P1
Туре	CM3PMX big mushroom type control set(green with guard)
Applicable products	CM3PMX05 CM3PMX06 CM3PMX08
Ordering code	CM3PMX06-P2
Туре	CM3PMX big mushroom type control set(red with guard)
Applicable products	CM3PMX05 CM3PMX06 CM3PMX08
Ordering code	CM3PMX06-P3
Туре	CM3PMX big mushroom type control set(black with guard)
Applicable products	CM3PMX05 CM3PMX06 CM3PMX08
Ordering code	CM3PMX06-P4
Туре	CM3PMX big mushroom type control set(yellow with guard)
Applicable products	CM3PMX05 CM3PMX06 CM3PMX08






Ordering code	CM3PMS06-P1
Туре	CM3PMS mushroom type control set(green with guard)
Applicable products	CM3PMS05 CM3PMS06 CM3PMS08
Ordering code	CM3PMS06-P2
Туре	CM3PMS mushroom type control set(red with guard)
Applicable products	CM3PMS05 CM3PMS06 CM3PMS08
Ordering code	CM3PMS06-P3
Туре	CM3PMS mushroom type control set(black with guard)
Applicable products	CM3PMS05 CM3PMS06 CM3PMS08
Ordering code	CM3PMS06-P4
Туре	CM3PMS mushroom type control set(yellow with guard)
Applicable products	CM3PMS05 CM3PMS06 CM3PMS08


## CM3HD06-P


























Ordering code	CM3HD06-P1
Туре	CM3HD double-selector type control set(green)
Applicable products	CM3HD05 CM3HD06 CM3HD08
Ordering code	CM3HD06-P2
Туре	CM3HD double-selector type control set(red)
Applicable products	CM3HD05 CM3HD06 CM3HD08
Ordering code	CM3HD06-P3
Туре	CM3HD double-selector type control set(black)
Applicable products	CM3HD05 CM3HD06 CM3HD08
Ordering code	CM3HD06-P4
Туре	CM3HD double-selector type control set(yellow)
Applicable products	CM3HD05 CM3HD06 CM3HD08

Note: CM3HD control joint can be ordered individually, but should be matched with the body of CM3HD.