LEDone®

LED Multi Watt Multi CCT Mini Wall Pack

Light Family Series

FEATURES

- Default Wattage: 25W
- Default CCT: 5,000K
- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- Semi cut-off
- Photocell included
- 50,000 hours lifetime



Heavy die-cast aluminum housing with polyester powder-coated finish. Integral secondary heat sink to optimize thermal transfer and maximize performance of the LEDs. Frosted lens.

OPTICAL SYSTEM:

Philips Lumileds 3030 LED chips. High quality tempered glass optics. 125° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -4°F to 122°F

INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.

CONTROLS & DIMMING:

Photocell included. Continuous dimming to 10% or below







Bronze

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking LotsShopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships









Quick Mount Back Plate

WATTAGE	BUG RATING			
8W/10W/15W/25W	B1-U3-G2			

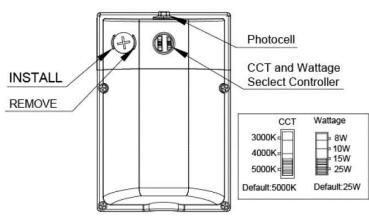

Bronze Color



White Color

LED Multi Watt Multi CCT Mini Wall Pack Light Family Series

2,057.4LM

3,429LM



30W - 50W HID

30W - 50W HID

LO-LOC-MWP-MW-25-MCCT-BR									
WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES	
8W	3000K / 4000K / 5000K	1,097.28LM	137.16lm/W	120-277V	71	0.923	12%	30W – 50W HID	
10W	3000K / 4000K / 5000K	1,371.6LM	140lm/W	120-277V	71.3	0.985	11.8%	30W – 50W HID	
15W	3000K / 4000K / 5000K	2,057.4LM	140lm/W	120-277V	71.3	0.985	11.8%	30W – 50W HID	
25W	3000K / 4000K / 5000K	3,429LM	140lm/W	120-277V	71.3	0.985	11.8%	30W – 50W HID	
LO-LOC-MWP-MW-25-MCCT-WH									
WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES	
8W	3000K / 4000K / 5000K	1,097.28LM	137.16lm/W	120-277V	71	0.923	12%	30W – 50W HID	
10W	3000K / 4000K / 5000K	1,371.6LM	140lm/W	120-277V	71.3	0.985	11.8%	30W – 50W HID	

120-277V

120-277V

71.3

71.3

0.985

0.985

11.8%

11.8%

140lm/W

140lm/W


MEASUREMENTS


3000K / 4000K / 5000K


3000K / 4000K / 5000K

15W

25W







Bronze Color White Color