

LED Linear Vapor Tight Light

INSTRUCTION MANUAL

Read this instruction carefully before installation. Keep it for further reference. Make electrical and grounded connections in accordance with the national electrical code and any applicable code. Always turn off the power supply before installation. This product must be installed in accordance with the applicable installation code by a qualified electrician who is familiar with the construction and operation of the product and the hazards involved.


Size	Model	Power	Working Current	Input Voltage	CCT	Viewing Angle	Ra	PF	Warranty
4FT	GIE-VT-4FT-40W-L-H	30/35/40W	0.4A	AC100-277V	3500K 4000K 5000K 6000K	120°	>80	>0.9	5 Years

WARNING:


- ⚠ Risk of or electric shock. Fixture installation requires knowledge of luminaires electrical systems. If not qualified, DO NOT attempt installation. Contact a qualified electrician.
- ⚠ Risk of fire or electric shock. Suitable for wet locations. Always turn off the power supply before installation. Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
- ⚠ DO NOT install fixture on unstable, loose or easily breakable surface. DO NOT exert force on the surface of the fixture.

Surface Mounted Installation


1. Fix the buckles in parallel by screws with distance matching the slots on each side of strip light.

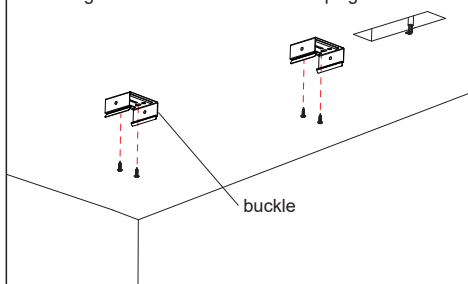


2. Connect the female connector to the mains or other means.

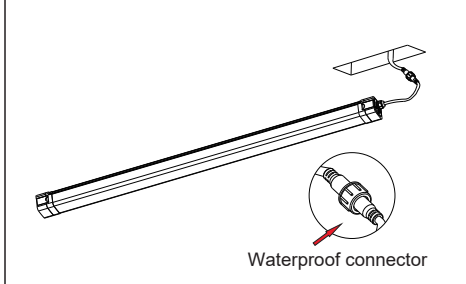

3. Open the blocking head. Then adjust the dip switch.

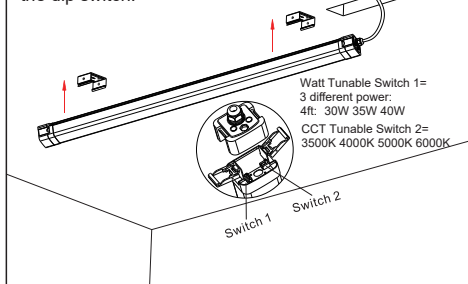


4. Installation completed. Stuck the lamp with a buckle, and fix it with buckle screw.

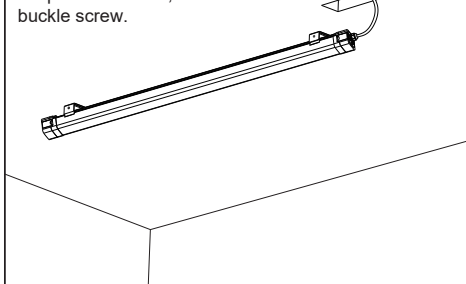


Connection Instruction


1. Open the end cap by pulling the fastener.

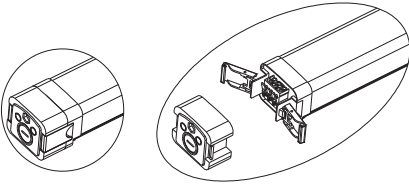


2. Waterproof end cap with connector.



3. Put the AC cable into the waterproof end cap of another Tri-proof light, After wiring, Close the end cap and twist tight the waterproof connector.

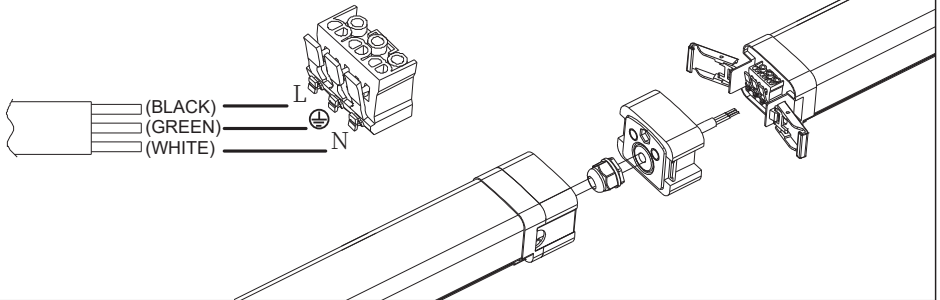

4. Tri-proof light in connection.

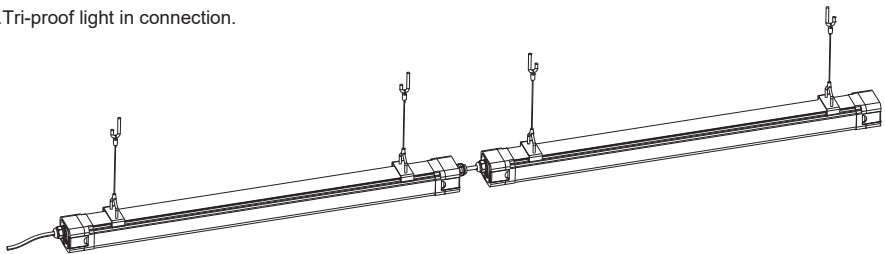

The Installation must be carried out by a qualified electrician.