



Item#: **92409**
LED DIRECT WIRE LINEAR T5/T6
 INTERNAL DRIVER/LINE VOLTAGE
 (UL TYPE B) LAMPS

FEATURES


Our LED tube lamp provides exceptional LED lighting with reduced energy and maintenance costs. The linear LED does not use a fluorescent ballast to work; instead they feature a built-in universal line voltage driver, making it a top of the line replacement for standard fluorescent lamps.

SINGLE ENDED DIRECT WIRE

- No ballast required, lamp runs off main
- Replacement for F28T5 linear fluorescent
- Exceptional efficacy
- ETL Sanitation Listed (NSF-2)

**Non-shunted sockets required, see install instructions for further details. Not for use with emergency fixtures.*

LIGHT DISTRIBUTION CURVE

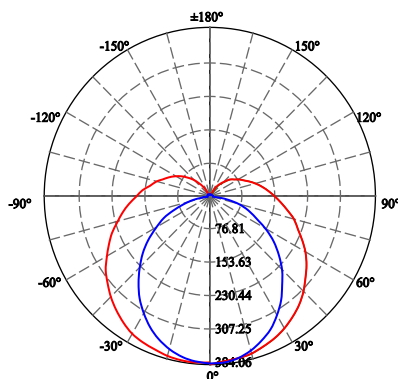

ELECTRICAL

Wattage	13W
Voltage	120-277V
Current	115mA
Power Factor	0.9
Total Harmonic Distortion (THD)	20

LIGHTING PERFORMANCE

Lumens	1800
Lumens Per Watt (LPW)	138
Color Temperature (CCT)	5000K
Color Rendering (CRI)	82
R9 (Red Value)	3
R13 (Skin Tones)	83
Beam Angle	180°
Light Distribution	Type IV, Very Short
BUG Rating (Backlight, Uplight, and Glare)	B1 - U3 - G1

ENVIRONMENT

Operating Temperature	-4° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP20
Suitable Fixture Type	Enclosed

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Seoul 3528
------------------	------------

CONSTRUCTION

Housing	Glass / Metal End Caps
Lens	Frosted
Base / Power Supply	G5 - Mini Bi Pin

QUALIFICATIONS




Visit www.designlights.org/search to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: **92409**
LED DIRECT WIRE LINEAR T5/T6

DIMENSIONS (Inches)

Length (MOL)	45.8"
Width/Diameter (MOD)	0.8"
Net Weight (Lbs)	0.4



PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	25	10811768027577	48.2" x 5.2" x 5.2"	12.8
Individual Box	1	811768027570	--	0.5
Country of Origin	China			
HS Tariff	8539.50.0050			