# WALL PACK (MWP10)









#### **DESCRIPTION**

Slim wall pack is available in 27W for a variety of applications including building perimeter, entrances, stairways and security lighting. MWP10 series of luminaries provides a low-profile architectural style with the power of bright, energy efficient LEDs. It has a rugged aluminum construction with multi-mount capabilities. 0° to +90° tilt adjustments. For a building that has a modern or futuristic look.

### SPECIFICATION FEATURES

#### Construction

- Sealed die-casting profile for outdoor applications.
- Suitable for applications requiring 3G testing prescribed by ANSI C136.31.

#### Optics

- 4000K and 5000K CCT available for standard version.
- . 3,600 Lumens.
- Tempered UV coated flat lens provide outstanding performance, uniformity, and glare control.

#### **Electrical**

- Standard drivers feature electronic universal voltage (120-277 50/60Hz) operation.
- Greater than 0.9 power factor, less than 20% harmonic distortion, and is suitable for operation in -40°F to 104°F ambient environments.

#### Lifespan

 Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### Certifications

- UL cUL wet location listed.
- DesignLights Consortium  $\ ^{\mathtt{m}}$  Qualified.

**Note:** DesignLights Consortium™ Qualified and classified for DLC Standard (all lumen packages), refer to www.designlights.org for details.


#### Warranty


Five-year warranty.




#### **DIMENSIONS**


unit: mm/inch







Net Weight: 27W: 3.351lb

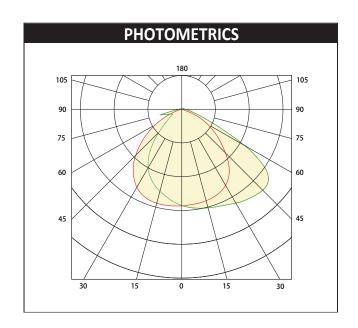



## **PERFORMANCE DATA**

SYSTEM WATTS	VOLTAGE	CRI	LUMENS (4000K)	LPW	LUMENS (5000K)	LPW
27W	120-277VAC	70	3600lm	133 lm/w	3600lm	133 lm/w

# **ELECTRICAL DATA**

Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	430	27	120	0.23
		27	208	0.13
		27	240	0.11
		27	277	0.10