

Meter Centres


600Y/347V Meter Centre

Accessories

Sub-service Circuit Breakers^①

- Assembled circuit breaker without lugs (lugs not required for this application)
- Non-interchangeable trip only
- Breaker mounting hardware provided with meter stack
- Additional information on breaker available in section 5 page 5-24

Amperage Rating	Number of Poles	Max. interrupting rating for 600Y/347V	
		22 kA	25 kA
		Catalogue Number	Catalogue Number
70A	3	FXD63B070	HFXD63B070
80A	3	FXD63B080	HFXD63B080
90A	3	FXD63B090	HFXD63B090
100A	3	FXD63B100	HFXD63B100
110A	3	FXD63B110	HFXD63B110
125A	3	FXD63B125	HFXD63B125
150A	3	FXD63B150	HFXD63B150
175A	3	FXD63B175	HFXD63B175
200A	3	FXD63B200	HFXD63B200

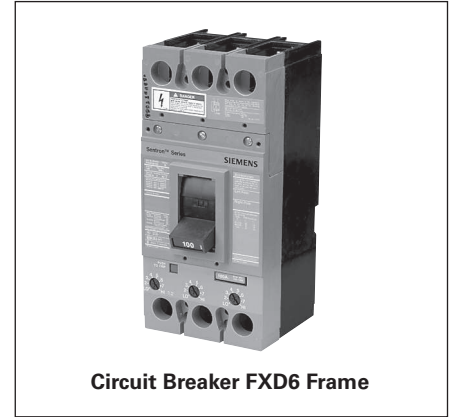

Circuit Breaker FXD6 Frame

2
METER
CENTRES

Standard Tap Boxes

- "IN" lugs included
- Suitable for left and right hand side entry (standard configuration is left hand side)

Main service	Amperage Rating (Amp)	Catalogue Number	Cable lug size per phase - suitable for Al and Cu cables	Overall Dimensions - Inches (mm)			Weight - lbs (kg)
				H	W	D	
600Y/347V 3Ø4W	600	MLTB3-6006	(4) 1/0 @ 750MCM Cu/Al	25 ^{1/8} (638)	27 ^{1/4} (692)	13 ^{15/16} (354)	68 (30.8)
	1200	MLTB3-12006	(4) 1/0 @ 750MCM Cu/Al	25 ^{1/8} (638)	27 ^{1/4} (692)	13 ^{15/16} (354)	70 (31.8)

Feed Through Tap Boxes

- "IN" and "OUT" lugs included
- Feed Through tap boxes are suitable for left and right hand side entry

Main service	Amperage Rating (Amp)	Catalogue Number	Cable lug size per phase - suitable for Al. And Cu cables	Overall Dimensions - Inches (mm)			Weight - lbs (kg)
				H	W	D	
600Y/347V 3Ø4W	600	MLTB3-600FT6	(4) 250 @ 750 MCM Cu/Al or (8) 3/0 @ 250 MCM Cu/AL	25 ^{1/8} (638)	27 ^{1/4} (692)	13 ^{15/16} (354)	74 (33.6)
	1200	MLTB3-1200FT6	(8) 1/0 @ 750 MCM Cu/Al	50 ^{5/8} (1285)	27 ^{1/4} (692)	13 ^{15/16} (354)	145 (65.8)



MLTB3-6006



MLTB3-600FT6

① Breaker mounting hardware kit included with 600V meter stack.