



Item#: **24775**  
**LED 48" VAPOR TIGHT - 3 LAMP**  
**LED READY FIXTURE**

**FEATURES**

- Diffusing lens for uniform light.
- Gasket formed to housing provides a seamless seal and protects lamps from dust and humidity.
- Die formed galvanized steel mounting brackets.
- Stainless steel clips
- 18 AWG 3 Conductor (10A /-40°F ~ 194°F/Dia .305")

**MOUNTING**

Surface or suspended mounting.

**APPLICATION**

Ideal for commercial and industrial environments; tunnels, stairwells, parking garages, cold storage, and airports. *Not designed for use in car washes, truck wash bays, or where exposed to harsh chemicals.*

**ELECTRICAL**

Lamps Type (Not included)	T8
Number of Lamps	3
Voltage	120-277V

**ENVIRONMENT**

Operating Temperature	-4° ~ 104°F
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP65

**LIFESPAN**

Warranty (Years)	<b>2</b>
------------------	----------

**CONSTRUCTIONS**



Housing	Polycarbonate
Lens	Vandal Resistant / PC
Sockets	Non-Shunted
Base / Power Supply	Hard Wired
Clips	Stainless Steel
Finish	White

**CERTIFICATIONS**



*Operating temperature may vary depending on the lamps used. • Specifications are subject to change without notice.*

PERFORMANCE DATA

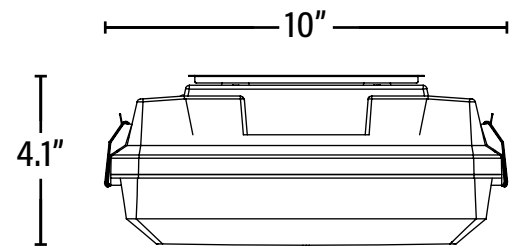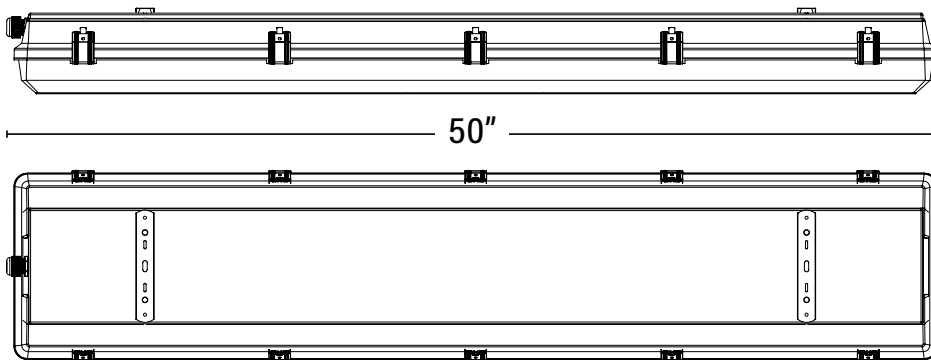

**DIMENSIONS** (Inches)

Length	50"
Width	10"
Height	4.1"
Weight (Lbs)	--

Item#: **24775**  
**LED 48" VAPOR TIGHT - 3 LAMP**

<b>PACKAGING</b>		<b>UPC</b>	<b>DIMENSIONS (LxWxH)</b>	<b>GROSS WEIGHT (Lbs)</b>
Master Carton	1	811768025170	50.8" x 10.4" x 3.3"	12.6
Country of Origin	China			
HS Tariff	9405.10.6020			

**ADDITIONAL INFORMATION:**

- Pairs with Direct Wire Single-End or Double-End UL Type B Lamps. Single-end pre-wired fixtures can also be wired double-end by the end-user if needed. Follow specific lamp installation wiring instructions for correct wiring.