


LED Vapor Tight Light - VTL SERIES

Introduction


- ◆ The VTL series vapor tight luminaire features a slim and modern design, making them ideal for low bay requirements in any location. It's protected against moisture, steam and dust to handle the harshest weather.
- ◆ This vapor tight fixture offers selectable wattage and color temperature, making it easy for distributors to stock and increase flexibility for project changes.
It can be surface mounted to the ceiling or wall, or suspended depending on the application.
- ◆ Sensor and emergency battery backups are optional.



Product Selectable:



WATTAGE SELECTABLE



CCT SELECTABLE

Features

Construction:

- ◆ Rugged and durable construction with plastic housing.

Electrical:

- ◆ 0-10V dimmable driver, which can dim from 100% down to off.
- ◆ The Input voltage is AC120-277V.

Optics:

- ◆ LED chips support CCT Selectable with CRI>80.
- ◆ Sealed optic available in 120° beam angle.

Finish:

- ◆ Housing is permanent pearl gray color.

Mounting:

- ◆ Support surface mounting.

Compliances:

- ◆ cULus listed for wet locations, environment temperature from -40°F to 113°F.
- ◆ DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Warranty:



- ◆ 5-years limited warranty.



Specification

Model	Wattage	Lumen @50K @130lm/w	CCT	Lens	Input Voltage
XS-VTL-50W-304050K-LV	(50/40/30) W	Max. 6500lm	30/40/50K selectable	120°	AC120-277V 50/60Hz

Dimension & Weight

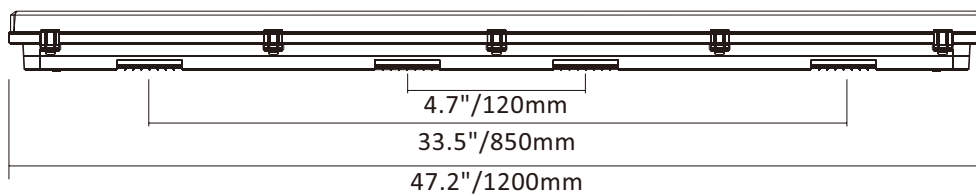

Electrical Data

Voltage (V)	Mode XS-VTL-50W-304050K-LV Current (A)
120V	0.42
208V	0.24
240V	0.21
277V	0.18