

LED LINEAR FIXTURE(MLF02)




Applications:

Suitable for commercial, retail and institutional applications including gymnasiums, factories and warehouses.

Features

- Standard with 4ft and can be extended by row connector and occlusion block.
- Universal voltage of 120-277V.
- 1-10V dimming available for dimming control.
- Surface mounting
- Exceed 50,000 hrs projected life span.
- Operating temperature is -40°F to 104°F.
- UL/Cul listed and DLC qualified.

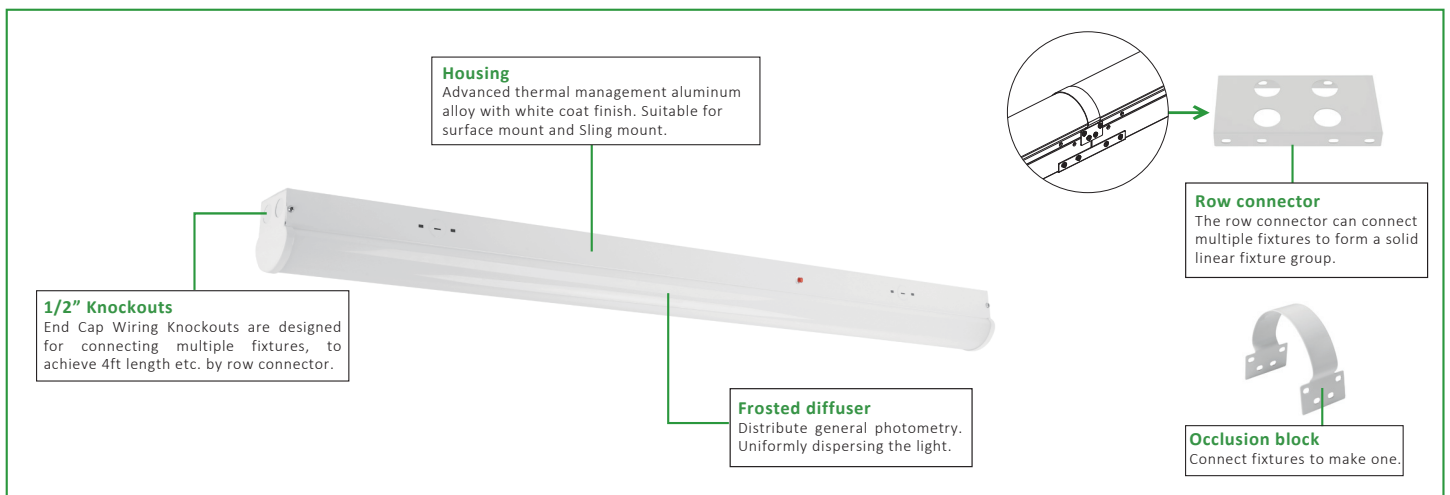

PERFORMANCE DATA


SYSTEM WATTS	SIZE	LENS	VOLTAGE	3000K(CRI80)		4000K(CRI80)		5000K(CRI80)	
				LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
23W	4 FT	Frosted	120-277VAC	2900lm	126lm/W	3000lm	130lm/W	3050lm	133lm/W

ELECTRICAL DATA

Size	Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
4 FT	1	530	23	120	0.19
			23	208	0.11
			23	240	0.10
			23	277	0.08

PHOTOMETRICS

General

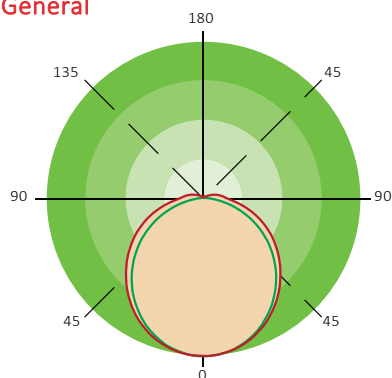

DIMENSION

unit: inch/mm

Weight

4F45W: 5.88LBS

4'

