

# LED LINEAR FIXTURE(MLF02)




## Applications:

Suitable for commercial, retail and institutional applications including gymnasiums, factories and warehouses.

## Features

- Standard with 4ft and can be extended by row connector and occlusion block.
- Universal voltage of 120-277V.
- 1-10V dimming available for dimming control.
- Surface mounting
- Exceed 50,000 hrs projected life span.
- Operating temperature is -40°F to 104°F.
- UL/Cul listed and DLC qualified.

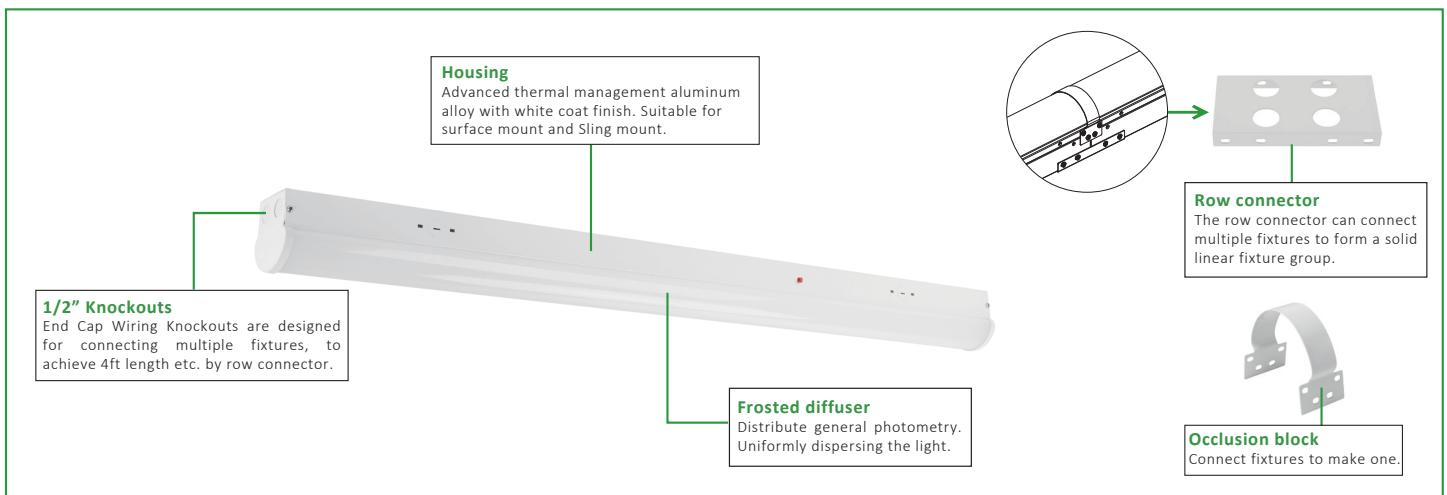

## PERFORMANCE DATA

SYSTEM WATTS	SIZE	LENS	VOLTAGE	3000K(CRI80)		4000K(CRI80)		5000K(CRI80)	
				LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
45W	4 FT	Frosted	120-277VAC	5850lm	130lm/W	6000lm	133lm/W	6050lm	134lm/W

## ELECTRICAL DATA


Size	Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
4 FT	1	1120	45	120	0.38
			45	208	0.22
			45	240	0.19
			45	277	0.16

## ENERGY SAVING REPLACEMENT

Size	Power	Replacing
4ft	45	T5HOx2

## PHOTOMETRICS

General

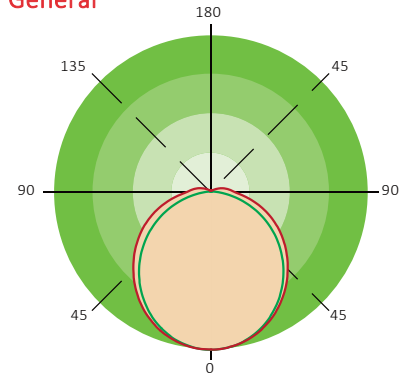

## DIMENSION

unit: inch/mm

Weight

4F45W: 5.88LBS

4'

