
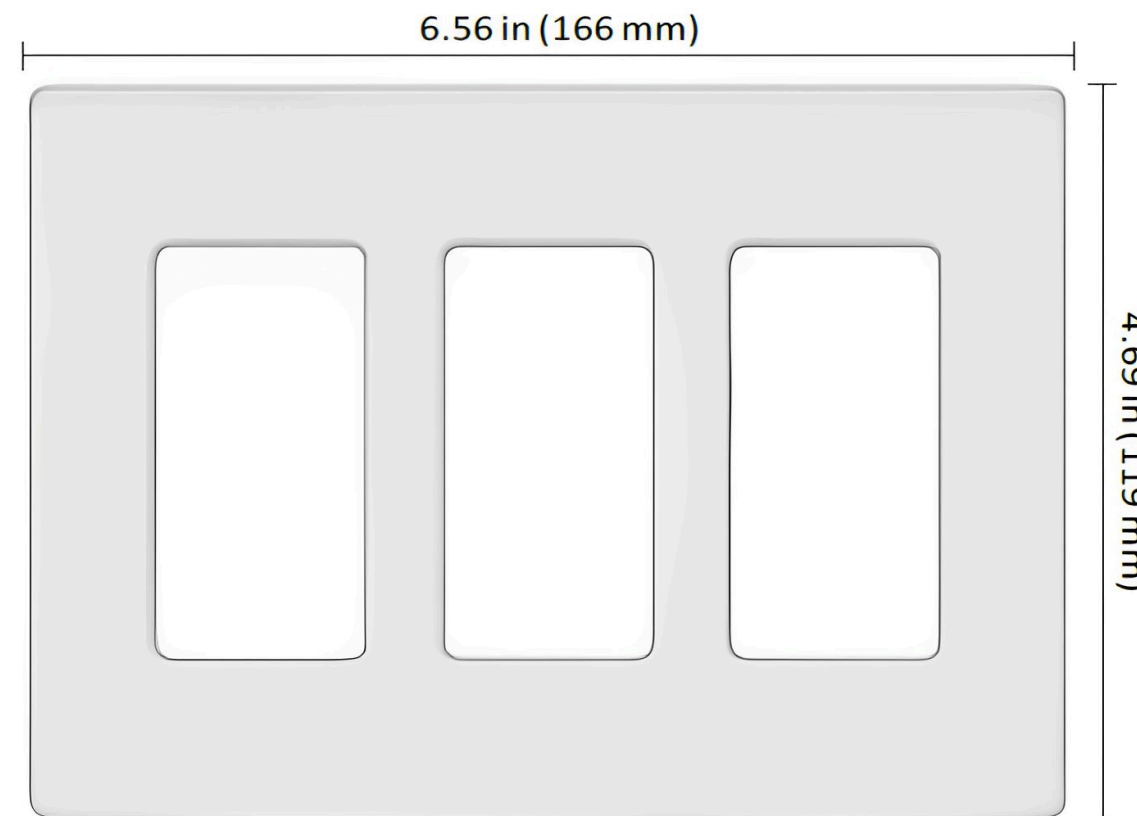


Shown actual size: Maestro dimmers and 1-gang, 2-gang, and 3-gang Claro wallplates in White (WH).

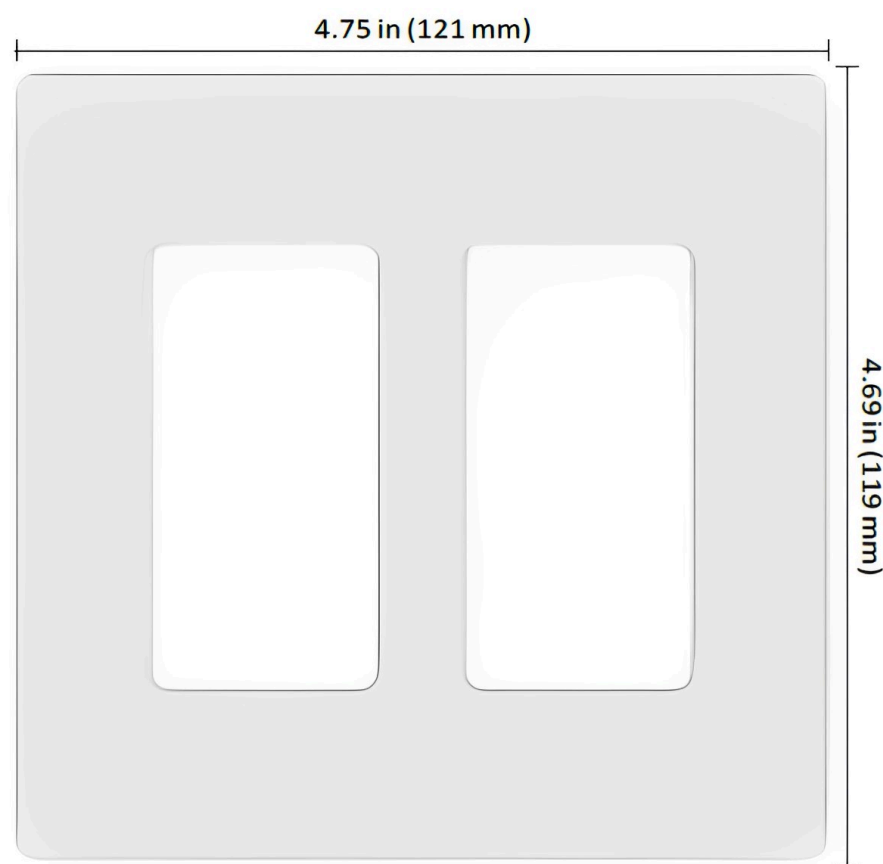


Product Family Features

- Can be used in conjunction with the following dimmer(s), switch(es), sensor(s), and accessories: Caséta Wireless, Diva, Luméa, Maestro, Pico wireless, Skylark, Skylark Contour, Sunnata, Vive Maestro Wireless controls, and Vive accessories
- All Lutron wallplates are screwless, seamless, and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in Designer style opening
- Blank inserts available for Gloss (DV-BI-) and Satin Colors (SC-BI-)

Ganging and Derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing
- May require derating (i.e., reduction of dimmer capacity due to fin removal)

Wallplates for Caséta Wireless, Diva, Luméa, Maestro, Maestro Wireless, Pico wireless, Skylark, Skylark Contour, Sunnata, Vive Maestro Wireless controls, and Vive accessories

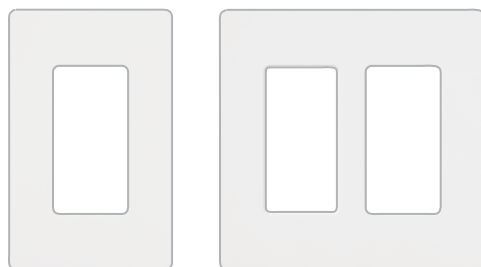

1-gang ^{*,**}	CW-1- XX ¹
W: 2.94 in (75 mm)	SC-1- XX ²
2-gang ^{*,**}	CW-2- XX ¹
W: 4.75 in (121 mm)	SC-2- XX ²
3-gang ^{*,**}	CW-3- XX ¹
W: 6.56 in (167 mm)	SC-3- XX ²
4-gang ^{*,**}	CW-4- XX ¹
W: 8.37 in (213 mm)	SC-4- XX ²
5-gang [*]	CW-5- XX ¹
W: 10.18 in (259 mm)	SC-5- XX ²
6-gang [*]	CW-6- XX ¹
W: 12 in (305 mm)	SC-6- XX ²

Important Note

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox. For more information consult Lutron Application Note #213, Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box, at lutron.com/applicationnotes.

*Stainless Steel metal wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

XX¹: Gloss and metal color codes
XX²: Available in Snow (SW), Midnight (MN), Taupe (TP), Biscuit (BI), Signal Red (SR), and Mist (MI)
XX³: Gloss color codes


Cable Jacks



- F-style, 75-Ohm coaxial cable
- Wallplate sold separately

Single cable jack	CA-CJ- XX ³
	SC-CJ- XX ²

Telephone Jacks



- 6-conductor telephone jack, RJ11
- Wallplate sold separately

Single telephone jack	CA-PJ- XX ³
	SC-PJ- XX ²

6-port Frame



- Shipped with six blanks in matching colors
- Connectors sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted

Field customizable 6-port frame

6-port frame	CA-6PF- XX ¹
	SC-6PF- XX ⁴

Connectors for 6-port Frame



Telephone/network jacks

8-conductor, RJ45 category 5e	CON-1P-C5E- XX ³
8-conductor, RJ45 category 6	CON-1P-C6- XX ³

Fiber jacks



MT-RJ feed through	CON-1F-MTRJ-WH
SC simplex	CON-1F-SC-WH
LC non-flush mount	CON-1F-LC-WH
ST-style	CON-1F-ST-WH



Cable jack

F-style, 75-Ohm coaxial cable	CON-1C- XX ³
-------------------------------	--------------------------------




BNC jack

BNC connector, 50-Ohm	CON-1B-WH
-----------------------	-----------

Connectors only for use with 6-port frame.

XX¹: Gloss color codes
XX²: Satin color codes
XX³: Available in White (WH) and Black (BL)
XX⁴: Available in Snow (SW), Midnight (MN), Taupe (TP), Biscuit (BI), Signal Red (SR), and Mist (MI)
 Wallplates not included. Order separately.

Receptacles



- Tamper-resistant receptacles include tamper-resistant shutter mechanism (shutters are white)

Receptacles

15A 125V	CAR-15- XX ¹
	SCR-15- XX ²
20A 125V	SCR-20- XX ²

Tamper-resistant receptacles

15A 125V	CARS-15-TR- XX ¹
	SCRS-15-TR- XX ²
20A 125V	SCRS-20-TR- XX ²

USB Receptacles



- Includes two USB ports
- Ports are rated for a minimum of 10,000 insertions and removals

Tamper-resistant USB receptacles

15A 125V	CAR-15-UBTR- XX ¹
	SCR-15-UBTR- XX ²