
LED HIGH BAY MHB09







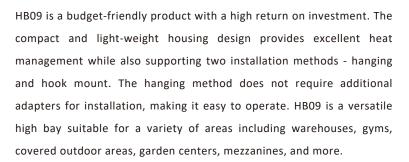

60W/80W



100W/120W

SPECIFICATION

Construction

- Casting thermally conducts LED heat to optimize performance and long life.
- With corrosion-resistant powder coating that provides protection and architectural appearance while adapting well to the environment.

Optics

- Color Temperature are available in standard 3000K, 4000K, 5000K (80 CRI) configurations.
- Anti-UV prismatic translucent lens is designed to shape the light uniformity and controls the glare light.

Electrical

- Universal input voltage of 120V
- PF >90%, THD <20%.
- Operating Temperature Range: -40F 104F.

Mounting

- Hook Mount.
- Conduit Pendant Mount.

Warranty

• Three-year warranty.

Certifications


• UL cUL wet location listed.

Note

 Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 77°F(±41°F) specifications subject to change without notice.

155W

PHOTOMETRICS

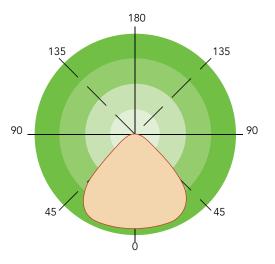


PERFORMANCE DATA

SYSTEM WATTS	PHOTOMETRY	3000K (80CRI)		4000K (80CRI)		5000K (80CRI)	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
60W	High Bay	6300lm	105 lm/W	6400lm	107 lm/W	6400lm	107 lm/W
80W	High Bay	8400lm	105 lm/W	8500lm	106 lm/W	8500lm	106 lm/W
100W	High Bay	10500lm	105 lm/W	11000lm	110 lm/W	11000lm	110 lm/W
120W	High Bay	12600lm	105 lm/W	13000lm	108 lm/W	13000lm	108 lm/W
155W	High Bay	16300lm	105 lm/W	17400lm	112 lm/W	17400lm	112 lm/W


DIMENSION









60W/80W





100/120W





155W

MOUNTING



Hook Mount



Conduit Pendant Mount* *Not included