



Item#: **19055**
LED 2X2 CENTER BASKET
 2X2 LUMINARIES FOR AMBIENT LIGHTING
 OF INTERIOR COMMERCIAL SPACES

FEATURES

- Indirect lighting reduces shadows and glare
- Center basket provides soft ambient light
- Compatible with today's popular ceiling system
- Use 30% less energy than a linear fluorescent fixture
- Smooth edges for easy handling
- Diffusing lens gives soft even lights

MOUNTING

- Recessed ceiling mount
- Exposed T-grid ceiling

APPLICATION

Ideal for offices, retail, commercial buildings and work areas.

ELECTRICAL

Wattage	30W
Voltage	120-277V
Current	0.25A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

LIGHTING PERFORMANCE

Lumens	3780
Lumens Per Watt (LPW)	126
Color Temperature (CCT)	4000K
Color Rendering (CRI)	82
R9 (Red Value)	7
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U1 - G1
Dimmable Lighting Control	<i>Dimmable</i> 1 - 10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Seoul 3528
Driver	SIF30-I0650

CONSTRUCTION


Housing	24 Gauge Steel
Lens	Acrylic (PMMA)
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS



- Published lumens on LED products are approximate and may vary slightly.
- Specifications are subject to change without notice.

Item#: **19055**
LED 2X2 CENTER BASKET

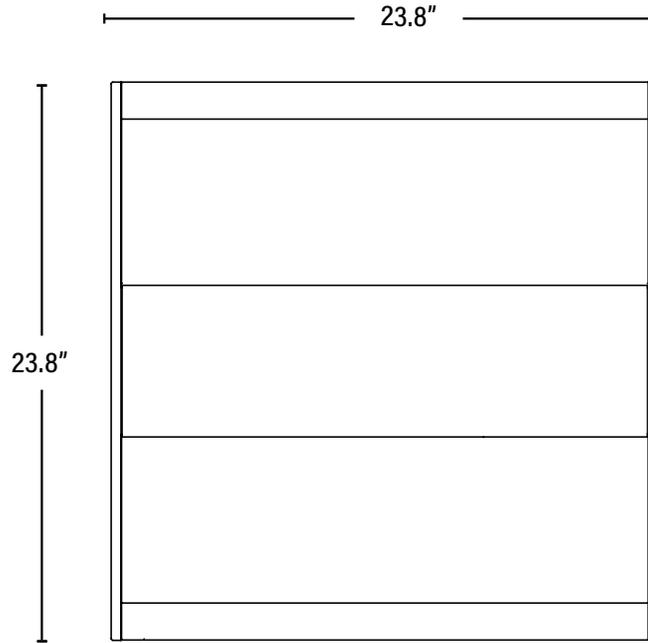

DIMENSIONS (Inches)

Length	23.8"
Width	23.8"
Height	2.1"
Net Weight (Lbs)	6.8

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	2	10811768028918	24.2" x 24" x 4.8"	--
Item	1	811768028911	N/A	N/A
Country of Origin	China			
HS Tariff	9405.10.6020			