



Item#: **05655**  
**LED 2X4 - 18 CELL PARABOLIC**  
**LED READY FIXTURE**

**FEATURES**

- High efficiency with excellent glare control
- Use 30% less energy than a traditional fluorescent fixture
- Die formed and rigidly fabricated
- Mechanical light trap prevents light leaks
- Door frame; concealed 24 gauge frame with integral hinges, and a spring steel latch
- Four corner tie points for safety wire support; when required
- LED ready with non-shunted sockets
- Pre-wired at both ends
- Works with both Single-End and Double-End Direct Wire lamps
- Compatible with traditional ceiling grids

**APPLICATION**

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

**ELECTRICAL**

Lamp Type (not included)	T8
Number of Lamps	3
Voltage	120-277V

**ENVIRONMENT**

Operating Temperature	-4° ~ 122°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP40

**LIFESPAN**

Warranty (Years)	<b>2</b>
------------------	----------


**CONSTRUCTION**

Housing	24 Gauge Steel
Base / Power Supply	Hard Wired
Parabolic Louver	Anodized Aluminum
Finish	High Gloss Baked White Enamel

**QUALIFICATIONS**



*Operating temperature may vary depending on lamps used. • Specifications are subject to change without notice.*

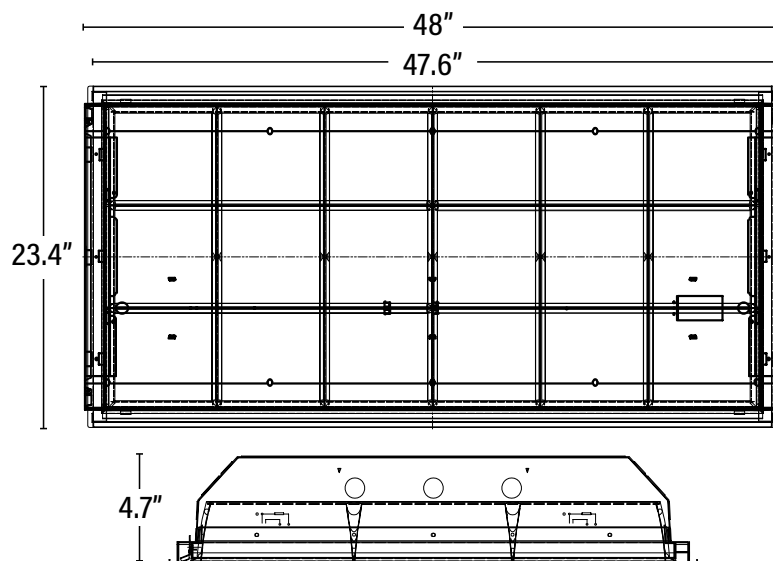

Item#: **05655**  
**LED 2X4 - 18 CELL PARABOLIC**

**DIMENSIONS** (Inches)

Length	48"
Width	23.4"
Height	4.7"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

<b>PACKAGING</b>		<b>UPC</b>	<b>DIMENSIONS</b> (LxWxH)	<b>GROSS WEIGHT</b> (Lbs)
Master Carton	1	--	49.6" x 24.2" 5.2"	17.6
Country of Origin	China			
HS Tariff	9405.10.6020			

**ADDITIONAL INFORMATION:**

- Pairs with Direct Wire Single-End or Double-End UL Type B Lamps. Follow specific lamp installation wiring instructions for correct wiring.