

2ft LED Selectable Vapor Tight

The 2ft LED Selectable Vapor Tight light fixture is designed to withstand industrial environments. This vapor tight light is suitable for wet locations and can be installed via surface mount. The fixture also provides instant bright light with no buzzing or flickering.


MODELS

VT2_25SW-GR-3550K



LIGHT DISTRIBUTION ANGLE

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

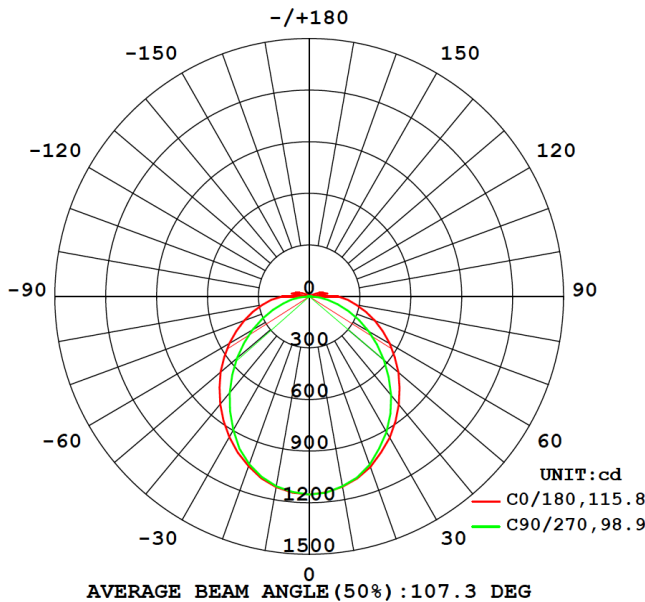

SPECIFICATIONS

Voltage	120-277V
Wattage	15W,20W,25W
Power Factor	>0.9

LIGHTING PERFORMANCE

Lumens	1950LM, 2600LM, 3250LM
Selectable CCT	3500K,4000K,5000K
CRI	80+
Beam Angle	110°
Dimmable	YES
Efficacy	130lm/w

ENVIRONMENT

Operating Temperature	40°F-122°F
Moisture Rating	Wet Rated

CONSTRUCTION

Housing Material	Polycarbonate
Weight	14.18lbs

LIFETIME

Average Lifetime	50000hrs
Warranty	7 Years

CERTIFICATIONS



2ft LED Selectable Vapor Tight

The 2ft LED Selectable Vapor Tight light fixture is designed to withstand industrial environments. This vapor tight light is suitable for wet locations and can be installed via surface mount. The fixture also provides instant bright light with no buzzing or flickering.

BRAND	MODEL
LUTRON	DVSTV
LUTRON	NTSTV-DV
LUTRON	DVTV
LEVITON	AWSMT-7DW
LEVITON	DD710-BDZ
LEVITON	DS710-10Z
LEGRAND	WS4FBL3PTC
LEGRAND	RH4FBL3PTC

We highly recommend using a ELV (electronic low voltage) dimmer compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

*May experience “pop-on” behavior, in which lights cannot be turned on immediately to their minimum level. To resolve this issue, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as needed.