

# LED Vapor Tight Light - VTW SERIES

## Introduction

- ◆ The VTW series vapor tight luminaire feature a slim and modern design. It has best-in-class performance at up to 150lm/w output. They feature a smooth dust-proof surface with a watertight seal that can withstand high-pressure washdowns.
- ◆ It is also NSF certified for use in food processing and food safety environments. Applications include poultry processing, food & beverage processing, commercial kitchens, and manufacturing facilities.
- ◆ The VTW Series can be surface mounted to the ceiling or wall.



## Features

### Construction:

- ◆ Rugged and durable construction with plastic housing.

### Electrical:

- ◆ 0-10V dimmable driver, which can dim from 100% down to off.
- ◆ The Input voltage is AC120-277V.

### Optics:

- ◆ LED chips support 5000K with CRI>80.
- ◆ Sealed optic available in 120° beam angle.

### Finish:

- ◆ Housing is permanent pearl gray color.

### Mounting:

- ◆ Support surface mounting.

### Compliances:

- ◆ NSF certified for food processing.
- ◆ cULus listed for wet locations, environment temperature from -40°F to 113°F .

### Warranty:

- ◆ 5-years limited warranty.





## Specification

Length	Wattage	Lumen @50K @150lm/w	CCT	Lens	Input Voltage
XS-VTW165W-50KUV	165W	24750lm	5000K	120°	AC120-277V 50/60Hz

## Dimensions & Weight

**165W**

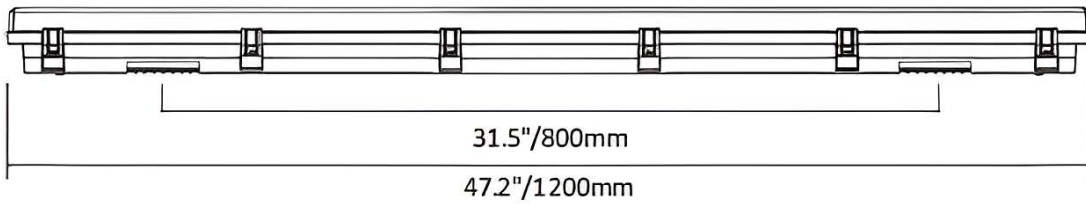

## Electrical Data

Voltage (V)	Model XS-VTW165W-50KUV Current (A)
120V	1.38
208V	0.79
240V	0.69
277V	0.60