
# 3/5/7w Tri Colour Track Light Installation Instructions



Product Specifications		
Model No.	HCP-1021000	HCP-1031000
Material	Aluminium + Plastic	
Colour	Black	White
IP Rating	IP20	
Track Type	Single Circuit	
Input Voltage	240v	
Protection Class	1 (Requires Earth)	
Lamp Base	Built in LED	
Lamp Wattage	1x 3/5/7w	
Colour Temp	TRI-Colour - 3000k , 4000k, 5500k	
Lumens	240lm-560lm, 255lm-595lm, 270lm-630	
CRI	> 80	
Wiring	Parallel	
Dimmable	Yes - Triac Dimmable	
Warranty	5 Years Replacement*	

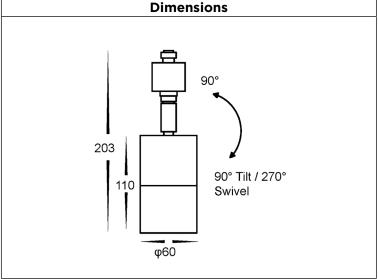

### **Important Safety Issues:**

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- · This form may be updated at any time due to product improvements, please check online installation form for most current version.

#### Steps for Installation:

- Make sure that the electrical circuit is free of voltage (master switch off)
- 2. Push down on outer part of track light adaptor
- 3. Insert track light into track making sure connection points are on correct side of track and twist into position
- 4. Release outer part of track light to allow for adaptor to lock into place
- 5. Colour temperature and wattage is preset to 3000k and 7w, to change remove cover from fitting by twisting anti clockwise and set aside. Remove globe and select desired colour temperature and wattage by moving switches on side of globe and then reinsert globe into lampholder by inserting the 2 circular pins into the lampholder and twisting clockwise.
- 6. Reattach cover by turning clockwise making sure not to overtighten.
- 7. Repeat these steps if more than 1 fitting is being installed
- 8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

## Steps for Changing Globe:

- 1. Remove the cover by twisting anti-clockwise and set aside, remove globe by also twisting anti-clockwise.
- Re-insert the appropriate globe by inserting the 2 circular pins into the lampholder and twisting clockwise. (Make sure not to exceed max wattage, see product label for correct info)
- 3. Reattach cover by turning clockwise making sure not to overtighten.

# Must be installed by a licensed electrician

**Contact Details:** 

8/133 Beauchamp Road Matraville NSW 2036 Australia Tel: 02 9381 8383

Email: sales@havitcommercial.com.au Web: www.havitcommercial.com.au

