


# 3/5/7w Tri Colour Track Light Kit Installation Instructions



## Product Specifications

|                  |  |             |
|------------------|--|-------------|
| Model No.        | HCP-1021002                                    | HCP-1031002 |
| Material         | Aluminium + Plastic                            |             |
| Colour           | Black  | White       |
| IP Rating        | IP20   |             |
| Track Type       | Single Circuit                                 |             |
| Input Voltage    | 240v   |             |
| Protection Class | 1 (Requires Earth) ⚡                           |             |
| Lamp Base        | Built in LED                                   |             |
| Lamp Wattage     | 2x 3/5/7w                                      |             |
| Colour Temp      | TRI-Colour - 3000k, 4000k, 5500k               |             |
| Lumens           | 2x 240lm-560lm, 2x 255lm-595lm, 2x 270lm-630lm |             |
| CRI              | > 80   |             |
| Wiring           | Parallel                                       |             |
| Dimmable         | Yes - Triac Dimmable                           |             |
| Warranty         | 5 Years Replacement*                           |             |

## Dimensions

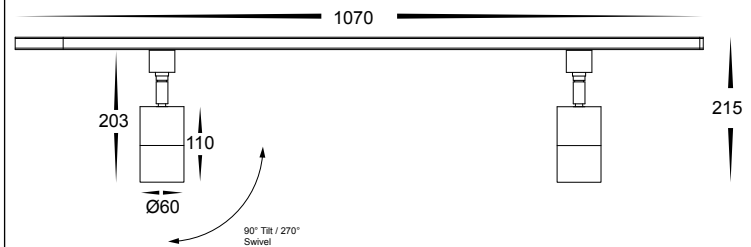

### Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

### Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove live end from track.
3. Remove cover from live end by undoing screw on top and set both aside
4. Connect live end to existing 240v Cable - Connect earth first then live and neutral
5. Reattach cover onto live end by reinserting screw and tighten, Make sure not to overtighten to avoid any damage.
6. Slide track onto live end and attach to ceiling using appropriate screws in positions already made in track.
7. Colour temperature and wattage is preset to 3000k and 7w, to change remove cover from fitting by twisting anti clockwise and set aside. Remove globe and select desired colour temperature and wattage by moving switches on side of globe and then reinsert globe into lampholder by inserting the 2 circular pins into the lampholder and twisting clockwise.
8. Reattach cover by turning clockwise making sure not to overtighten.
9. Repeat these steps if more than 1 fitting is being installed
10. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

### Steps for Changing Globe:

1. Remove the cover by twisting anti-clockwise and set aside, remove globe by also twisting anti-clockwise.
2. Re-insert the appropriate globe by inserting the 2 circular pins into the lampholder and twisting clockwise.  
(Make sure not to exceed max wattage, see product label for correct info)
3. Reattach cover by turning clockwise making sure not to overtighten.

**Must be installed by a licensed electrician**

### Contact Details:

8/133 Beauchamp Road  
Matraville NSW 2036  
Australia  
Tel: 02 9381 8383  
Email: sales@havitcommercial.com.au  
Web: www.havitcommercial.com.au

### Warranty Terms & Conditions\*



[www.havitcommercial.com.au](http://www.havitcommercial.com.au)

