

1. Adding Master Password (when Factory Reset Mode)

Step 1	Step 2	Step 3
<p>Tap on * and then # to enter setting mode</p>	<p>Enter a “123456” (default password) and tap on # to confirm</p>	<ol style="list-style-type: none"> 1. Press Number 1 (Admin Set) 2. Press Number 1 (Add Admin) 3. Input information <ul style="list-style-type: none"> - type password and press # and repeat (MUST remember the admin passwords) - scan fingerprint 5 times (same position)

2. Adding New Admin

Step 1	Step 2	Step 3	Step 4
Press on “*” and then “#” to enter setting mode.	Verify Admin by passwords or fingerprints	<p>If want to add Admin, please press “1” Admin Set</p> <p>If want to add User, please press “2” User Set</p>	<p>Press “1” again (Add Admin / Add User)</p> <p>Input information :</p> <ul style="list-style-type: none"> - type password and press “#” and repeat OR - scan fingerprint 5 times (same position) OR - tap the RFID Card on “card icon” (below number 5)

3. User Manage

Step 1	Step 2	Step 3	Step 4
Press on “*” and then “#” to enter setting mode	Verify Admin by passwords or fingerprints	<p>Under User Setting, you can see the following options:</p> <ol style="list-style-type: none"> 1. Add User 2. Modify User 3. Delete User 4. Manage Wireless 	Press “1” in Step 3, and you may add a User by entering the User number E.g. (010) and press “#” to confirm.

Step 5

You may register using the following options:

(1) Password

Enter 6 pin number and press “#” Repeat the step once more.

(2) Register Finger vein

Scan your preferred fingerprint 3 times to register.

(3) Setting Up RFID card

When prompted to input a new key, tap the RFID Card on the number pad area to complete setup

4. System Setting (Time Setting)

Step 1	Step 2	Step 3	Step 4
<p>Press on "*" and then "#" to enter setting mode.</p>	<p>Verify Admin and press "#" to confirm. Press "3" for System Setting</p>	<p>Under System Setting, you can see the following options:</p> <ol style="list-style-type: none"> 1. Set Date/ Time 2. Unlock Mode 3. Open Door Set 4. Language and Volume 	<p>Press "1" in Step 3, and enter the details in the following format:</p> <p>YY : MM : DD HH : MM</p> <p>press "#" to confirm</p>

5. System Setting (Language and Voice Volume Setting)

Step 1	Step 2	Step 3	Step 4
<p>Press on "*" and then "#" to enter setting mode.</p>	<p>Verify Admin and press "#" to confirm. Press "3" for System Setting</p>	<p>Under System Setting, you can see the following options:</p> <ol style="list-style-type: none"> 1. Set Date/ Time 2. Unlock Mode 3. Open Door Set 4. Language and Volume 	<p>Press "4" in Step 3, and you can see the following options</p> <ol style="list-style-type: none"> 1. Chinese 2. English 3. Volume Low 4. Volume High

6.System Setting (Restore Factory Setting/ Factory Reset)

Step 1	Step 2	Step 3	Step 4
Press on "*" and then "#" to enter setting mode.	Verify Admin and press "#" to confirm. Press "1" for Admin Setting	Under Admin Setting , you can see the following options: <ol style="list-style-type: none"> 1. Add Admin 2. Modify Admin 3. Delete Admin 4. Factory Reset 	Press "4" in Step 3, the system will ask you to Please Confirm . Press on "#" and the system will show Initializing . Once done, the system will say Initialize successfully

7.Delete Admin


Step 1	Step 2	Step 3	Step 4
Press on "*" and then "#" to enter setting mode.	Verify Admin and press "#" to confirm. Press "1" for Admin Setting	Under Admin Setting , you can see the following options: <ol style="list-style-type: none"> 1. Add Admin 2. Modify Admin 3. Delete Admin 4. Factory Reset 	Press "3" in Step 3, and you may delete an Admin by entering the Admin number E.g. (001) and press "#" to confirm. After that, The system will say Successful

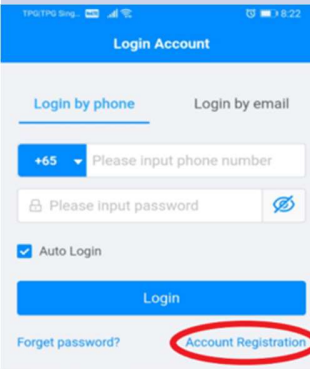
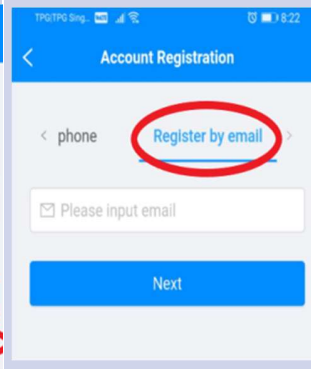
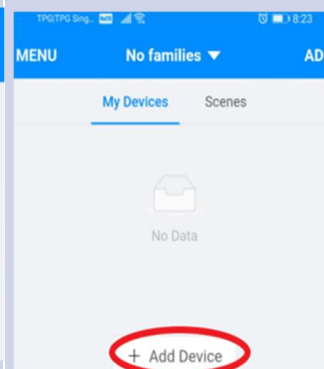
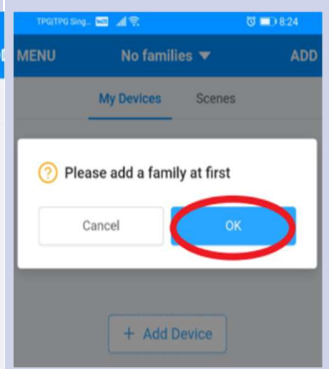
8.Delete User


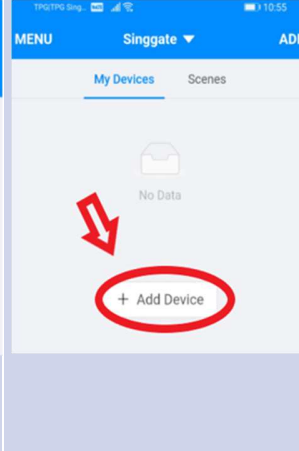
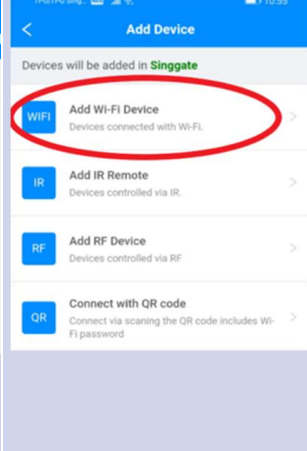
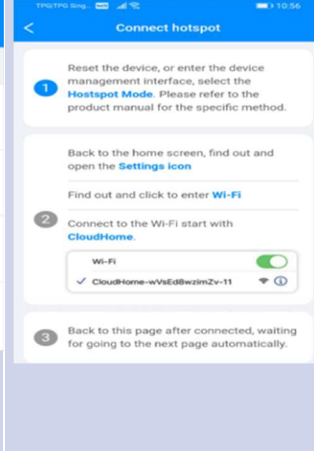
Step 1	Step 2	Step 3	Step 4
<p>Press on "*" and then "#" to enter setting mode.</p>	<p>Verify Admin and press "#" to confirm. Press "1" for Admin Setting</p>	<p>Under Admin Setting, you can see the following options:</p> <ol style="list-style-type: none">1. Add Admin2. Modify Admin3. Delete Admin4. Factory Reset	<p>Press "3" in Step 3, and you will see the following options:</p> <ol style="list-style-type: none">1. Delete by ID2. Delete by Type (Fingerprint, Card and Password)3. Delete All

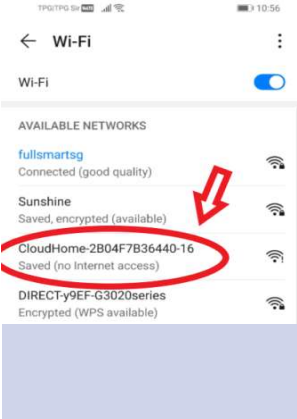


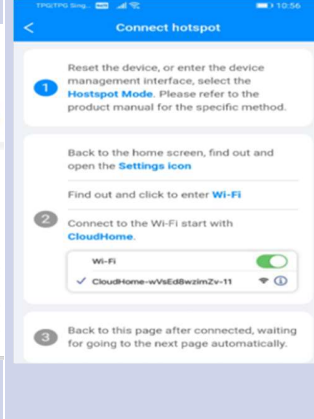
9. Connect to Wi-Fi (Please download USMARTGO)

Step 1	Step 2	Step 3	Step 4
<p>Press on “*” and then “#” to enter setting mode.</p>	<p>Verify Admin and press “2” User Setting</p>	<p>Press “4” Manage Wireless and you will see the following options:</p> <ol style="list-style-type: none"> 1. Add WIFI 2. Delete WIFI 3. Add Remote 4. Delete Remote 	<p>Press “1” Add WIFI to connect to Wi-Fi</p>

Step 5	Step 6	Step 7	Step 8
<p>Download USmart Go into your phone and register for an account first.</p> 	<p>Press the Add function and select Add Wi-Fi Device</p>	<p>Go to phone Wi-Fi and connect it to CloudHome and select your house Wi-Fi to connect</p>	<p>Once successful, your phone screen will show “Connected to server” and the system will say success.</p>

Step 5	Step 6	Step 7	Step 8
<p>Press Account Registration to register for an account</p> 	<p>Please Register by Email</p> 	<p>Press Add Device</p> 	<p>Press OK to add a family</p> 

Step 9	Step10	Step11	Step12
<p>Enter Family Name and press OK to proceed</p> 	<p>Press on Add Device</p> 	<p>Select Add Wi-Fi Device</p> 	<p>Once you have reached this page, go to Wi-Fi list on your phone (Refer to Step 13)</p> 

Step13	Step14	Step15	Step16
<p>Select the Wi-Fi name starting with CloudHome</p> 	<p>Press on Connect</p> 	<p>Ensure that the Wi-Fi has been Connected (No Internet Access)</p> 	<p>Return to the App and wait for a few second (As shown below)</p> 

Step17	Step18	Step19	Step20
<p>The app will start to search for Wi-Fi</p>	<p>Please select your home Wi-Fi (Ensure it is 2.4 GHz)</p>	<p>Ensure that the Wi-Fi name is correct and enter your Home Wi-Fi Password. Press Search Device to proceed</p>	<p>The app will show Connecting Wi-Fi. Do wait for 20-30 seconds (Depending on Wi-Fi connection)</p>
