

Lilitab Surface Basic Fixed Mount

Assembly Instructions

v5.0

TABLE OF CONTENTS

Assembly Preparation and Packing List	2
Assembly Instructions	3
Kensington Lock	4
Bolt Down Installation	5

FOR BASE PLATE INSTALLATION, YOU'LL NEED:


- ✓ Phillips screwdriver

FOR BOLT DOWN INSTALLATION, YOU'LL NEED:

- ✓ Powered drill/driver, preferably with impact action
- ✓ 4 x bolts or wood screws (m5, no.10, no.11, 3/16" or 13/64 diameter)

TO SECURE YOUR LILITAB YOU WILL NEED:

- ✓ Kensington compatible cable lock
- ✓ Kensington Desk Mount Anchor
- ✓ Loradar Anchor Plate



← Scan to watch
assembly videos on
our YouTube Channel!

GOT QUESTIONS? WE'RE HERE TO HELP!

EMAIL support@lilitab.com PHONE 888.705.0190

PACKING LIST



1 x Surface Basic Mount



4 x M3x7mm Head Mount
Security Screws



2 x M3x10mm Neck Security
Cover Screws



1 x Silver L Key

INCLUDED IF YOU ORDERED FLOOR BASE



1 x Compact Base



4 x 1/4-28 x 0.375 Compact
Base Screws


ASSEMBLY INSTRUCTIONS



- 1. Thread the charge cable** that came with your kiosk through the top of the mount pole. Line up the bottom of the mount pole with the four (4) screw holes in the compact base and attach using the **four (4) 1/4-28 x 0.375 Compact Base Screws**.



NOTE: You will need to hold the foot cover up and out of your way while bolting. If not using the compact base, attach to floor surface using template on page 5, and thread the cable through your substrate.



- 2. Foot Cover.** Slide the foot cover down the mount pole to cover the screws. Velcro will hold it in place once positioned.



- 3. Attach the Head Unit** using the **four (4) M3x7mm Head Mount Security Screws** and **Silver L Key**.

NOTE: Rotating the neck security cover 90° will make access to the screw openings easier to access.



Refer to your Lilitab Head Unit owner's manual for tablet installation instructions.



- 4. Neck Security Cover.** After you attach the Head Unit, slide the security cover up and secure in place using the **two (2) M3x10mm security cover screws** and **silver L key**.



NOTE: The security cover screws should be oriented such that they are parallel to the long edge of the Head Unit, as shown. If they're not, simply rotate the security cover.

KENSINGTON LOCK



You can use a Kensington Desk Mount Anchor and the Loradar Anchor Plate with a Kensington Lockhead to secure your kiosk on a counter/surface.

PURCHASE OPTIONS FROM AMAZON

Kensington Slim Lockhead:

<https://amzn.to/3lWAAod>


Kensington Desk Mount Anchor:

<https://amzn.to/3njssNU>

Loradar Anchor Plate:


<https://amzn.to/3Ga1wcc>

BOLT DOWN INSTALLATION

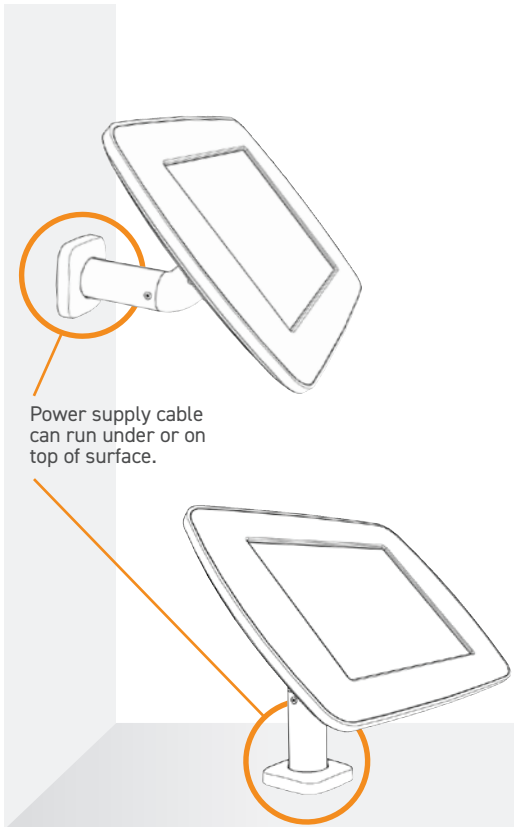

Power supply cable can run under or on top of surface.

The Lilitab Surface Basic Fixed Mount can be mounted horizontally or vertically to any hard surface using 2 x bolts, wood screws or other fastener suitable for your surface's substrate (m6, no.14 or 1/4" diameter). Use the mounting pattern to the right for proper alignment.

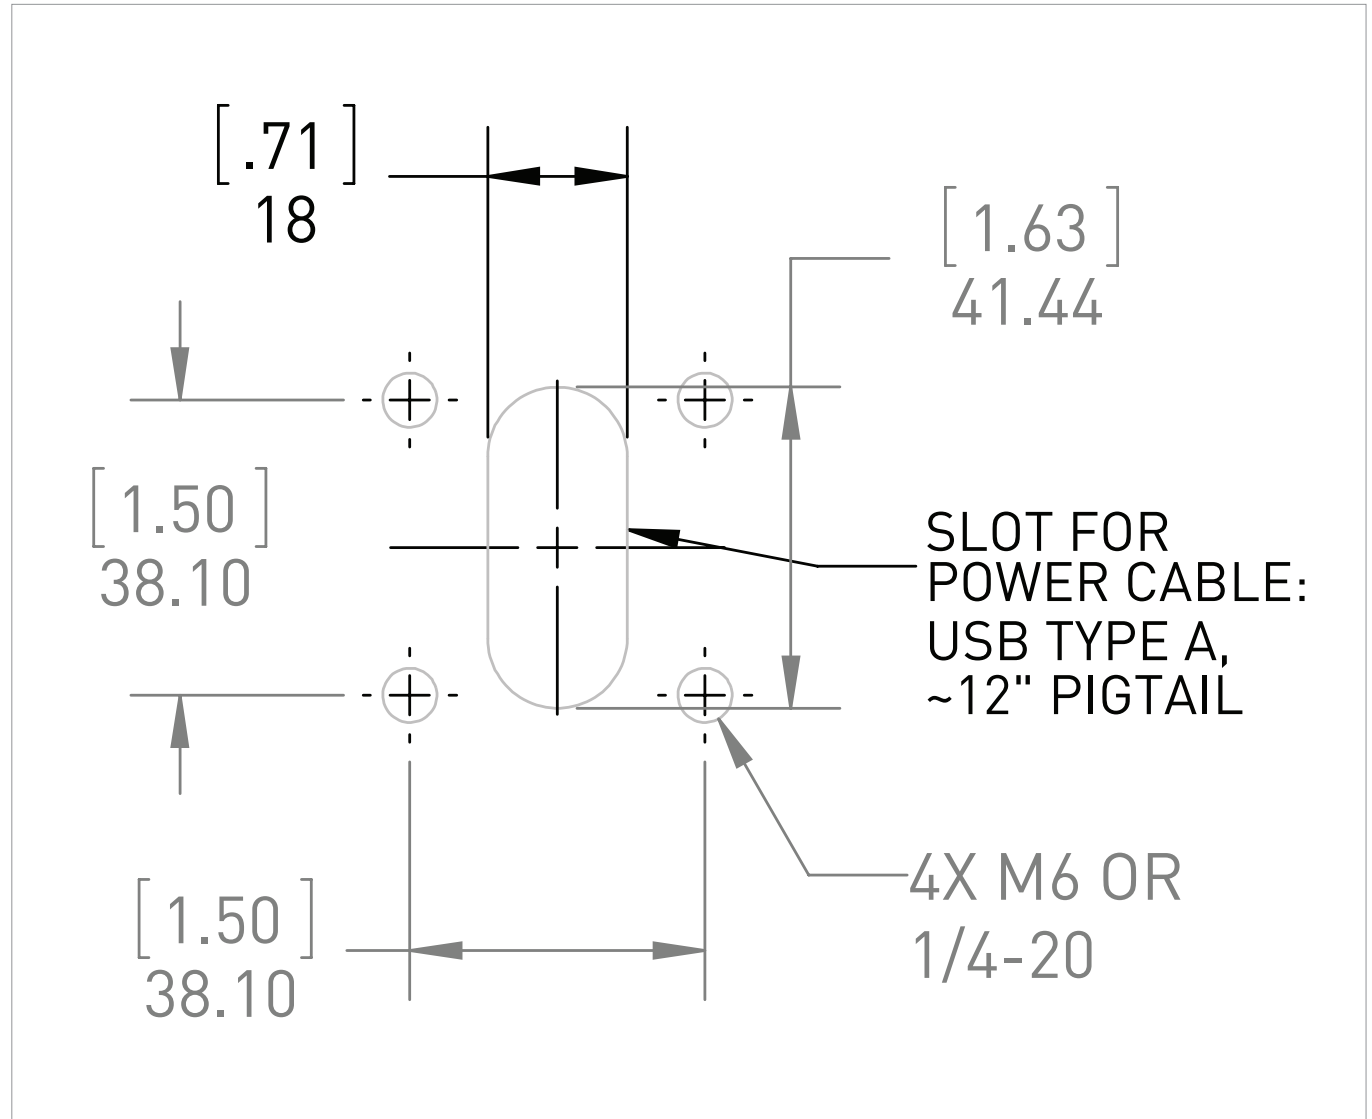

Mounting pattern (1:1)