

## WARRIOR GEN 2 SERIES

### (WATTAGE & CCT SELECTABLE)



#### Description

The **Warrior Gen 2 (Wattage and CCT Selectable)** wall pack series will light up your outdoor area . It provides a long-lasting and energy saving solution while being **Dark Sky friendly**.

The rugged housing offers advanced thermal management and protection against outdoor environments without compromising aesthetics.

All fixtures include a 3 pin socket for a photocell complete with a shorting cap. All fixtures also include a receptacle to field install an occupancy sensor.

#### Electrical Specifications

LED Engine:: Lumileds 3030  
 Available Wattages: 100W Selectable  
 (select between 100W, 75W, 50W, and 25W)  
 Power Factor: >0.90  
 CRI: >80  
 Operating Temperature: -40 to 70°C (-40 to 158°F)  
 Storing Temperature: -40 to 80°C (-40 to 176°F)  
 Storage Humidity: <95% RH  
 Lumen Maintenance: L70>50,000 hours  
 Available Voltages: CUNV 120-347V

#### BUG Rating

B2-U2-G3

#### Certifications and Warranty

cETLus and DLC Premium with 6 year warranty  
 3000K or warmer must be selected for IDA certification

#### Features:



# Warrior Gen 2

## 100W Wattage and CCT Selectable




### Product Information

#### 100W Selectable

Installation:	Wall Mounted
Material:	Housing: Die-cast Aluminum / Lens: Polycarbonate
Finish:	Powder coat
System power (W):	100W(100%)/75W(75%)/50W(50%)/25W(25%)
Fixture lumen output (lm):	13000(100%)/9750(75%)/6500(50%)/3250(25%)
System efficiency (lm/W):	130
LED Engine:	Lumileds 3030
Lumen Maintenance @L70 (hrs):	>50,000


### Packaging

Net weight lamp (kg / lb):	2.60 / 5.73
Gross weight carton (kg / lb):	3.10 / 6.83
Master carton dimensions (mm / in):	310x215x275 / 12.20x8.46x10.83
Quantity per carton:	1




### Code composition

Series	Model	Mounting	Wattage - Lumens	Optics					
WP	Wall Pack	WA2	Warrior Gen2	WM	Wall Mount	100WS-130L	100WS-13000lm	T2	Type II
								T3	Type III
								T4	Type IV




CCTS	CRI	Voltage	Dimming	Finish	Accessories
3000K 4000K 5000K Selectable	80 80+	CUNV 120-347V	D 0-10V Dimming	DB Dark Bronze (Standard) BK Black	NA No Accessories PC Photocell OS Occupancy Sensor EB Emergency Battery Pack RC Occupancy Sensor Remote Control RCPC Photocell Remote Control


## INSTRUCTION TO SELECT WATTAGE

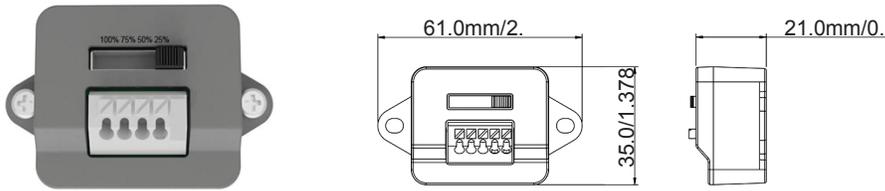


1. Loosen screws and open the door to setting area.
2. Turn left or right “Adjustable button” to get required wattage. (See below picture)

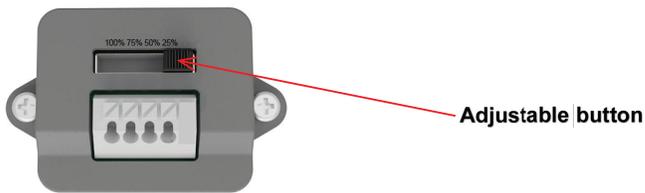

## INSTRUCTION TO SELECT CCT

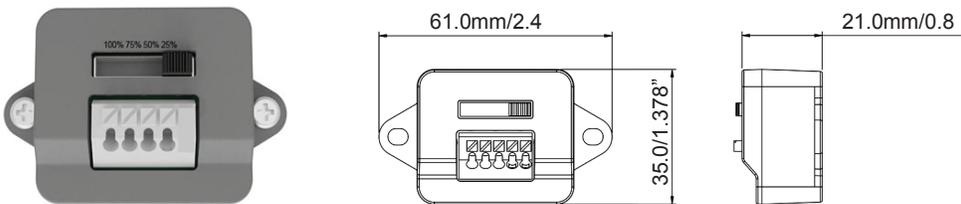

1. Loosen screws and open the door to setting area.
2. Turn left or right “Adjustable button” to get required CCT.

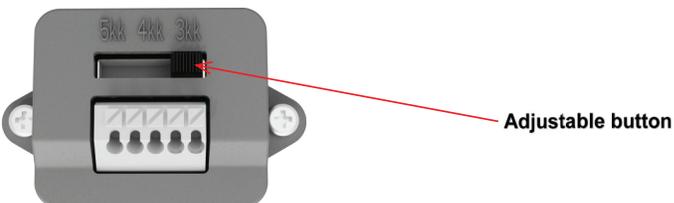

## ACCESSORIES

RC - Occupancy Sensor Remote



RCPC - Photocell Remote

