

Installation Instructions

LED HIGH BAY LIGHT

WARNING

To avoid the risk of fire, explosion, or electric shock:

this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes. *Verify power wire is by following per under applicable electrical codes.

To avoid electric shock:

- Be certain electrical power is OFF before and during installation and maintenance.
- Luminaires must be supplied by a wiring system suitable per local code with an equipment grounding conductor.

To avoid burning hands:

- Before to performing maintenance, ensure Luminaire is allowed to cool after powering off for a period of 30 minutes.

To avoid product degradation:


- Do not operate in ambient temperatures above those indicated on the luminaire data sheet.
- Use proper supply wiring as specified on the luminaire data sheet.
- Avoid use in environments containing sulfur, chlorine or other halides, methyl acetate or ethyl acetate, cyanoacrylates, glycol ethers, formaldehyde, or butadiene.
- Make sure the supply voltage is within the voltage range stated on the data sheet.
- Aircraft cable mounting is **always** recommended.

MOUNTING

PENDANT EYEBOLT MOUNTING


STEP 1

Thread the enclosed eyebolt hook into the top of the luminaire housing, and tighten securely. Tighten the set screw to prevent the eyebolt from loosening.



STEP 2

Use a chain, cable, mounting hook, or other mounting hardware to suspend the luminaire. Make sure the mounting hardware is securely attached to a stationary structure and strong enough to safely be attached to a stationary structure and strong enough to safely suspend the luminaire.




STEP 3

Refer to the Wiring Diagram to make electrical connections.

CEILING MOUNTING:


STEP 1

Install the fixings of the ceiling mounting bracket to the back of the lamp, then connect the ceiling mounting bracket with the mounting bracket fixing parts.

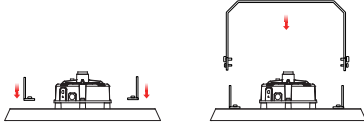


STEP 2

Using the yoke mount bracket as a template, mark and drill holes in the ceiling or other solid structure to which the luminaire will be attached.




STEP 3

Fix the lamp mounting bracket to the mounting surface with bolts and nuts.



STEP 4

If the luminaire will be installed at an angle, tighten the mounting bracket adjustment bolts only partially tight. Otherwise, securely tighten these bolts.



CEILING BRACKET HOLE DIMENSIONS



REFER TO THE WIRING DIAGRAM TO MAKE ELECTRICAL CONNECTIONS

