


Mini Digital Display Meter

Model Explanation

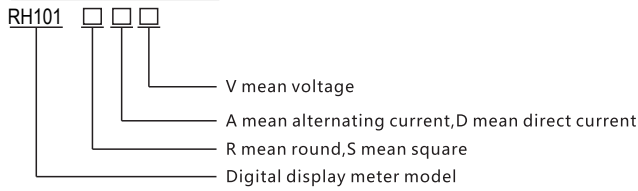

Summary

Mini digital display voltage meter

RH101 series products two-wire three-way AC, DC digital display voltage meter.

- Products use 2.5 inches long life LED digital tube display with compact square enclosure, convenient installation.
- Products measurement range AC 80V-500V, DC 8-150V, frequency 50/60HZ.
- Products use two wire system, AC connected in zero line and fire line directly, DC have polarity reverse connection protection function.



Working Condition

- Ambient temperature: -10 ~ +55°C; ■ Air relative humidity: 10-80% (no condensation)
- Working pressure: 80-106KPa; ■ Sunniness: no sunniness

Technical parameter

- Working voltage: AC 80-500V, DC 8-150V;
- Working frequency: 50/60HZ;
- Working current: ≤20MA;
- Measuring accuracy: 1.0;
- Measuring rate: >200MS/time;
- Mounting-hole size: Φ22mm;

Style	Name	Type	Color	voltage	Outline Dimensions
	Φ22 Mini Digital Display Meter	RH10122-RAV	<ul style="list-style-type: none"> ○ White ● Green ● Red ● Yellow ● Blue 	AC80-500V	
	Φ22 Mini Digital Display Meter	RH10122-SAV	<ul style="list-style-type: none"> ○ White ● Green ● Red ● Yellow ● Blue 	AC80-500V	
	Φ22 Mini Digital Display Meter	RH10122-RDV	<ul style="list-style-type: none"> ○ White ● Green ● Red ● Yellow ● Blue 	DC5-30V DC30-120V	
	Φ22 Mini Digital Display Meter	RH10122-SDV	<ul style="list-style-type: none"> ○ White ● Green ● Red ● Yellow ● Blue 	DC5-30V DC30-120V	