


# Instruction Manual Smart Curtain Switch Wi-Fi+RF



English



- Bitte scannen Sie den QR-Code, um das deutsche Handbuch, das Installationsvideo und die Funktionseinführung zu erhalten
- Escanee el código QR para obtener el manual en español, el video de instalación y la introducción de la función
- Veuillez scanner le code QR pour obtenir le manuel en français, la vidéo d'installation et l'introduction des fonctions
- Отсканируйте QR-код, чтобы получить руководство на русском языке, видео по установке и описание функций
- Scansionare il codice QR per ottenere il manuale in italiano, il video di installazione e la guida alle funzionalità. Video di installazione e funzionalità
- Leia o código QR para obter o manual em português, o vídeo de instalação e a introdução das funções
- Zeskanuj kod QR, aby uzyskać instrukcje, filmy instalacyjne i funkcje
- من فضلكم قم بمسح رمز الاستجابة السريعة (QR-code) للحصول على دليل المستخدم باللغة العربية وفيديو التثبيت ووصف الوظائف



请扫描二维码获取说明书手册、安装视频和功能介绍

## Product Description

This new designed glass panel wireless touch smart curtain switch is designed with many new updates. The WiFi+RF version easily replaces traditional switches with a variety of ways to control. Multi-control association is added into Tuya Smart Life App as a new feature to control with other smart switches, together with the backlight on/off and relay status when power off. Its scratch resistance glass panel is suitable for different decoration styles with its best value.

### Transportation:

The products shall be free from severe vibration, impact, exposure to rain, dumping and other problems during transportation, and shall comply with the provisions of the marks on the packing boxes.

### Safety Information:

1. Risk of Electric Shock: Electricity can cause personal injury and property damage if handled improperly. If you are not sure about any part of these instructions, please seek professional assistance from a qualified Electrician.
2. Do not disassemble, reassemble, modify, or attempt to repair the product by yourself.
3. This product has no waterproof and dustproof function.

### Storage:

Products should be put in the warehouse where the temperature is between the range -10°C ~ +45°C, and the relative humidity <=70%RH, indoor environment with no acid, alkali, salt and corrosive, explosive gas, flammable matter, protected from dust, rain and snow.

### Technical Parameters:

Model: WS-USR-C / WS-EUR-C  
Working Voltage: 90-250V AC, 50/60Hz  
Max. Current: 2.5A/Gang; Total 2.5A  
Load Power: <=600W  
Standby Power: <=0.5W  
Wireless Protocol: Wi-Fi 2.4GHz IEEE 802.11 b/g/n  
Standby Consumption: 0.1mA  
Wireless Range: 30 Meters(Indoor)

### Warnings:

Turn off the power at the circuit breaker and test that power is off before wiring.

## Installation

### Note:

- Make sure that the power at the circuit breaker is off before wiring.
- Neutral Wire is required. Confirm the wall box contains a Neutral Wire (typically white). If the wall box don't have a Neutral Wire, please try another location at your home or call a professional electrician to install the switch.
- The wire colors indicated in this manual are the usual colors and may differ in some houses.
- Ensure the wire conductors are securely fastened to each wire.
- Ensure the Wi-Fi signal is steady and normally working before wiring.
- If you don't have any wiring experience, please call a professional electrician.

### Step 1

- Turn off the circuit breaker and use the electrical tester to test the power.
- Ensure the circuit breaker is off before wiring.




### Attention:

Please disconnect the power supply before installing or removing the device for avoiding irreversible damage on the device from the electric current or some unpredictable problems such as lamp flashing.

### Step 2

- Remove the old switch

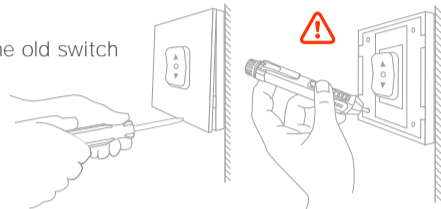

### Step 3


- Remove the switch and pull it away from the wall. Identify Line/Load Wire (Note: The color of your wire may be different from the color shown on the manual.)

### Verify power is off

- We recommend you remove the faceplate from the old switch and use an electrical tester to test all wires connected to the switch to ensure there is no voltage in the circuit.
- You may need to turn off more than one circuit breaker.

### Step 4

- Take pictures of the wiring



- Follow the wiring diagram to connect the switch wires to the wires in the wall box with the wire conductors.

English

1

2

English

English


3

4


English

### Step 5

- Open the switch panel from the bottom of the switch with a screwdriver

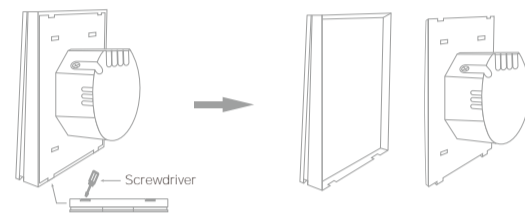

- Mount the switch with the provided screws and snap the wall plate on it.



### Step 6

- Turn the power back on at the circuit breaker and then switch the light on.

## Preparation For Use

1. Download MOES App on App store or scan the QR code



MOES App is upgraded as much more compatibility than Tuya Smart/Smart Life App, functional well for scene controlled by Siri, widget and scene recommendations as the fully new customized service. (Note: Tuya Smart/Smart Life App still works, but MOES App is highly recommended)

2. Registration or Log in



- Download "MOES" Application.
- Enter the Register/Login interface: tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a MOES account.


## Steps for connecting the APP to the device

### Method One:

1. Make sure your phone is connected to Wi-Fi and Bluetooth.



2. Scan the QR code to configure the network guide.

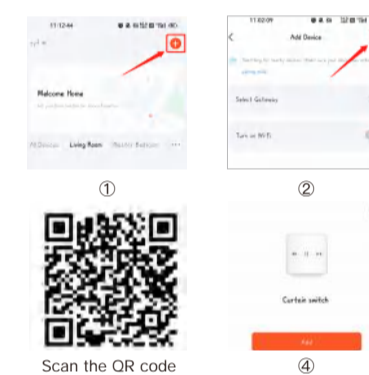

English

5

English

6

English

7

English

8

English

9

English


### Method Two:

1. Make sure your phone is connected to Wi-Fi and Bluetooth.



2. Reset: Press the switch button for 6 times, and hold on the 6th time, then release until the blue indicator on the switch flashes fast. Pair/Reset is successful.


3. Open the MOES App, click the "+" in the upper right corner, enter "Add Device", the device will appear in "discovering devices", click "Add"

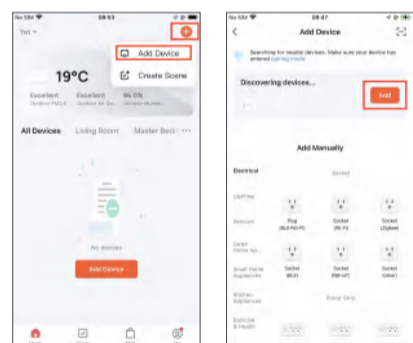

10

English

4. Enter Wi-Fi Password and click "Next", waiting for completing the connection. Add the device successfully, you can edit the name of the device to enter the device page by click "Done".

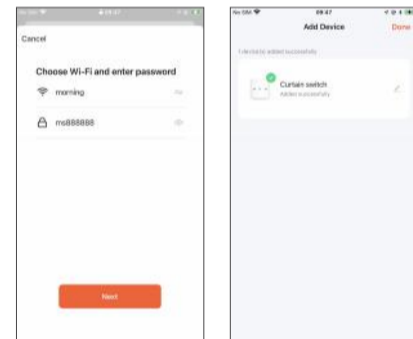

5. Enjoy your smart life with home automation.



English

11

### How to pair/reset Wi-Fi

Press the switch button for 6 times, and hold on the 6th time, then release until the blue indicator on the switch flashes fast. Pair/Reset is successful.

Remote radio frequency (RF) link method:  
Pair and clear up the RF code

#### 1. How to pair the RF code

Press and hold the device touch button for more than 5 seconds until you see the blue indicator of the button blinking. Enter Remote Radio Frequency (RF) pairing, and then click the corresponding button on the remote control to successfully pair.  
**Note: This operation can only pair one button**

#### 2. How to clear up the RF code

Press and hold the device touch button, and the indicator light flashes. Do not release your finger until the indicator light stops flashing and the code is cleared successfully.  
**Note: This operation can only clear one button, repeat the operations for clearing other codes.**

### FAQ

1. After the device is installed, why does the light not respond when I click the switch button?  
A: Please cut off the power supply and check whether the connection is correct according to the instructions.
2. Why is there no reset button on my switch?  
A: Hello, generally speaking, the reset button of the switch device is the switch button itself. You can press the switch button to configure the APP according to the instructions. The power indicator light will start to blink when entering into successful pairing mode.
3. What if my smart switch malfunctions and doesn't respond for a long time?  
A: Hello, please try to reset the device. Firstly remove the smart switch from your APP and re-configure the network for use.

## Enter MOES in Alexa APP

### 1. Complete product networking configuration in the App

Complete the device's networking configuration according to the prompts in the App. Note: In the App, change the name of the device to an easily identifiable name such as Alexa: names are usually in English, such as "bed light".

### 2. Configure the Amazon Echo device

(If you have already configured Amazon Echo, you can skip this step. The following instructions are based on the iOS client.)

- ① Make sure your Amazon Echo device is powered on and connected to a Wi-Fi network.
- ② Open the Alexa APP on your phone and log in
- ③ tap on the menu in the upper left corner of the Home page, select "Settings" and tap "Set Up A New Device" to set up the Amazon Echo.
- ④ Choose your Amazon Echo device type and language for connecting.
- ⑤ Press and hold the small dot on the device until the light turns yellow.
- ⑥ Click "Continue" to connect to the hotspot, connect to the Amazon Echo hotspot, and return to the APP page.
- ⑦ Click "Continue" to find and connect to your home Wi-Fi network.

- ⑧ Amazon Echo will take a few minutes to try to connect to the network.

⑨ After the network connection is successful, tap "Continue". An introduction video will appear. After the video ends, tap "Continue" to jump to the Alexa Home page.

⑩ You have now completed the Amazon Echo's configuration process

### 3. Key step —— Link Skill

- ① Tap on "Skills" in the Alexa App menu.
- ② Then search for "MOES". Tap "Enable" to enable the Skill.
- ③ Enter the App account and password, then tap "Link Now" to link your App account to enable the Skill. Now you can start your smart home journey


### 4. Common commands

Control the device via voice commands, now you can control your smart device with Echo. You can control your device (such as your bedroom light) with the following commands:


- "Alexa, open <device name>."
- "Alexa, close <device name>."
- "Alexa, pause device."
- "Alexa, resume device."
- "Alexa, set the <device name> to thirty percent."
- "Alexa, increase <device name> by ten percent."
- "Alexa, decrease <device name> by twenty percent."

## How to Connect an App/Smart Device to Google Assistant

1. Make sure the smart device has been added to the MOES App and that the device is online.
2. Make sure the Google Home App is installed.



3. Click Me in the bottom right corner, click Google Assistant, click Link with Google Assistant



15

English


4. Link an account to control MOES on any device, Click Continue



5. Click Agree and Link



6. Wait for it to finish loading and your smart device will be synced to Google Assistant. Now you can use Google Assistant or Google Home App to control your smart devices. Next, you can assign rooms to your devices in the Google Home App.



English

16

English

## SERVICE

Thank you for your trust and support to our products, we will provide you with a two-year worry-free after-sales service (freight is not included), please do not alter this warranty service card, to safeguard your legitimate rights and interests. If you need service or have any questions, please consult the distributor or contact us.

Product quality problems occur within 24 months from the date of receipt, please prepare the product and the packaging, applying for after-sales maintenance in the site or store where you purchase: If the product is damaged due to personal reasons, a certain amount of maintenance fee shall be charged for repair.

We have the right to refuse to provide warranty service if:

1. Products with damaged appearance, missing LOGO or beyond the service term
2. Products that are disassembled, injured, privately repaired, modified or have missing parts
3. The circuit is burned or the data cable or power interface is damaged
4. Products damaged by foreign matter intrusion (including but not limited to various forms of fluid, sand, dust, soot, etc.)

## RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.



## WARRANTY CARD

### Product Information

Product Name \_\_\_\_\_  
Product Type \_\_\_\_\_  
Purchase date \_\_\_\_\_  
Warranty Period \_\_\_\_\_  
Dealer Information \_\_\_\_\_  
Customer's Name \_\_\_\_\_  
Customer Phone \_\_\_\_\_  
Customer Address \_\_\_\_\_

### Maintenance Records

Failure date	Cause Of Issue	Fault Content	Principal

Thank you for your support and purchase at we Moes, we are always here for your complete satisfaction, just feel free to share your great shopping experience with us.



If you have any other need, please do not hesitate to contact us first, we will try to meet your demand.

## FOLLOW US

f @moessmart    t @moes\_smart    y MOES.Official  
@moes\_smart    @moes\_smart    www.moes.net

AMZLAB GmbH  
Laubenhof 23, 45326 Essen  
Made in China

EVATOST CONSULTING LTD  
Address: Suite 11, First Floor, Moy Road Business Centre, Taffs Well, Cardiff, Wales, CF15 7QR  
Tel: +44-292-1680945  
Email: contact@evatmaster.com

Manufacturer:  
WENZHOU NOVA NEW ENERGY CO. LTD  
Address: Power Science and Technology Innovation Center, NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing, Zhejiang, China  
Tel: +86-577-57186815  
After-sale Service: service@moeshouse.com

English

17

English

18

English

19

English